


# HD Book

## *SAT platform*

---

*(Digital Satellite Television)*

Compatible High Definition  
receivers for the Italian market:  
baseline requirements

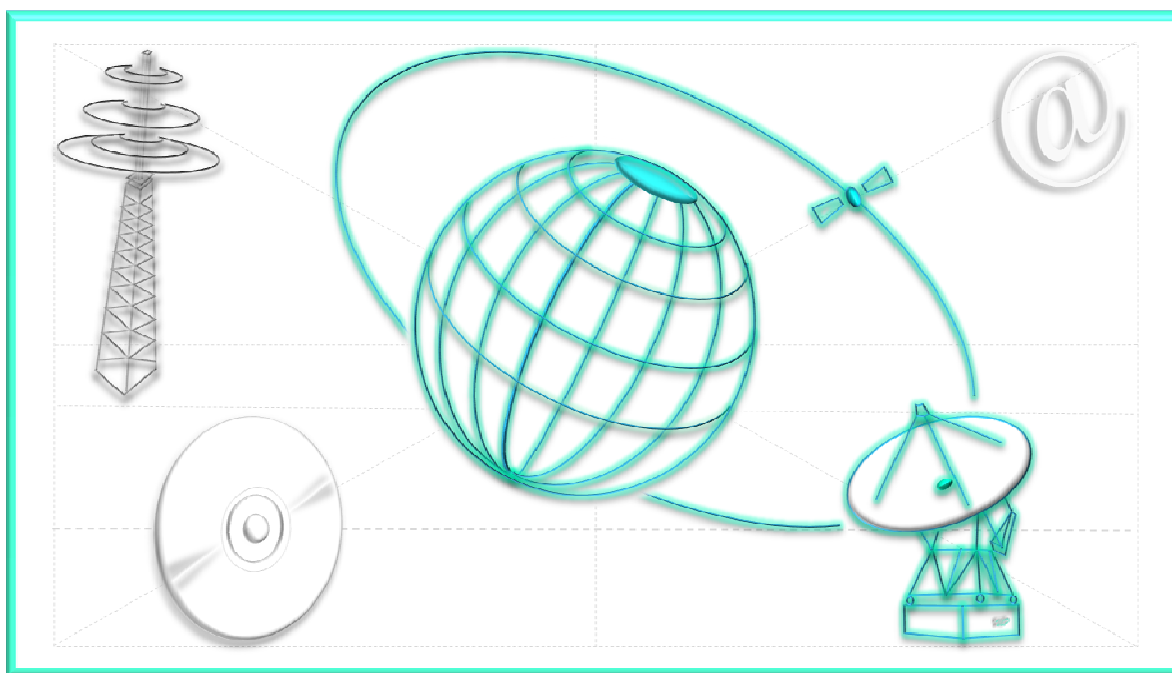

*Final 1.0*

**HD**  
FORUM ITALIA





## ***HD Book Collection***



**Compatible High Definition  
receivers for the Italian market:  
baseline requirements**

***SAT platform***  
*(Digital Satellite Television)*

---



***Important notice***

Individual copies of the present document can be downloaded from:

<http://www.hdforumitalia.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF).

In case of dispute, the reference shall be a printed copy provided by Associazione HD Forum Italia

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this document is available at Associazione HD Forum Italia

If you find errors in the present document, please contact Associazione HD Forum Italia

***Copyright Notification***

No part may be reproduced except as authorized by written permission.

The copyright and the foregoing restriction extend to reproduction in all media.

The content of this document takes on and refers to the Copyright law, as cited in article 70 and article 10 of Bern Treaty. For reproduction rights, Associazione HD Forum Italia remains at the disposal of the rights holders who could not be contacted.

All trademarks and logos mentioned herein belong to their respective owners.

Associazione HD Forum Italia will not be held liable for any damages caused or alleged to be caused either directly or indirectly by this document.

Any eventual legal controversial will be disputed at Rome's Court of competent jurisdiction.

Front cover design by Marco Pellegrinato.

Editor copyright: © 2010 Associazione HD Forum Italia, on behalf of its founding members, and Tivù, on behalf of its founding members.

Published by Associazione HD Forum Italia.  
All rights reserved.

## Table of Contents

1	Foreword.....	11
1.1	Compliance notation.....	12
1.2	Acknowledgments .....	12
2	Document History.....	15
3	References.....	17
4	Definitions and abbreviations .....	21
4.1	Definitions.....	21
4.2	Abbreviations.....	21
5	The HD-Book SAT .....	23
5.1	Terminology and notation .....	23
5.2	Broadband Features.....	24
5.2.1	Broadband Addendum mapping.....	24
5.2.2	Broadband Connectivity Programme: Easy-net.....	25
5.3	Linkage with other organizations .....	25
5.4	Graceful Degradation .....	25
6	Basic requirements .....	27
6.1	Hardware requirements for the receiver .....	27
6.1.1	Satellite Front End & Signal Decoding.....	27
6.1.1.1	Mandatory features.....	27
6.1.1.2	Recommended features.....	29
6.1.2	Interaction Channel.....	29
6.1.2.1	Wireline interaction channel.....	30
6.1.2.2	Mobile interaction channel .....	32
6.1.2.3	Presentation of Interaction Channel Type to Applications .....	32
6.1.2.4	User Instructions.....	32
6.1.3	Memory.....	32
6.1.4	I/O Connectors.....	33
6.1.4.1	Mandatory Connectors.....	33
6.1.4.2	Optional Connectors .....	35
6.1.4.3	Audio outputs matrix .....	36
6.2	Remote Control .....	37
6.2.1	Introduction .....	37
6.2.2	Overview.....	37
6.2.3	Generic functional description of the remote control .....	38
6.2.4	General Recommendations .....	38
6.2.4.1	The Main Remote .....	39
6.2.4.2	Single hand friendly .....	39
6.2.4.3	Clear structure .....	39
6.2.4.4	Channel selection .....	39
6.2.4.5	TV controls.....	39
6.2.4.6	Now and Next .....	39
6.2.4.7	Navigation keys.....	39
6.2.4.8	Dimensions .....	39
6.2.5	The Numeric Pad.....	39
6.2.5.1	Overall Function Description.....	39
6.2.5.2	Requirements for the Numeric Pad.....	40
6.2.5.2.1	Time-out for channel selection .....	40
6.2.5.2.2	Labelling of Numeric Pad keys.....	40
6.2.6	Interactive Pad.....	40
6.2.6.1	Overall Function Description.....	40
6.2.6.2	Requirements for Interactive Pad .....	40
6.2.7	The Navigation Pad .....	41

6.2.7.1	Overall Function Description.....	41
6.2.7.2	Requirements for Navigation Pad.....	41
6.2.8	The TV Pad.....	41
6.2.8.1	Overall Function Description.....	41
6.2.8.2	Requirements for TV Pad .....	42
6.3	Remote control keys detailed specifications.....	42
6.3.1	The Numeric Pad.....	42
6.3.2	The Interactive Pad.....	42
6.3.3	The Navigation Pad .....	43
6.3.4	The TV Pad.....	43
6.3.5	Other Keys.....	44
6.4	Interaction between (proprietary) receiver GUI and MHP applications.....	44
6.5	Requirements for the “Undo” Function .....	44
6.5.1	Preface .....	44
6.5.2	General Requirements.....	45
6.5.3	States of the IRD .....	45
6.5.4	Other groups’ proposals for key mapping.....	45
6.5.5	Keys and Labelling .....	45
6.5.6	Key mapping.....	45
6.6	Requirements for Text Entry Function .....	46
6.6.1	The present situation for text input in I-TV.....	46
6.6.2	Rules for « Request Focus » .....	46
6.6.3	Text Entry General Requirements .....	46
6.6.4	Key Pad Suggested assignment for text entry.....	47
6.6.4.1	Standard Characters Subset.....	47
6.6.4.2	Special Characters Subset .....	47
6.6.5	Text Entry Functions.....	48
6.6.6	Text Entry Devices.....	49
6.6.7	Text Entry Layering.....	49
6.6.8	Text Entry Layering - Underlying Considerations .....	49
6.6.9	MHP applications and Text entry functionality.....	50
6.6.9.1	MHP applications and Text entry sample class .....	50
7	Service Information & Channel Selection.....	51
7.1	DVB Locator .....	51
7.2	SI and PSI Information .....	51
7.2.1	Notation .....	51
7.2.2	Program Map Table (PMT) .....	52
7.2.2.1	Multiple components of the same type .....	52
7.2.2.2	HD-specific elementary stream types .....	53
7.2.2.3	Supplementary Audio.....	53
7.2.2.3.1	DVB solution.....	53
7.2.2.3.2	Enhanced AC-3 solution.....	53
7.2.3	Network Information Table (NIT) .....	53
7.2.3.1	Satellite delivery system descriptor.....	54
7.2.4	Bouquet Association Table (BAT).....	54
7.2.5	Service Description Tables (SDT) .....	54
7.2.5.1	Service Types .....	55
7.2.5.2	Running status.....	55
7.2.6	Event Information Table (EIT).....	55
7.2.6.1	Event Information Descriptors.....	55
7.2.6.2	Carriage of EIT.....	56
7.2.6.3	EIT schedule compression.....	56
7.2.7	Summary of mandatory tables.....	56
7.3	Private Data .....	57
7.3.1	Logical Channel Descriptor.....	57



7.3.1.1	Descriptor_tag.....	58
7.3.1.2	Service_id.....	58
7.3.1.3	Visible_service_flag.....	58
7.3.1.4	Reserved.....	58
7.3.1.5	Logical_channel_number.....	58
7.3.2	The Logical Channel Numbers (LCN).....	59
7.3.3	Network operator rules.....	59
7.3.3.1	Multiples LCNs for a single service.....	59
7.3.3.2	Invisible services.....	59
7.3.4	Receiver rules.....	59
7.3.4.1	General rules.....	60
7.3.4.2	Logical channel number zero.....	60
7.3.4.3	Invisible services.....	60
7.3.4.4	Service List management.....	60
7.3.4.4.1	First initialisation.....	60
7.3.4.4.2	Service List update.....	61
7.3.4.5	Network re-configuration.....	61
7.3.4.6	Change of LCN numbering scheme.....	61
7.3.5	HD Simulcast Logical Channel Descriptor.....	61
7.3.5.1	Descriptor_tag.....	62
7.3.5.2	Service_id.....	62
7.3.5.3	Visible_service_flag.....	62
7.3.5.4	Reserved.....	62
7.3.5.5	Logical_channel_number.....	62
7.3.5.6	HD simulcast LCN operation.....	62
7.4	Service-variation options.....	64
7.5	Receiver functions.....	64
7.5.1	Service Change.....	64
7.5.1.1	Audio language.....	64
7.5.1.2	CA controlled services.....	64
7.5.1.3	MHP services.....	64
7.5.2	Service Not Available.....	64
7.5.3	Active Format Descriptor.....	64
7.5.3.1	Syntax and Semantics.....	65
7.5.3.2	Valid Values for Descriptor.....	65
7.5.3.3	Behaviour of receiver in presence of AFD.....	65
7.5.3.4	Analogue output of the receiver.....	65
7.5.3.5	AFD and HDMI.....	65
7.6	Network Connection (Tuning).....	66
7.6.1	General Requirements.....	66
7.6.2	First Installation Procedure.....	66
7.6.3	Manual Full Scan Procedure.....	66
7.6.3.1	Update.....	66
7.6.3.2	Re-install.....	67
7.6.4	Manual Scan Procedure (Single Channel).....	67
7.6.5	Automatic service list update.....	67
7.6.5.1	Default settings for automatic scan.....	68
7.6.6	Automatic Ordering of Channels and Services in absence of LC descriptor acquisition.....	68
7.6.7	Network evolution.....	68
7.6.8	Default channel numbering of services.....	68
7.7	User interface to the SI carried data.....	69
7.7.1	Timer.....	69
7.7.2	Access to the Service list.....	69
7.7.3	Access to the list of service-bound MHP applications.....	70

8	Resident Software and API .....	71
8.1	Services .....	71
8.1.1	Video Dripping .....	71
8.1.2	Teletext .....	71
8.1.3	Subtitling .....	71
8.1.3.1	DVB Subtitling .....	71
8.1.3.2	Teletext Subtitling .....	72
8.2	Resident Software .....	72
8.2.1	Resident Manufacturer Specific Applications .....	72
8.2.1.1	Navigator .....	72
8.2.1.1.1	Handling of input events by the Navigator .....	72
8.2.2	Parental Control .....	72
8.3	Multimedia Home Platform .....	73
8.3.1	Auto-start Applications .....	73
8.3.2	Interaction between Resident and Downloaded Applications .....	74
8.3.3	SDRAM Memory Management .....	74
8.3.4	Receiver properties .....	74
8.3.5	Behaviour with mixed SD/HD applications .....	74
8.4	Application Environment(s) for broadband media delivery .....	75
8.4.1	Procedural Application Environment .....	75
8.4.1.1	APIs for Streamed CoD .....	75
8.4.1.1.1	Player operations .....	76
8.4.1.1.2	Time-setting operations .....	76
8.4.1.2	APIs for Download CoD .....	76
8.4.2	Declarative Application Environment .....	77
8.5	Resident applications related to broadband media delivery .....	77
8.5.1	History .....	77
8.5.2	Bookmarks .....	77
8.6	Maintenance and Upgrade .....	77
8.6.1	Automatic software upgrade .....	77
8.6.2	Over The Air Software Update .....	79
8.6.2.1	Recommendations for SSU operation .....	79
9	Smart cards and Security .....	81
9.1	Smart Cards .....	81
9.1.1	Conditional Access .....	81
9.1.1.1	Embedded CA(s) .....	81
9.1.1.2	Common Interface .....	81
9.1.1.2.1	Physical presentation of the smart card to the reader .....	81
9.1.1.2.2	Clv1 host requirements .....	82
9.1.1.2.3	CI+ host requirements .....	83
9.1.2	Non-CA Services .....	83
9.2	MHP Security .....	84
9.2.1	MHP Security Framework Issues .....	84
10	Accessories and Setup .....	85
10.1	Receiver Accessories .....	85
10.2	Power Supply / Voltage .....	85
11	Default settings .....	87
A.	Home Channel concept and Tivusat implementation .....	91
A.1	Introduction .....	91
A.2	Home Channel(s) coordinates .....	91
A.3	Tuning info .....	91
A.4	Service info .....	92
A.5	Timing info .....	92
A.6	Maintenance info .....	92
B.	Remote control .....	93

B.1	The need for specifications.....	93
B.2	Keys and Key Events .....	93
B.2.1	The MHP minimum specification .....	93
B.2.2	E-Book ver. 1 .....	94
B.2.3	DTG UK .....	95
B.2.4	The CEI Specification .....	95
B.2.5	The NorDig Unified Specification.....	96
B.2.5.1	The Remote Control and Remote Keyboard.....	96
B.3	Summary of proposals for Undo/Exit keys.....	97
B.4	Easy TV .....	97
B.4.1	Easy-TV: a research by the ITC, Methodology.....	97
B.4.2	Easy-TV: Most common issues with the remote control.....	98
C.	Additional optional feature for mobile interaction channel .....	99
D.	GPRS Interaction Channel: Local Configuration procedures .....	101
D.1	Basic conditions to fulfil .....	101
D.2	The configuration data.....	101
D.3	Configuration Procedures.....	101
D.4	Configuration by menu .....	102
D.5	OTA Assisted configuration .....	103
D.6	OTA Configuration Flow .....	104
D.7	MHP Automatic Configuration .....	105
D.8	MHP Configuration Flow.....	106
E.	Text entry sample class.....	107
F.	EIT schedule compression.....	109
F.1	Introduction.....	109
F.2	Compression algorithm.....	109
G.	Clv1 common interoperability issues .....	111
G.1	Purpose .....	111
G.2	Initialisation.....	111
G.2.1	Problem description .....	111
G.2.2	Specification .....	111
G.2.3	Resolution.....	111
G.3	Mandatory resources.....	111
G.3.1	Problem description .....	111
G.3.2	Specification .....	111
G.3.3	Resolution.....	112
G.4	CA_PMT in clear .....	112
G.4.1	Problem description .....	112
G.4.2	Specification .....	112
G.4.3	Resolution.....	112
G.5	CA_PMT program number casting .....	112
G.5.1	Problem description .....	112
G.5.2	Specification .....	112
G.5.3	Resolution.....	112
G.6	CA_PMT clear to scrambled / scrambled to clear .....	112
G.6.1	Problem description .....	112
G.6.2	Specification .....	112
G.6.3	Resolution.....	113
G.7	PMT update and new CA_PMT .....	113
G.7.1	Problem description .....	113
G.7.2	Specification .....	113
G.7.3	Resolution.....	113
G.8	Spontaneous MMI .....	113
G.8.1	Problem description .....	113
G.8.2	Specification .....	114

- G.8.3 Resolution ..... 114
- G.9 Transport Stream to CAM..... 114
  - G.9.1 Problem description ..... 114
  - G.9.2 Specification ..... 114
  - G.9.3 Resolution..... 114
- G.10 Profile reply..... 114
  - G.10.1 Problem description ..... 114
  - G.10.2 Specification ..... 114
  - G.10.3 Resolution..... 115
- G.11 Remote control / MMI\_Enq()..... 115
  - G.11.1 Problem description ..... 115
  - G.11.2 Specification ..... 115
  - G.11.3 Resolution..... 116
- G.12 Remote control / MMI\_answ()..... 116
  - G.12.1 Problem description ..... 116
  - G.12.2 Specification ..... 116
  - G.12.3 Resolution..... 116
- G.13 Remote control / MMI\_Menu answ()..... 116
  - G.13.1 Problem description ..... 116
  - G.13.2 Specification ..... 116
  - G.13.3 Resolution..... 116
- G.14 MMI Module Name ..... 116
  - G.14.1 Problem description ..... 116
  - G.14.2 Specification ..... 116
  - G.14.3 Resolution..... 117
- G.15 MMI – Text length..... 117
  - G.15.1 Problem description ..... 117
  - G.15.2 Specification ..... 117
  - G.15.3 Resolution..... 117
- G.16 MMI – Menu or list object ..... 117
  - G.16.1 Problem description ..... 117
  - G.16.2 Specification ..... 117
  - G.16.3 Resolution..... 118
- H. MHP CA API Implementation Guidelines for non CA smart cards ..... 119
  - H.1 Purpose ..... 119
  - H.2 Package it.dtt.ca ..... 119
    - H.2.1 CaManager ..... 119
      - H.2.1.1 Constructor ..... 119
      - H.2.1.2 getCAProvider..... 119
      - H.2.1.3 getClient..... 119
      - H.2.1.4 getSlots..... 119
    - H.2.2 CaManagerFactory ..... 119
      - H.2.2.1 closeSession..... 120
      - H.2.2.2 getInstance ..... 120
      - H.2.2.3 openSession ..... 120
    - H.2.3 CaObject..... 120
      - H.2.3.1 Constructors ..... 120
      - H.2.3.2 Methods ..... 120
    - H.2.4 CaSession ..... 120
      - H.2.4.1 Constructors ..... 120
      - H.2.4.2 Methods ..... 120
    - H.2.5 Slot..... 120
      - H.2.5.1 Constructors ..... 120
      - H.2.5.2 addSlotListener..... 121
      - H.2.5.3 getSlotID ..... 121

H.2.5.4	getSmartCard.....	121
H.2.5.5	getStatus.....	121
H.2.5.6	removeSlotListener.....	121
H.3	Package it.dtt.ca.event .....	121
H.3.1	CaEvent .....	121
H.3.2	SlotEvent .....	121
H.3.3	SlotListener.....	122
H.3.4	SlotEventReceived .....	122
H.4	Example.....	122
I.	The new SATSA target .....	125
I.1	Introduction.....	125
I.2	Proposed solution.....	125
I.3	Solution advantages.....	125
I.4	An example.....	125
J.	Requirements and recommendations for combo satellite/terrestrial receivers .....	127
J.1	Service lists .....	127
J.1.1	Separate service lists.....	127
J.1.2	Seamless service lists .....	127

## Tables

Table 1: Mandatory features table.....	28
Table 2: Recommended features table .....	29
Table 3: Wireline interaction channel features .....	31
Table 4: Container/media compatibility matrix .....	31
Table 5: File extensions and MIME types for the various container formats.....	31
Table 6: Interaction channels values.....	32
Table 7: Memory capacity requirements .....	33
Table 8: Mandatory connectors table .....	34
Table 9: Optional connectors table.....	36
Table 10: Audio channel mapping.....	37
Table 11: The Numeric Pad .....	42
Table 12: The Interactive Pad .....	42
Table 13: The Navigation Pad.....	43
Table 14: The TV Pad .....	44
Table 15: Other keys .....	44
Table 16 : Standard Character subset .....	47
Table 17: Special Character Subset.....	47
Table 18: Text Entry Rules.....	48
Table 19: Symbols notation as per E-Book .....	52
Table 20: Program descriptors (PMT).....	52
Table 21: Elementary stream descriptors (PMT).....	52
Table 22: Network descriptors (NIT first loop).....	53
Table 23: Transport stream descriptors (NIT second loop).....	53
Table 24: Network descriptors (BAT first loop).....	54
Table 25: Transport stream descriptors (BAT second loop).....	54
Table 26: Service descriptors.....	54
Table 27: Event Information Descriptors .....	56
Table 28: List of mandatory tables .....	57
Table 29: Private SI recognised in the E-Book.....	57
Table 30: Syntax of the Logical Channel Descriptor .....	58
Table 31: Logical Channel Number.....	59
Table 32: Syntax of the HD Simulcast Logical Channel Descriptor .....	61
Table 33: Default setting for automatic scan .....	68
Table 34: Text Field Lengths.....	69
Table 35: Default settings for auto software upgrade.....	79
Table 36: Accessories .....	85
Table 37: Default settings summary table .....	88
Table 38: Home Channel(s) parameters .....	91
Table 39: Minimum set of input events (G3) .....	93
Table 40: E-Book v.1.9.....	94
Table 41: CEI Specification; CT 100, Progetto di Guida .....	95
Table 42: The NorDig Unified Specification; B.2.5. ....	96
Table 43: The NorDig IRD Key Events table (par 16,2,5: Mapping of Key Events) .....	97
Table 44: Optional features for mobile interaction channel .....	99
Table 45: Text Entry Sample Class.....	108

# 1 Foreword

Since 2005, the High Definition Television formats, 720p and 1080i, have entered the European satellite TV broadcasting market, with a wide offering of tens of HDTV channels provided by different Pay TV aggregators, as for instance Sky Italy with an offering of many HDTV channels.

The vast majority of TV sets currently off the shelf are characterised by screen displays larger than 26 inches, with progressive scanning, panoramic view geometry (16/9) and compatible with HDTV formats (HD ready).

New media players for Home Video, as BluRay disc, or domestic entertainment appliances, as HDV Cams and videogame consoles, are designed to reproduce high-quality HD contents once connected to an HD screen through a HDMI connection. That makes the user capable of enjoying and appreciating the high definition experience, which represents a valid alternative to the TV programming still largely broadcasted in standard definition (SD).

In perspective, *"today HDTV will be the standard definition of tomorrow"*<sup>1</sup>. Based on this sentence, it is important to define as quicker as possible a migration route from SD to HD, aiming to promote the widespread diffusion of free to air HDTV programming matching the increased quality of large screen displays and TV sets.

Appealing hi-quality content productions, like those necessary for a successful launch of an innovative technology like HDTV, require huge investments. A viable approach towards the complete turnover of SD programmes into HD ones, is represented by simulcasting both of them. SD/HD simulcast<sup>2</sup> is a viable way to enrol a mix of genuine HDTV productions programming with up-scaled SD contents already available on standard TV transmissions. It would allow broadcasters to easily re-use existing contents from their huge archives of movies, fictions, documentary and so on.

Indeed, another viable approach to facilitate the spread of genuine HD contents would be the adoption of the simulcast paradigm over different delivery media. HDTV is a platform independent technology and HD contents can be easily distributed over different digital media and TV networks: Terrestrial, Satellite, Cable, IP and Package Media.

## Market outlook

European CE industry is particularly committed to boost sales of large screen displays. For this purpose they undertook, through their major category association EICTA<sup>3</sup>, the initiative of creating a set of licensed labels, corresponding to a precise set of technical requirements: HD Ready (for TVs) and HDTV (for STBs) and their counterparts in 1080p format.

### Displays or Video Projectors



### Receivers



Production and transmission of HD contents has become a need for a successful competitive positioning of Italy in the worldwide digital television market. Here there is potentially a serious risk of losing relevant market quotes in the promotions of Italian culture, in an industrial context where large European and extra-European entities are rapidly progressing.

<sup>1</sup> Today in Japanese labs Super Hi-vision (SHV), which it is intended to be the Ultra High Definition format for the future, is almost a reality.

<sup>2</sup> Simulcast: the concurrent broadcasting of same TV programming in different formats (analogue and digital, SD and HD)

<sup>3</sup> EICTA: European Industry Consumer Technical Association

### **HDTV in the ASO context**

Free To Air HD services, actually simulcasting of up-scaled SD programmes, have started to be available on Italian DTT in all-digital areas, i.e. those territories where ASO<sup>4</sup> has already taken place (around 30% of population at the end of 2009). During 2010 first genuine HDTV signals will be regularly broadcasted and all-digital areas will extend up to 70% of Italian population.

In this scenario, open satellite platforms like Tivusat could even anticipate the availability of Digital HDTV programmes to those users outside all-digital areas, not yet (or who will never be) reached by regular Digital Terrestrial broadcast services.

#### **«Liaison » with Tivù**

Tivù, a company created by the main Italian terrestrial broadcasters (La7, Mediaset and RAI), aims to provide satellite Free To Air digital television in areas not covered by terrestrial networks under the "Tivusat" brand.

To protect the integrity of content rights, services are scrambled, with end-users being issued a smart card to access the services.

First technical specifications for Tivusat were issued in 2008 for SD STBs as S-Book 1.0, which was derived by DGTVi's D-Book.

HDFI and Tivù have joined their forces to develop this HD-Book SAT, which extends S-Book with HD-specific features (formats, codecs, connectors, signalling).

## **1.1 Compliance notation**

A word on the vocabulary: the use of shall, must, should, may is often baffling for non native English speakers. We have chosen to follow the IETF (Internet Engineering Task Force) which in its RFC 2119 states:

1. **MUST:** This word, or the terms "REQUIRED" or "SHALL", means that the definition is an absolute requirement of the specification.
2. **MUST NOT:** This phrase, or the phrase "SHALL NOT", mean that the definition is an absolute prohibition of the specification.
3. **SHOULD:** This word, or the adjective "RECOMMENDED", means that there may exist valid reasons in particular circumstances to ignore a particular item, but the full implications must be understood and carefully weighed before choosing a different course.
4. **SHOULD NOT:** This phrase, or the phrase "NOT RECOMMENDED" mean that there may exist valid reasons in particular circumstances when the particular behaviour is acceptable or even useful, but the full implications should be understood and the case carefully weighed before implementing any behaviour described with this label.
5. **MAY:** This word, or the adjective "OPTIONAL", means that an item is truly optional. One vendor may choose to include the item because a particular marketplace requires it or because the vendor feels that it enhances the product while another vendor may omit the same item. "

N.B. Throughout this document "MANDATORY" is also often used as a "REQUIRED" synonym.

## **1.2 Acknowledgments**

The persons that have contributed to the S-Book first and then to the HD-Book SAT are so numerous we would shortly run out of space if we tried to thank them individually. The HDFI / Tivù Joint Technical Group can only extend its gratitude to all of them and repeat that without

---

<sup>4</sup> ASO: Analogue Switch-Off



them, this work could not have been completed. Of course, all errors and omissions are the sole responsibility of the editors and of the HD Forum Italia.

Manufacturers, through their constructive remarks and questions have played a major role in helping us to clarify and better many points of the specification. Let them be thanked here.

February 2010

*Page intentionally left blank*

## 2 Document History

Document	Revision	Changes	Date	Editor
S-Book 1.0	3	Version distributed to interested manufacturers	9/12/2008	G. Venuti
HD-Book SAT 1.0	0.4	First version circulated	13/11/2009	G. Venuti
HD-Book SAT 1.0	0.5	<ul style="list-style-type: none"> <li>- New requirement related to application autostart.</li> <li>- Signal level aligned with market reality (-70 -&gt; -65 dBm)</li> <li>- Download CoD OPTIONAL -&gt; RECOMMENDED</li> <li>- 960x540 MHP resolution OPTIONAL</li> <li>- Corrected and clarified EIT schedule obligations in Table 26</li> <li>- EIT schedule compression specified</li> <li>- Download CoD API clarified</li> <li>- Memory requirements in Table 8 clarified</li> <li>- HTTP proxy option added</li> </ul>	3/12/2009	G. Venuti
HD-Book SAT 1.0	0.6	<ul style="list-style-type: none"> <li>- New Sections 1 and 5</li> <li>- USB port requirement added</li> </ul>	19/01/2010	G. Venuti
HD-Book SAT 1.0	1.0	<ul style="list-style-type: none"> <li>- Comments accepted by manufacturers incorporated</li> <li>- Pause/Resume API modified</li> <li>- Editorial polishing</li> </ul>	8/02/2010	G. Venuti

### Credits:

#### S-Book:

**Coordinator:** *A.Sigismondi*  
**Editor:** *G.Venuti*  
**Contributors:** *G.Asti, R.Borroni, G.Burzi, L.De Bartolo, T.Di Stefano, P.Invernizzi, L.Lampugnani Nigri, G.Mangano, A.Mapelli, I.Mattei, B.Papini, C.Tosato*

#### HD-Book SAT:

**Prj. Coordinator:** *M.Pellegrinato*  
**WorkGroup manager:** *G.Ridolfi*  
**WorkPackage leader:** *T.Di Stefano*  
**Editor:** *G.Venuti*  
**Joint HDFI/Tivù Experts Group:** *D.Airola Gnota, G.Alberico, V.Arrigoni, B.Buscema, D.Doldi, M.Fumagalli, D.Gibellino, A.Gioia, O.M.Grasso, F.Grilli, R.Iacoviello, A.Mapelli, A.Marconcin, I.Mattei, V.Mignone, A.Morello, R.Paludo, B.Papini, A.Pegoraro, A.Pettazzi, L.Rocchi, A.Sigismondi, P.Sunna, S.Trigila, M.Visintin*

*Page intentionally left blank*

---

## 3 References

For the purposes of this HD-Book, the following references apply:

- [1] “Easy TV” Research Report, ITC 2003, and PsychNology Journal, 2003, Volume 1, Number 4, 355 – 377, “Helping Viewers Press the Right Buttons: Generating Intuitive Labels for Digital Terrestrial TV remote controls”, Jane Lessiter, Jonathan Freeman, Robert Davis and Andrew Dumbreck
- [2] AGCOM Delibera. n. 216/00/Cons, “Determinazione degli standard dei decodificatori e le norme per la ricezione dei programmi televisivi ad accesso condizionato”
- [3] CEI - Comitato Elettrotecnico Italiano, Comitato Tecnico 100, “Guida alla tecnologia e ai servizi dei ricevitori (Set Top Box e televisori digitali integrati) per la televisione digitale terrestre”, Progetto di Guida, 03/06/2003
- [4] CENELEC EN 500 74 “Domestic and similar electronic equipment interconnection requirements: Peritelevision connector”
- [5] Decreto 25 luglio 1997, n. 307 “Regolamento recante le specifiche tecniche relative al sintonizzatore-decodificatore per ricezione di segnali numerici televisivi, sonori e dati, in chiaro o criptati, via cavo e via satellite, denominato «set top box».”
- [6] DVB BlueBook A016: “Digital Video Broadcasting (DVB); Interfaces for DVB Integrated Receiver Decoder (DVB-IRD)”
- [7] EBU Recommendation R-110-2004 on “Subtitling on Digital TV Services
- [8] ETSI TS 101 154 V1.8.1: Digital Video Broadcasting (DVB); Specification for the use of Video and Audio Coding in Broadcasting Applications based on the MPEG-2 Transport Stream
- [9] ETSI EN 300 468 V1.9.1: “Digital Video Broadcasting (DVB); Specification for Service Information (SI) in DVB systems
- [10] ETSI EN 300 472: Digital Video Broadcasting (DVB); Specification for conveying ITU-R System B Teletext in DVB bitstreams
- [11] ETSI EN 300 706: Enhanced Teletext specification (analogue television)
- [12] ETSI EN 50221: “Common Interface Specification for Conditional Access and other Digital Video Broadcasting Decoder Applications”
- [13] ETSI ES 202 130 V1.1.1 (2003-10): “Human Factors (HF); User Interfaces; Character repertoires, ordering rules and assignments to the 12-key telephone keypad”
- [14] ETSI ETS 300 743: “Digital Video Broadcasting (DVB); Subtitling systems”
- [15] ETSI TR 101 162: “Digital Video Broadcasting (DVB); Allocation of Service Information (SI) codes for DVB systems”
- [16] ETSI TR 101 211: “Digital Video Broadcasting (DVB); Guidelines on implementation and usage of Service Information (SI)”
- [17] ETSI TR 102 308 V1.1.1 (2004-02): “User Group; User interoperability criteria”
- [18] ETSI TS 201 812 V1.1.2: “Digital Video Broadcasting (DVB); Multimedia Home Platform (MHP) Specification 1.0.3”
- [19] ETSI TS 102 006 1 V1.1.1 (2001-12): DVB Data Download Specification; Part 1: Simple Profile
- [20] ETSI TS 102 006 V1.2.1 (2002-10): Specification for System Software Update in DVB Systems
- [21] DVB Blue Book A068 Rev.3: “Digital Video Broadcasting (DVB); Multimedia Home Platform (MHP) Specification 1.1.3”

- [22] IEC 13818-1: "Information technology - Generic coding of moving pictures and associated audio information: systems"
- [23] IEC 61937 Digital audio - Interface for non-linear PCM encoded audio bit streams applying IEC 60958
- [24] ITU-R BT.653-2 Teletext systems
- [25] JSR 177: Security and Trust Services API for J2METM
- [26] NorDig: "NorDig Unified Requirements for profiles Basic TV, Enhanced, Interactive and Internet for Digital Integrated Receiver Decoders and relevant parts of Integrated Digital TV sets", ver 1.0
- [27] Sun Microsystems Inc., "Security and Trust Services API for J2METM Specification", June 1, 2004
- [28] DTG Implementation and User Group, "Digital Receiver Implementation Guidelines and Recommended Receiver Reaction to Aspect Ratio Signalling in Digital Video Broadcasting", Issue 1.2.1, Feb. 2001
- [29] DGTVi D-Book, "Compatible DTTV receivers for the Italian market, September 2004
- [30] CI+ Forum, CI+ Specification. Content Security Extensions to the Common Interface
- [31] HDMI Licensing, LLC, "High-Definition Multimedia Interface", rev.1.3
- [32] Intel, "High-Bandwidth Digital Content Protection System", rev 1.3
- [33] ETSI TS 102 757: "Digital Video Broadcasting (DVB); Content Purchasing API
- [34] C.Poynton, "Digital Video and HDTV. Algorithms and Interfaces", Morgan Kaufmann Publishers
- [35] ETSI EN 300 421 V1.1.2 (1997-08): Framing structure, channel coding and modulation for 11/12 GHz satellite services
- [36] ETSI EN 302 307 V1.1.2 (2006-06): Second generation framing structure, channel coding and modulation systems for Broadcasting, Interactive Services, News Gathering and other broadband satellite applications
- [37] Eutelsat: "Digital Satellite Equipment Control (DiSEqC)", rev. 2.0
- [38] EICTA, Baseline Digital Terrestrial TV Receiver Specification, Draft version 1.9 (Nov. 2, 2003) ("E-Book v.2")
- [39] HDFI/DGTVi HD-Book DTT, "Compatible High Definition receivers for the Italian market, ver 1.0, Oct 2008
- [40] ISO/IEC 14496-14: "Coding of audio-visual objects -- Part 14: MP4 file format"
- [41] Open IPTV Forum Release 1 specification, "Volume 2: Media Formats"  
<[http://www.openiptvforum.org/docs/Release1/OIPF-R1\\_SPEC\\_Volume\\_2\\_V1\\_0.pdf](http://www.openiptvforum.org/docs/Release1/OIPF-R1_SPEC_Volume_2_V1_0.pdf)>
- [42] IETF, RFC 2616, "Hypertext Transfer Protocol – HTTP/1.1", <<http://www.rfc-editor.org/rfc/rfc2616.txt>>
- [43] Open IPTV Forum Release 1 specification, "Volume 4: Protocols"  
<[http://www.openiptvforum.org/docs/Release1/OIPF-R1\\_SPEC\\_Volume\\_4\\_V1\\_0.pdf](http://www.openiptvforum.org/docs/Release1/OIPF-R1_SPEC_Volume_4_V1_0.pdf)>
- [44] Open IPTV Forum Release 1 specification, "Volume 6: Procedural Application Environment"  
<[http://www.openiptvforum.org/docs/Release1/OIPF-R1\\_SPEC\\_Volume\\_6\\_V1\\_0.pdf](http://www.openiptvforum.org/docs/Release1/OIPF-R1_SPEC_Volume_6_V1_0.pdf)>
- [45] IETF, RFC 1950, "ZLIB Compressed Data Format Specification version 3.3", <<http://www.rfc-editor.org/rfc/rfc1950.txt>>
- [46] IETF, RFC 1951, "DEFLATE Compressed Data Format Specification version 1.3", <<http://www.rfc-editor.org/rfc/rfc1951.txt>>

[47] DGTVi Broadband Addendum, “Compatible High Definition receivers for the Italian market: special requirements for broadband media delivery”, October 2009

[48] USB Implementers Forum, Inc. “Universal Serial Bus Specification Revision 2.0”, April 2000

*Page intentionally left blank*



## 4 Definitions and abbreviations

### 4.1 Definitions

**Application Service Provider:** an entity that manages and distributes applications and services for interactive television to customers (i.e. broadcasters and consumers) from a central data center. This entity may also provide interaction channel processing services.

**Bound Application:** A MHP application that is linked to another service and that is meant to be accessed only after tuning in to the other service.

**Cross carriage:** Carrying the data (typically EIT data) pertaining to one multiplex on a different multiplex. Cross carriage agreements usually imply reciprocity.

**Domain of an Application:** The domain of an Xlet characterizes the "space" within which the Xlet is able to execute. This includes both the "connection" where the Xlet is delivered and other "connections" where an already executing Xlet is allowed to continue executing. An application cannot run outside its domain. The maximum lifetime of an application extends from the moment the user navigates to its domain until the moment that the user navigates away from its domain. In the broadcast case a "connection" corresponds to a DVB-service. Broadcast signalling indicates which services can load an application and which services allow an already active application to continue.

**Independent Application:** A MHP service which is meant to be directly accessed by the end user (e.g. through a Channel number). An Independent Application may have bound applications linked to it. EPGs are an example of independent application. Also called Non Bound Application

**Interaction Channel:** a bi-directional link connecting the Receiver to a Server for providing extra functionality, such as personalized data, billing, e-commerce, etc. Often called return channel.

**Locator:** The unique identifier of a DVB service/event.

**Out of Box Experience:** the first contact of the user with the product, as experienced when taking it out of the packaging box and plugging it into the wall socket, antenna cable and broadband plug (without having to read tons of manuals...).

**Receiver:** a piece of equipment designed to receive (and decode) digital TV signals. It can be provided as a separate box – in this case it is often called Set Top Box, and sometimes Integrated Receiver Decoder (IRD) – or can be incorporated into a TV set, which is then called an Integrated Digital TV set (iDTV).

**Service:** For TV and Radio, a sequence of programmes under the control of a broadcaster which can be broadcast as part of a schedule [9]. For Applications and Data, refers to a data stream in the MHP that can be used directly or be presented to an output interface, without having to tune into a TV or Radio service.

**Service List:** List of all autonomously accessible services (television, radio, application, and data) identified through a service number

**T-Government Services:** services of e-government provided on digital television receivers. Those services in many cases require the use of an interaction channel, and of a smart card ("citizen's card", e-ID card, etc.)

**TV Viewing Mode or Viewing Mode:** normal TV viewing condition, when less than 5% of the screen area is covered by any MHP, or receiver proprietary, GUI.

### 4.2 Abbreviations

AAC	Advanced Audio Coding
AC-3	Audio Coding 3
ADSL	Asymmetric Digital Subscriber Line
AGCOM	Autorità per le Garanzie nelle Comunicazioni

AIT	Application Information Table
API	Application Programming Interface
AVC	Advanced Video Coding
CEN	Comité Européen de Normalisation
CHAP	Challenge Handshake Authentication Protocol
CI	DVB Common Interface
CoD	Content on Demand
DAE	Declarative Application Environment
DHCP	Dynamic Host Configuration Protocol
DTS	Digital Theater Systems
DTV	Digital Television
DVB	Digital Video Broadcasting
EACEM	European Association of Consumer Electronics Manufacturer
EDID	Extended Display Identification Data
EICTA	European Information and Communication Technology Association
ETSI	European Telecommunications Standards Institute
FTTH	Fiber To The Home
GPRS	General Packet Radio System
GUI	Graphic User Interface
HD	High Definition
HDCP	High bandwidth Digital Copy Protection
HDFI	HD Forum Italia
HDMI	High Definition Multimedia Interface
HDSPA	High-Speed Downlink Packet Access
HDTV	High Definition TV
HE-AAC	High Efficiency AAC
HTTP	Hyper-Text Transfer Protocol
iDTV	Integrated Digital TV Set
IP	Internet Protocol
IPTV	IP Television
ISO	International Organization for Standardization
ISP	Internet Service Provider
i-TV	Interactive Television
JMF	Java Media Framework
MHP	Multimedia Home Platform
MIME	Multipurpose Internet Mail Extensions
MPEG	Moving Picture Experts Group
OIPF	Open IPTV Forum
OMA	Open Mobile Alliance
OTA	Over The Air
OTT-TV	Over The Top TV
PAE	Procedural Application Environment
PAP	PPP Authentication Protocol
PDC	Program Delivery Control
POP	Point Of Presence
PPP	Point-to-Point Protocol
PPPoE	PPP over Ethernet
PSTN	Public Switched Telephone Network
SD	Standard Definition
SIM	Security Identity Module
STB	Set Top Box
TS	Transport Stream
URL	Uniform Resource Locator
USB	Universal Serial Bus
WSS	Wide-Screen Signalling

---

## 5 The HD-Book SAT

HD Forum Italia (HDFI) is an association constituted on September 19<sup>th</sup>, 2006, to represent the general interests of the industry and consumers towards high definition. HDFI is aimed to promote, support, illustrate and disseminate the utilization of multimedia contents and audiovisual programmes, productions and technology in high definition format (HD).

The HDFI association members represent the major institution & companies in the audiovisual & telecommunication Industry in Italy. They cover most of the segment of the entire production chain, from the content creations to end users: ADB, Aethra, Euroscena, Eutelsat, Fastweb, Fondazione Ugo Bordoni, Fracarro, Frame, IDS Multimedia, Mediaset, RAI, SBP, Sky Italia, Sony, STMicroelectronics, Telsey, Telecom Italia Telecom Italia Media. HDFI adhere, as Italian member organization, to European HD Forum (EHDF), promoted and jointly chaired by the international organizations EBU (European Broadcasting Union) and DIF (Digital Interoperability Forum), consequently to the strong stimulus impressed by the European Conference on HDTV held on June 7<sup>th</sup>, 2005 in Luxembourg, organized by the former EU Luxembourg Presidency under the European Community patronage.

Tivù is a company created by the principal Italian Broadcasters: RAI, Mediaset, and Telecom Italia Media. Tivù has established a satellite platform, i.e. a collection of services sharing the same conditional access system and Electronic Programme Guide, named "Tivusat".

This document describes the **baseline requirements** that are needed for a HDTV satellite receiver, either stand-alone (STB) or integrated within a TV set (iDTV), to claim compatibility with High Definition (HD) services offered by an open satellite platform like Tivusat, while maintaining compatibility with Standard Definition (SD) services offered by the same platform.

In other words, this document can be conveniently used as receivers' specification by other satellite platform providers than Tivusat, which is not the sole owner but just the first adopter of HD-Book SAT.

Special attention has been paid to the needs of impaired people through some ancillary requirements specifically devoted to them. The following symbols are used by European broadcasters to mark transmissions offering audio description or video subtitling services.



Some optional features are also described that allow compatibility with the innovative services being introduced on the digital TV networks.

### 5.1 Terminology and notation

The features are divided into two main categories: "*mandatory*" and "*optional*".

When a feature is "MANDATORY", its inclusion is mandatory and it must conform to the defined specification.

When a feature is "OPTIONAL", its inclusion is left at the choice of the manufacturer, but whenever implemented, it shall be implemented in conformance with the specification.

Within the optional category, the document presents some features, which would be of a great advantage to the user, as "RECOMMENDED".

Features or requirements which apply only to either STBs or iDTVs are clearly highlighted both in the text and in visual form, namely:

- Refers to a feature or a section applicable only to iDTVs (yellow marker) ■
- Refers to a feature or a section applicable only to STBs (light blue marker) ■
- Refers to an HD-specific feature* (italic)

The different TV formats are represented in the document according to the following notation [34]:

*<active lines> <scanning> <frames/s>*

For instance:

*576i25 (aka 576@50i) represents the 720x576 interlaced format in 50Hz systems  
720p50 (aka 720@50p) represents the 1280x720 progressive format in 50Hz systems  
1080i25 (aka 1080@50i) represents the 1920x1080 interlaced format in 50Hz systems*

## 5.2 Broadband Features

*This HD Book SAT fully includes the so-called “Broadband Addendum” [47] specification, which was issued by DGTVi as a separate document on October 2009 mainly based on Open IPTV Forum R1 specification [41] [43] [44].*

*The aim of the Broadband Addendum was to complement HD Book DTT 1.0 specification in the area of media delivery, mostly on-demand but not necessarily restricted to, over broadband lines. In fact whilst usage of MHP interaction channel of the broadband port herein required had been fully specified, no clear provision had been made for accessing media contents over broadband (IP) lines.*

*In the scope of this document “broadband (IP) lines” are best-effort internet connections offered by ISP. In other words, the services enabled by the specification included don’t strictly require a connection to the (managed) network of an IPTV Service Provider.*

*In line with the general HD-Book approach, only minimum requirements for interoperability are addressed by the “Broadband Addendum”. Further possible requirements and extensions, for instance in the area of broadband content and service protection or of adaptive streaming, are left up to interested operators and manufacturers.*

*Although the compatible receiver herein specified is provided with 2 different interoperable but independent front-ends, (broadcast SAT tuner and broadband IP port), both capable of supporting media Contents Delivery Services, the adjective “Hybrid” does not apply to this document. In fact core Broadcast-centric services, essentially treated in this HD-Book, are considered as prevalent with respect to other ancillary delivery services (OTT-TV CoD or NTS<sup>5</sup>) made available by broadband lines connectivity defined in this specification.*

### 5.2.1 Broadband Addendum mapping

*The sections which constituted the “Broadband Addendum” document, in the original DGTVi form shape, have been re-mastered to be harmonically merged in the present HD-Book SAT document.*

*For those already familiar with the “Broadband Addendum” document:*

<sup>5</sup> OTT-TV Over the Top TV; CoD Content on demand; NTS: Network Time Shift

- Section 5, introducing the service profiles of interest, has been merged into §6.1.2
- Section 6, dealing with the various (standard) media formats possibly delivered over broadband, has been merged into §6.1.2.1
- Section 7, outlining the (standard) ways 2 or more single medium contents can be grouped together to form a multimedia content available for broadband access, has been merged into §6.1.2.1
- Section 8, dealing with protocols for streaming or downloading multimedia contents over broadband (IP) connections, has been merged into §6.1.2.1
- Section 9, outlining the Application Environment (AE) through which user interfaces are built and applications access the capabilities introduced above, has been merged as a new section §8.4
- Section 10, introducing new features related to accessing media contents over broadband (IP) lines the resident navigator should make available to end user, has been merged as a new section §8.5

### **5.2.2 Broadband Connectivity Programme: Easy-net**

In order to promote the widespread diffusion of emerging Over the Top TV services towards all the Customers equipped with HD-Book compatible receivers, manufacturers are warmly invited to join HDFI “Easy-net” Programme.

“Easy-net” Programme is a promotional campaign launched by HDFI, aimed at producing implementation guidelines to facilitate end users with the connection between the receiver port and the domestic broadband line plug.

Although the Ethernet cable would be by far the most affordable, cheap and simple method for connecting the HD receiver port to the broadband line plug, in a number of cases it would call for wiring not viable in most domestic environments.

Promoting a particular home networking is outside the scope of “Easy-net” Programme. Both wired (e.g. Powerline) or wireless (e.g. WLAN) technologies could be conveniently used by manufacturers. It rather intends suggesting guidelines to make the domestic installation between receiver port and domestic broadband lines plug really easy and functional. Through simple and plug&play connectivity solutions, the user will be able to enjoy the best seamless broadcast / broadband experience.

**Manufacturers are warmly invited to join and promote “Easy-net” Programme, including all the necessary tools and information in their commercial packaging to offer to the Customer a real Out of Box Experience making the full connectivity really quick & easy.**

For further information go to: <http://www.hdforumitalia.org/EasynetProgramme>

## **5.3 Linkage with other organizations**

Where available and compatible with the Italian situation, the specification contained in this document refer to standards developed by standards setting organisations (DVB; ETSI; EICTA; NorDig, MPEG; ISO; CEI, CEN).

## **5.4 Graceful Degradation**

A receiver compliant with this specification SHALL implement a “graceful degradation” mechanism for specific unsupported (optional) features and SHALL behave as follows:

- the receiver SHALL not unexpectedly terminate the current runtime application
- the receiver SHALL not hang up
- the user SHALL be unaware of any exception thrown by the middleware (for applications conforming to the MHP specification), but SHALL be informed of the unavailability of the requested service or functionality on the receiver.

*Page intentionally left blank*

## 6 Basic requirements

### 6.1 Hardware requirements for the receiver

Receivers must meet minimum performance criteria to maximise both network coverage and the reliability of receivers acquired by consumers in the retail market.

#### 6.1.1 Satellite Front End & Signal Decoding

The receiver SHALL support the following signal characteristics on the satellite side:

##### 6.1.1.1 Mandatory features

Feature	Specification	Comment
<b>DVB-S</b>		
Digital demodulation	QPSK	[35]
LNB	Power: Vertical: +13V, Horizontal: +18V 22Khz Tone DiSEqC: Version 1.0 and 1.2 are mandatory; 2.0 optional	[37] DiSEqC Version 1.2 is required for controlling motorized antennas.
Symbol Rate	2 to 45 MSymbols/s	[26]
FEC mode	1/2, 2/3, 3/4, 5/6, 7/8	[35]
Maximum Signal Level	-25 dBm to -65 dBm	[26]
Frequency Range	10.7 to 12.75 GHz	[26]
Change of code rate	Code rate changes SHALL be automatically detected	Network(s) evolution shouldn't impact existing services
Demultiplexing	MPEG-2 System Transport Stream	Ref.: [8]
<b>DVB-S2</b>		
Digital demodulation	QPSK, 8PSK	[36]
LNB	Power: Vertical +13V, Horizontal +18V 22kHz Tone DiSEqC Version 1.0, 1.2, 2.0	[37]
Symbol rate	2 to 45 Msymb/s	[26]
FEC mode	1/2 (only for QPSK), 3/5 (only for QPSK and 8PSK), 2/3 (only for QPSK, 8PSK), 3/4, 4/5, 5/6, 8/9, 9/10	[36]
Maximum Signal Level	-25 dBm to -65 dBm	[26]
Frequency Range	10.7 to 12.75 GHz	[26]

Feature	Specification	Comment
Roll off	0.20, 0.25, 0.35	[36]
Pilot aided demodulation	Yes	[36]
Demultiplexing	MPEG-2 System Transport Stream	[8] Support of multiple TS [36] is RECOMMENDED.
<b>A/V Decoding</b>		
Video Decoder (SD mode)	MPEG-2 Video Main Profile @ Main Level and H.264/AVC High Profile @ Level 3 (576i25) SHALL be supported.  Video Aspect Ratio: 4:3; 16:9.	The support of a picture aspect-ratio conversion function to transform programmes broadcast in the format 16:9 to 4:3 (and vice-versa) is mandatory. The receiver SHALL follow indications given by the Active Format Descriptor, if present (see section 7.5.3) Ref. : [8], [2]
Audio Decoder (SD and HD modes)	The following standards SHALL be supported: <ul style="list-style-type: none"> <li>- MPEG-1 Audio Layer I &amp; II</li> <li>- HE-AACv1 up to level 2 for stereo and level 4 for multichannel (5.1)</li> <li>- AC-3 (aka Dolby Digital)</li> <li>- Enhanced AC-3 (aka Dolby Digital Plus) up to 5.1 channels</li> </ul> Receivers are required to support audio description in the following formats as per [9]: <ul style="list-style-type: none"> <li>- MPEG-1 L2 broadcaster mix</li> <li>- MPEG-1 L2 receiver mix</li> <li>- HE-AACv1 and Enhanced AC3 receiver mix</li> </ul> Receivers may support other modes of audio description. Receiver may support "clean-audio" in broadcaster-mix format.	Ref.: [8] Full decoding of stereo transmissions is mandatory for any of the standards listed aside.  PCM Stereo downmix of 5.1 HE-AACv1, AC-3 or Enhanced AC-3 transmissions is mandatory. Presentation of the downmixed analog signal on SCART and RCA outputs (if present) is mandatory.  Transcoding of 5:1 HE-AACv1 transmissions to AC-3 or DTS and of Enhanced AC-3 transmissions to 5:1 AC-3 signal is mandatory unless the receiver provides a minimum 5 channel audio reproduction system capable of driving at least 5 speakers. Presentation of the transcoded or native AC-3 signal on SPDIF output (if present) is mandatory.
Video Decoder (HD mode)	H.264/AVC High Profile @ Level 4 (1080i25) support is mandatory <sup>6</sup> .  H.264/AVC High Profile @ Level 3.1 (720p25) support is mandatory <sup>7</sup> .  H.264/AVC High Profile @ Level 3.2 (720p50) support is mandatory.	Ref.: [8]
Audio Multi-Language	Language SHALL be selectable.	Behaviour as specified in [7.5.1.1 Audio Language]

Table 1: Mandatory features table

<sup>6</sup> H.264/AVC High Profile @ Level 4.2 (1080p50) support will be considered in next releases of the HD-Book SAT

<sup>7</sup> This profile includes also supporting 576p50 (Enhanced Definition TV), a format which broadcasters can consider for new H.264/AVC SD services.



### 6.1.1.2 Recommended features

Feature	Recommended value	Comment
Graphic processing	16-bit colour palette	The minimum envisaged in the MHP specification (8 bit: MHP palette giving 188 colours) is not sufficient for evolving graphical applications (e.g. photos).
Video sizing	Arbitrary resizing	In case of discrete resizing, the receiver SHALL select and use the value nearest to the requested value

Table 2: Recommended features table

### 6.1.2 Interaction Channel

Support to interactive TV, with specific reference to true interactive services, including media delivery over broadband (IP) connections, is deemed of paramount importance for HD receivers. Therefore

- Both STB and iDTV receivers SHALL have at least one wireline interaction channel

Two families of interaction channel implementations are in fact considered<sup>8</sup>:

- wireline interaction channel
- mobile interaction channel.

It is up to the manufacturer to implement, as an option, a mobile interaction channel in addition to the wireline default one.

In the scope of this document “broadband (IP) connections” are best-effort Internet connections offered by ISPs. In other words, the services enabled by this addendum don’t strictly require a connection to the (managed) network of an IPTV Service Provider.

In line with the rest of this document, also for media delivery over broadband (IP) connections only minimum requirements for interoperability are addressed in the following, mostly based on Open IPTV Forum R1 specifications. Further possible requirements and extensions, for instance in the area of broadband content and service protection or of adaptive streaming, are left up to interested operators and manufacturers, unless/until relevant standards may emerge.

For delivering media contents over broadband (IP) lines, the scope of this document is restricted to Content on Demand (CoD) type of services.

Content on Demand (CoD) service is a service where a user can select the individual content items they want to watch from the list of available content. Consumption of the content is started upon user request.

2 types of CoD services are addressed in the following:

- Streamed CoD services, where content is consumed while the content itself is being delivered (real-time streaming)
- Download CoD services, where the whole content has to be downloaded first to the local storage in the receiver before consuming it. Consumption is then independent of the delivery.

<sup>8</sup> this classification refers to the technology used to access the public network: so for instance a receiver connected via a Wireless LAN to an ADSL modem/router fits into the wireline interaction channel family

Support of Streamed CoD services is **MANDATORY**.

Support of Download CoD services is **RECOMMENDED** in receivers with internal or external storage capabilities.

### 6.1.2.1 Wireline interaction channel

A wired or wireless (IEEE 802.11 b/g/n) Ethernet port for connecting to broadband access services (e.g. ADSL, FTTH) through a residential gateway (e.g. ADSL modem, ADSL modem/router, FTTH termination) would offer the user the full potential of interactivity, through always-on and broadband capabilities.

From the application viewpoint, Ethernet connections can be seen either as LAN (connectionless) or virtual dial-up connections. The former is mandatory, whereas the latter, which requires support for PPPoE by the receiver, is **OPTIONAL**.

Feature	Specification	Comment
Ethernet	IEEE 802.3 10/100 Mbit/s autosense	
IP address	Obtained either: <ul style="list-style-type: none"> <li>via DHCP or</li> <li>manually</li> </ul>	DCHP SHALL be the factory default. For manual configuration it SHALL be possible to insert a static address from the resident menu,
Optional Supplementary Protocol	PPPoE	For virtual dial up. The resident menu SHALL allow to introduce username and password
HTTP Proxy	A resident menu for defining an HTTP proxy server is <b>RECOMMENDED</b> .	
Media formats	All audio and video formats specified for broadcast in Table 1 SHALL be supported plus: <ul style="list-style-type: none"> <li>H.264/AVC Baseline Profile @ Level 2</li> <li>MPEG-1 Audio Layer III</li> <li>AAC up to level 2 for stereo and level 4 for multichannel (5.1)</li> <li>Teletext</li> <li>DVB Subtitles</li> <li>MHP</li> </ul>	Some restrictions on the media types allowed within some specific container may apply (see below)  Maximum bit rate of video delivered over broadband (IP) lines that the receiver SHALL be able to correctly decode and present for Streamed CoD services is 8 Mbit/s.
Media container <sup>9</sup>	For delivery of media contents over broadband (IP) lines the following standard container formats SHALL be supported: <ul style="list-style-type: none"> <li>MPEG-2 Transport Stream (TS)</li> <li>MPEG-4 File Format (MP4) [40]</li> </ul>	Further to the constraints specified in [8], those specified for "TS system layer format" in clause 4.1 of OIPF Media Formats specification [41] apply. In particular, only a single program SHALL be contained in the Transport Stream container. The TS SHALL contain only one Program Map Table (PMT).  For the MP4 container the constraints specified in clause 4.2 of OIPF Media Formats specification [41] apply.

<sup>9</sup> "Container" is what in MPEG jargon is called "system layer", i.e. a means for multiplexing and synchronizing multiple media streams with associated system information (metadata).

Feature	Specification	Comment
Protocols for streaming	Unicast streaming using HTTP 1.1 [42] SHALL be supported as defined in clause 5.2.2.2 of the OIPF Protocols specification [43]. In order to reduce unnecessary network usage, by allowing partial retrieval for use in cases such as trick play or seek operations, the Range HTTP header in a GET request form SHALL be supported.	To optimize the streaming user experience over best-effort broadband lines, the receiver SHALL implement proper buffering and playback strategies to cope with varying network conditions. The details of such strategies are implementation dependant.
Protocols for download	If content download is supported, HTTP SHALL be supported as defined in clause 5.2.3 of the OIPF Protocols specification [43].	

Table 3: Wireline interaction channel features

The media formats supported within each container type are listed in the following table:

Media Format		Container	
		MPEG-2 TS	MP4
Video	H.264/AVC High Profile @ Level 4.2 (1080p50), if supported	X	X
	H.264/AVC High Profile @ Level 4 (1080i25)	X	X
	H.264/AVC High Profile @ Level 3.1 (720p25)	X	X
	H.264/AVC High Profile @ Level 3.2 (720p50)	X	X
	MPEG-2 Video Main Profile @ Main Level	X	
	H.264/AVC High Profile @ Level 3 (576i25)	X	X
Audio	H.264/AVC Baseline Profile @ Level 2		X
	MPEG-1 Audio Layer I & II	X	
	HE-AACv1 up to level 2 for stereo and level 4 for multichannel (5.1)	X	X
	AC-3 (aka Dolby Digital)	X	X
	Enhanced AC-3 (aka Dolby Digital Plus) up to 5.1 channels	X	X
	MPEG-1 Audio Layer III		X
Application	AAC up to level 2 for stereo and level 4 for multichannel (5.1)	X	X
	MHP	X	
Teletext	EBU Teletext carried in DVB streams	X	
Subtitles	DVB Subtitles	X	

Table 4: Container/media compatibility matrix

Particular cases of “self-contained” contents which can be delivered over broadband (IP) lines are audio-only streams. The following formats SHALL be supported for such streams:

- MPEG-1 Audio Layer III
- HE-AACv1
- AAC

File extensions and MIME types used for the previously defined container formats are the following:

Format	Extension(s)	MIME Type
MPEG-2 Transport Stream (TS)	.ts, .trp, .mpg	video/mpeg
MPEG-4 File Format (MP4)	.mp4	video/mp4
MPEG-1 Audio Layer III	.mp3	audio/mpeg
HE-AACv1	.m4A	audio/mp4
AAC	.aac	audio/mp4

Table 5: File extensions and MIME types for the various container formats

### 6.1.2.2 Mobile interaction channel

Any advanced packet-switched mobile connections (e.g. GPRS over EDGE, HSDPA, ...) can be used as mobile interaction channel. See Annex C and D as an example of assisted and manual configuration in the GPRS case.

### 6.1.2.3 Presentation of Interaction Channel Type to Applications

The values returned by the `getType()` method of the `org.dvb.net.rc.RCInterface` class in the MHP specification [21] SHALL be as follows:

Interaction Channel Type	Value Returned	Comment
Wireline PSTN Modem interface	TYPE_PSTN (value: 1)	
Wireline Ethernet Interface	TYPE_CATV (value: 4)	For LAN and PPPoE
Mobile Interface	TYPE_OTHER (value: 9)	

Table 6: Interaction channels values

### 6.1.2.4 User Instructions

Each receiver SHALL include instructions that clearly describe all the specific conditions to successfully execute connected interactive applications.

Examples of such instructions are:

- receivers equipped with an Ethernet port
  1. must be connected with a proper cable to a Residential Gateway
  2. the customer must have a valid ISP subscription
  3. specific interactive applications may not support the broadband interaction channel.
  4. for specific applications access agreements might be required between the Application Service Provider and the user's ISP.
- receivers equipped with an internal HSDPA modem
  1. may have to be connected to a high gain antenna
  2. need a valid SIM, inserted in the proper slot, and an active subscription to a HSDPA service
  3. specific interactive application may not support the HSDPA interaction channel (e.g. based on the speed of the interaction channel).
  4. an interconnection agreement must be in place between the interactive Application Service Provider and the mobile ISP and/or mobile operator of the user

### 6.1.3 Memory

The receiver SHALL provide at least the following minimum memory sizes

Feature	Minimum Value	Comment
Flash Memory	8 MByte of PMS (persistent non-volatile memory) dedicated and shared between all the broadcasters	Memory space effectively available, net after an eventual MHP security system. At least 8 Mbyte of PMS SHALL be reserved for MHP 1.1.3 stored applications.

Feature	Minimum Value	Comment
SDRAM Memory	16 MByte not contiguous net (Java heap SDRAM memory), available on request for MHP application use.	Memory has to be freed up to the maximum amount of 16 Mbytes ( <b>RECOMMENDED 24 MByte</b> ) when an MHP application is loaded. This condition is testable by loading into RAM a specific MHP application with a 16/24 MByte footprint.

Table 7: Memory capacity requirements

### 6.1.4 I/O Connectors

#### 6.1.4.1 Mandatory Connectors

The following connectors SHALL be present in any applicable receiver (see comments).

Connector	Specification	Comment
Input RF connector.	IEC 60169-2, F-type, Female, 75 ohm	Tuner input
SCART Connector (Primary)	Peritelevision standard [4] <ul style="list-style-type: none"> <li>• RGB</li> <li>• CVBS: PAL Out</li> <li>• Audio Output</li> </ul> A/V Control Pin 8	For connection to the TV set. Only applicable to STBs As an option, the user menu may offer the possibility to output a Y/C signal instead of the RGB signal. <i>In case of HD signal, the downsampled SD version has to be presented on this output, both in composite and component mode, with the same user settings defined in the menu page for connection to 4:3 or 16:9 TV sets. Teletext reinsertion on VBI is required (see §8.1.2).</i> The stereo output pins will carry one of the following: <ul style="list-style-type: none"> <li>• a mono or stereo signal, in the case of the received audio component being mono or stereo;</li> <li>• a two channel downmixed signal, in the case of the received audio component being multi-channel.</li> </ul>
Output SPDIF Connector	As per [23]: <ul style="list-style-type: none"> <li>• Electrical (RCA connector) or</li> <li>• Optical connector</li> </ul>	This output may be omitted when the receiver provides a minimum 5 channel audio reproduction system capable of driving at least 5 speakers.

Connector	Specification	Comment
Output HDMI Connector with HDCP content protection	Type A (Female) [31] Automatic audio/video sync is required. HDCP [32] must be ON by default. 720p50 is the RECOMMENDED default output format.	For digital connection of STBs to HD Ready TV or HD Ready 1080p sets. According to EICTA HD TV and HD TV 1080p logos' requirements, a "dynamic" output (unscaled) mode SHALL be available where the HD output format (720p50 or 1080i25) will match the HD transmission format (720p50 or 1080i25 respectively) based on EDID. By avoiding possible (even multiple) format conversions, such mode would in theory provide the best video quality. But due to limitations in current HDMI/HDCP implementations it would likely cause some substantial extra delay, with respect to a fixed 720p50 or 1080i25 output setting, when moving between services or events with different HD or SD transmission formats. For these reasons, the dynamic output mode SHALL be available in user menus but not necessarily as the default value.  In order to possibly minimize the number of cascaded conversions, when dynamic output mode is selected SD output towards HD Ready or HD Ready 1080p sets SHALL be set to 576p50.
Input HDMI Connector with HDCP content protection	Type A (Female) [31] E-EDID support, including HDMI VSDB (Vendor-Specific Data Block) Lipsync-related fields, is required. HDCP [32] must be ON by default.	For digital connection of STBs to HD Ready or HD Ready 1080p TV sets.
Ethernet Port	RJ 45 Connector	Mandatory for receivers with wireline interaction channel also in case they provide (in-house) wireless access <sup>10</sup> .
Smart card slot	ISO 7816 1,2,3 with T=0 and T=1	For CA and non-CA applications
Common Interface (CI+)	EN 50 221, as explained in section 9.1.1.2, with extensions by CI+ Forum [30]	Applicable and mandatory only for iDTVs with screen diagonal over 30cm (13").
USB Port (Host)	USB Type A Connector	Compliant with USB 2.0 or later specification [48] For user-managed software upgrade and/or for attaching external storage media

Table 8: Mandatory connectors table

<sup>10</sup> An USB port could actually turn into an Ethernet (wired or wireless) or advanced mobile (GPRS, EDGE, UMTS, HDSPA) port through a suitable adapter but the sole presence of such a port doesn't fulfil the requirement. A receiver with USB port will be considered compliant with this requirement only if the aforementioned adapter would come bundled with the receiver itself.

### 6.1.4.2 Optional Connectors

The following table includes a non exhaustive list of connectors which might be present in some receivers. When present the specifications given therein do apply.

Connector	Specification	Comment
Output HDMI Connector with HDCP content protection	Type A (Female) [31] Automatic audio/video sync is required. HDCP [32] must be ON by default.	For digital connection to other external equipment (e.g. Home Theater, Video Projector).
SCART Connector (Secondary)	<ul style="list-style-type: none"> <li>• CVBS: PAL Out</li> <li>• Audio: Output</li> <li>• Y-C (super VHS)</li> </ul>	<p>Useful to record Digital Channels on a VCR. Such output must not be affected by OSD (On Screen Display) graphics. Applicable only to STBs.</p> <p><i>In case of HD signal, the downsampled SD version has to be presented on this output, either/both in composite or/and component mode (if present), with the same user settings defined in the menu page for connection to 4:3 or 16:9 TV sets. Teletext reinsertion on VBI is RECOMMENDED (see §8.1.2).</i></p> <p><i>The stereo output pins will carry one of the following:</i></p> <ul style="list-style-type: none"> <li>• a mono or stereo signal, in the case of the received audio component being mono or stereo;</li> <li>• a two channel downmixed signal, in the case of the received audio component being multi-channel.</li> </ul>
SCART In Connector (1)	<p>Peritelevision standard [4]</p> <ul style="list-style-type: none"> <li>• RGB In</li> <li>• CVBS: PAL In</li> <li>• Audio In</li> <li>• A/V Control Pin 8</li> </ul>	Applicable only to iDTVs, for connecting legacy SD devices.
SCART Connector (Primary)	<p>Peritelevision standard [4]</p> <ul style="list-style-type: none"> <li>• RGB</li> <li>• CVBS: PAL Out</li> <li>• Audio Output</li> </ul> <p>A/V Control Pin 8</p>	<p>For connection to external legacy SD equipment.</p> <p>As an option, the user menu may offer the possibility to output a Y/C signal instead of the RGB signal.</p> <p><i>In case of HD signal, the downsampled SD version has to be presented on this output, both in composite and component mode, with the same user settings defined in the menu page for connection to 4:3 or 16:9 TV sets. Teletext reinsertion on VBI is required (see §8.1.2).</i></p> <p><i>The stereo output pins will carry one of the following:</i></p> <ul style="list-style-type: none"> <li>• a mono or stereo signal, in the case of the received audio component being mono or stereo;</li> <li>• a two channel downmixed signal, in the case of the received audio component being multi-channel.</li> </ul>

Connector	Specification	Comment
RCA Connectors (Composite)	<ul style="list-style-type: none"> <li>1 Video</li> <li>2 Audio (left/ right)</li> </ul>	<p>In case of HD signal, the composite downsampled SD version has to be presented on the video output, with the same user settings defined in the SCART menu page for connection to 4:3 or 16:9 sets. Teletext reinsertion on VBI is required.</p> <p>The stereo output connector will carry one of the following:</p> <ul style="list-style-type: none"> <li>a mono or stereo signal, in the case of the received audio component being mono or stereo;</li> <li>a two channel downmixed signal, in the case of the received audio component being multi-channel.</li> </ul>
RCA Connectors (Component)	<ul style="list-style-type: none"> <li>3 Video (YPbPr) as per CEA 770.3</li> <li>2 Audio (left/ right)</li> </ul>	<p>In case of HD signal, the composite downsampled SD version has to be presented on the video output, with the same user settings defined in the SCART menu page for connection to 4:3 or 16:9 sets.</p> <p>The stereo output connector will carry one of the following:</p> <ul style="list-style-type: none"> <li>a mono or stereo signal, in the case of the received audio component being mono or stereo;</li> <li>a two channel downmixed signal, in the case of the received audio component being multi-channel.</li> </ul>
SIM slot	Receptacle for standard GSM SIM. Access to the SIM slot SHALL not need opening the case of the receiver.	For receivers with mobile interaction channel. The slot may be either inside the receiver box itself or in an external device (see note 10).
Mobile high gain antenna connector	One of three possible standards <ul style="list-style-type: none"> <li>RP TNC female</li> <li>RP MC Card female</li> <li>RP SMA female</li> </ul>	For receivers with mobile interaction channel.
Serial data port (RS-232) 9-pin	D-sub connector Female	

Table 9: Optional connectors table

### 6.1.4.3 Audio outputs matrix

The following matrix specifies which audio SHALL be presented on which output (if present) of a compliant receiver, based on the received signal, both for broadcast and broadband:

	HDMI	SCART	RCA	SPDIF
Mono/stereo audio (any codec)	Decoded PCM mono/stereo audio	Decoded analog mono/stereo audio	Decoded analog mono/stereo audio	Decoded PCM mono/stereo audio
AC-3 5.1 audio	AC-3 5.1 audio or stereo downmix of multichannel audio, in the given preference order, based on sink's capabilities (as per EDID)	Analog stereo downmix of multichannel audio	Analog stereo downmix of multichannel audio	AC-3 stream



	HDMI	SCART	RCA	SPDIF
<i>Enhanced AC-3 5.1 audio</i>	<i>Enhanced AC-3 5.1 audio or AC-3 5.1 transcoded stream or stereo downmix of multichannel audio, in the given preference order, based on sink's capabilities (as per EDID)</i>	<i>Analog stereo downmix of multichannel audio</i>	<i>Analog stereo downmix of multichannel audio</i>	<i>AC-3 5.1 transcoded stream</i>
<i>HE-AAC v1 5.1 audio</i>	<i>AC-3 or DTS 5.1 transcoded audio or stereo downmix of multichannel audio, in the given preference order, based on sink's capabilities (as per EDID)</i>	<i>Analog stereo downmix of multichannel audio</i>	<i>Analog stereo downmix of multichannel audio</i>	<i>AC-3 or DTS 5.1 transcoded stream</i>

Table 10: Audio channel mapping

## 6.2 Remote Control

### 6.2.1 Introduction

To ensure a common and stable reference for application developers and consumers, it is necessary to specify a certain number of points concerning the remote control. This necessity has been identified and confirmed by different groups (e.g. ETSI STF228 on "User interoperability criteria", see Annex B.1 and ref. [17]).

The points taken into consideration cover aspects of:

- physical layout of the remote
- labelling of the keys
- behaviour on "undo" commands
- interaction of output from the remote with the OSD
- interaction with applications for alpha-numeric input

In all cases where possible, the requirements are based on specifications produced by other bodies (see Annex B).

Lastly this chapter contains some advice on good remote control design, taken from extensive research conducted elsewhere (summarized in Annex 0). It is highly recommended manufacturers follow this advice – for the benefit of the consumer.

Unlike vertically integrated digital platforms it is not possible to mandate a single remote control design. However, it is essential to have a common minimum of remote-control functionality to ensure that all broadcast services – and in particular interactive applications - are available to the viewer as intended by the broadcaster. In addition, any labelling used needs to be consistent, both to allow the inclusion of on-screen instructions in broadcast services and to enable an easy dialogue with any support staff, e.g. call-centres

### 6.2.2 Overview

The mandatory keys and key events available to the application are very limited, and thus keys and key event may vary from manufacturer to manufacturer. Even if all necessary (for

the consumer and the applications) keys are present on the remote, there is no obligation to make the events available to the application (see Annex B.2).

Events necessary to a smooth operation of interactive TV – such as « undo » - are not specified in the MHP standard and have been specified in different ways by different groups (see Annex B.2). They might not be treated in a uniform way by manufacturers and thus create inconsistencies for application providers and their communication with the consumer.

### 6.2.3 Generic functional description of the remote control

The remote control is used for different purposes:

- TV/receiver control
- channel selection
- accessing information about programs and services
- interactivity

It is strongly RECOMMENDED that the keys be grouped together by function, and the groupings SHOULD be clearly separated (see “Easy TV” [1] research summary in Annex B.4).



Figure 1: Typical Remote Control

### 6.2.4 General Recommendations

The following recommendations are based on international studies and on evidence coming out of qualitative research based on DTTV-MHP trials that took in place in Italy.

#### **6.2.4.1 The Main Remote**

Receiver remotes need to make possible controlling all the main functions of the TV Set. It has to replace the analogue remote by keeping the same simplicity and user friendliness (few & large keys are needed).

#### **6.2.4.2 Single hand friendly**

- The remote control needs to stay comfortably in one hand and be balanced in weight. A rubber band can be useful if placed around the border of the remote.
- The remote will stay in one hand and the keys will be pressed with the thumb. All the keys need to stay in "thumb range".

#### **6.2.4.3 Clear structure**

Keys for normal TV viewing and keys for interactivity and navigation need to be grouped in clearly separated sections of the remote

#### **6.2.4.4 Channel selection**

- Speed: channel selection (video-video switch) SHOULD take less than 0,8 seconds both for an inband or an outband switch. For a channel switch implying a change of hierarchical mode, a maximum of 1 second is tolerable for switching. The switching time shall be calculated using the channel up/down button and will not consider the time for validating the channel number to switch to when using the numeric pad for channel selection..
- AV source dedicated key for VCR or DVD (or other receiver)
- Led on the receiver to indicate the reception of signal coming from the remote.

#### **6.2.4.5 TV controls**

STBs whose remote gives the opportunity of directly controlling volume on the TV-set were ranked at the top both in Easy-TV and Italian Broadcasters' research.

#### **6.2.4.6 Now and Next**

Need for a dedicated key for Now-and-Next information and for accessing on screen help for navigating channels and services.

#### **6.2.4.7 Navigation keys**

- Navigation keys need to be near and consistently placed.
- Colour keys need to be placed following on screen layout.
- There has to be one only red key on the remote
- Symbols: use well known metaphors.

#### **6.2.4.8 Dimensions**

Large remote (hand size with large and clearly separated keys).  
Comfortable to handle (rubbery and rounded). Every key has to be pressed with thumb.  
Weight: quite consistent. Light means fragile.

### **6.2.5 The Numeric Pad**

#### **6.2.5.1 Overall Function Description**

The Numeric Pad is used:

- For channel selection
- In MHP, for application specific purposes.
- For various (manufacturer proprietary) purposes within the receiver's menus

## 6.2.5.2 Requirements for the Numeric Pad

### 6.2.5.2.1 Time-out for channel selection

It is RECOMMENDED that the time-out for channel selection/switching through numeric pad SHOULD be less or equal to 1 second for SD video and 2 seconds for HD video<sup>11</sup>. Longer time out length is perceived as misfunctional or annoying by users (see Easy-TV research findings in Annex 0)

### 6.2.5.2.2 Labelling of Numeric Pad keys

The labelling of the numeric pad keys SHALL be as shown in the picture.

This labelling is fully compliant with standard ETSI ES 202 130 v. 1.1.1 (2003-10) [13]. Letter labels can be also printed on the numeric keys, if they are clearly visible.

## 6.2.6 Interactive Pad

### 6.2.6.1 Overall Function Description

The Interactive Pad is used:

- For navigating within any receiver proprietary GUI
- For navigating within any MHP application

### 6.2.6.2 Requirements for Interactive Pad

No receiver proprietary function SHALL be assigned to the interactive pad when outside of a proprietary STB menu or sub-menu and, in general, when in TV viewing mode condition (see definition in §4.1). As a consequence, the arrows SHOULD not be used neither for channel switching (Ch+ / Ch – SHOULD be used instead) nor for volume adjustments. These functions have to be performed by specific dedicated keys.

No key that can bring to a sudden and unexpected killing of an MHP application SHOULD be placed near to the interactive pad keys.



Figure 2: The Interactive Pad

The order of the colour keys SHALL be strictly followed (Red, Green, Yellow, and Blue).

<sup>11</sup> It is acknowledged that meeting such targets will depend also on broadcasted signal (e.g. MPEG GOP size) and HDMI/HDCP switching time (if dynamic output mode has been selected)

## 6.2.7 The Navigation Pad

### 6.2.7.1 Overall Function Description

The Navigation Pad is used:

- For accessing SI tables data (e.g.: EIT present/following, AIT)
- For accessing the overall channel list
- For selecting the alternative audio track (if any)
- For accessing the EPG application (resident or on-air)
- For accessing Subtitles (DVB or Teletext)

Not all the keys shown in the Navigation PAD are mandatory and have to be included on the remote control.

Refer to following section in the Remote Control chapter for more detailed specifications.

### 6.2.7.2 Requirements for Navigation Pad

All the keys in this particular group are receiver proprietary and labels shown in the picture are to be taken as suggestions, but are completely up to the manufacturer for definition. Shape, disposition and order of such keys are up to the manufacturer. It is warmly suggested using keys with a clearly distinct shape for identifying these keys and distinguishing them from Interactive Pad keys.



Figure 3: The Navigation Pad

It is strongly suggested keeping these keys grouped together in order for the user to access them easily.

Availability on remote controls, or at least on custom models, of a dedicated “hot” key for people who are blind and visually impaired to easily access Audio Description possibly associated to certain programs is RECOMMENDED.

## 6.2.8 The TV Pad

### 6.2.8.1 Overall Function Description

The TV Pad is used:

- For accessing to receiver proprietary settings.
- For controlling volume and for channel hopping.
- For selecting alternative video sources (DVD, VHS, Gaming Consoles...).
- To return to TV mode.

Not all the keys shown in the TV Pad are mandatory and have to be included on the remote control.

Refer to following section in the Remote Control chapter for more detailed specifications.

### 6.2.8.2 Requirements for TV Pad

All the keys in this particular group are receiver proprietary and labels shown in the picture are to be taken as suggestions, but are completely up to the manufacturer for definition. Keys for volume adjustments and for channel up/down scrolling SHOULD be easy to identify and clearly separated from the Interactive Pad.

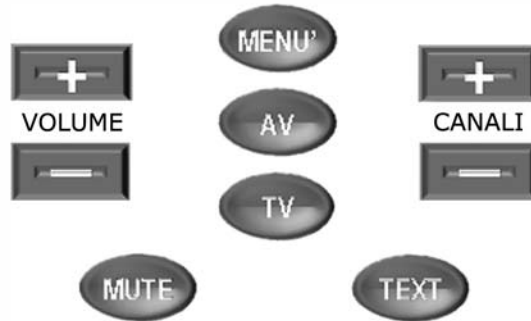


Figure 4: The TV Pad

## 6.3 Remote control keys detailed specifications

### 6.3.1 The Numeric Pad

item	Keys	Status	Function	Additional specs
1	⓪ .. ⑨	Mandatory	MHP standard	The letter text labelling has to be followed

Table 11: The Numeric Pad

### 6.3.2 The Interactive Pad

item	Keys	Status	Function	Additional specs
2		Mandatory	VK_F9 has to be passed to MHP applications	Refer to chapter "Requirements for Undo function".
3		Mandatory	VK_ESC has to be passed to MHP app.	Refer to chapter "Requirements for Undo function".
4		Mandatory	MHP standard – Arrow Up / Down	
5		Mandatory	MHP standard – Arrow Left / Right	
6		Mandatory	MHP standard	
7		Mandatory	MHP standard – Red Key	
8		Mandatory	MHP standard – Green Key	
9		Mandatory	MHP standard – Yellow Key	
10		Mandatory	MHP standard – Blue Key	

Table 12: The Interactive Pad

### 6.3.3 The Navigation Pad












item	Keys	Status	Function	Additional specs
11		Mandatory	This key gives access to the receiver's proprietary present and following SI information.	
12		Mandatory	This key gives access to the embedded Electronic Program Guide (either manufacturer or platform specific).	The labelling has to be decided by the manufacturer.
13		Optional	This receiver's proprietary key gives access to the list of MHP application that is related to current service.	The labelling has to be decided by the manufacturer.
14		Optional	This key gives access to the receiver's service list	Audio/video, audio only and stand alone interactive services (see § 7.2.5.1).
15		Optional	This key allows the viewer to choose among different audio.	On some remote controls it might be used to easily access Audio Description possibly associated to programs.
16		Optional	This key allows the viewer to visualize subtitles.	Shall give access to DVB subtitles. Should also give access to Teletext subtitles when it is sole present

Table 13: The Navigation Pad

### 6.3.4 The TV Pad

Item	Keys	Status	Function	Additional specs
17		Mandatory	Access to receiver's proprietary menu. Labelling is up to the manufacturer.	
18		Mandatory	Increase volume	
19		Mandatory	Decrease volume	
20		Mandatory	Switch channel up of one position according to the channel list	
21		Mandatory	Switch channel down of one position according to the channel list	



Item	Keys	Status	Function	Additional specs
22		Optional	Selection of external video sources such as DVD, VHS, Gaming Consoles	
23		Optional	This key allows the viewer to restore the "initial state" of MHP applications.	Refer to Requirements for the "Undo" function §6.5

Table 14: The TV Pad

### 6.3.5 Other Keys




item	Keys	Status	Function	Additional specs
24		Mandatory	Switch on/off the receiver	This key SHOULD NOT be red.
25		Mandatory	Teletext for iDTVs and for STBs supporting (see also [8.1.2]. MHP standard otherwise.	The labelling "Text" is RECOMMENDED.
26		Optional	Muting the volume	Pressing this key once will mute the volume. By pressing the same key again the volume level will be restored at the previous level

Table 15: Other keys

## 6.4 Interaction between (proprietary) receiver GUI and MHP applications

- In case any proprietary receiver GUI is shown on screen while an MHP application is running, the MHP application SHALL be kept alive and not killed. (The MHP application can either be paused and re-started, or cached and then re-initiated, after the proprietary STB menu or GUI is closed/disappears.)
- In case the application is being loaded when the proprietary receiver GUI is shown, the MHP application SHALL continue being loaded in the background.
- These behaviours admit only one significant exception: the « menu » key and the proprietary menu GUI. In that case, any running/loading/paused MHP application may be killed, but it is MANDATORY that, as soon as the menu GUI disappears from the screen, any MHP autostart application be automatically re-loaded with no need of re-accessing the channel/mux.

## 6.5 Requirements for the "Undo" Function

### 6.5.1 Preface

The areas covered hereafter include:

- General requirement
- State of the IRD
- Number of keys and labelling of keys
- Key mapping and rules for applications



### **6.5.2 General Requirements**

To have a consistent man-machine interaction there is a need to have the possibility to

- « undo last » (cancelling the last action).
- « undo all » (cancelling all actions, going back to the initial state or going back to the top menu)

Those functions SHALL be implemented by the applications (resident or downloaded).

No « undo » action by the user should lead to an unexpected state, i.e. to a state different from where he started from.

### **6.5.3 States of the IRD**

For the user, the state of the receiver will determine how the receiver will behave at the next command (from the remote). As such, the state remains invisible to the user, but the behaviour has to remain consistent.

List of possible states:

- (State "zero"): "full kill", zapper-like, no MHP capability (e.g. auto-start inactive)
- (Initial state): as OoB default or as modified by user
- (Basic state): Initial state + 1 OTA app (such as a launcher). If no broadcast application available or auto-start has been set to OFF by the user, is equivalent to (Initial state)
- (Top of tree): Home page or top of menu, within an application

**The out of box (OoB) default SHALL be MHP auto-start active (see § 11)**

**The receiver SHALL never go to state "zero" if it was not the initial state on accessing the channel.**

### **6.5.4 Other groups' proposals for key mapping**

Different specifications groups have addressed (or not) this issue. The main proposals are summarized in Annex B.3.

As there is no coherence between the proposals, and some uniformity is necessary to ensure a consistent interface for the user, DGTVi established a set of recommendations:

### **6.5.5 Keys and Labelling**

2 keys are required as a minimum and 3 keys are RECOMMENDED with following labels:

#### **- 3 Keys**

- « Back » for cancel of last action (back)
- « Exit » for go to (top of tree) or (basic state)
- « TV » for go to (initial state)

#### **-2 Keys**

- « Back », for cancel of last action (back)
- « Exit », for go to (top of tree) or (basic state)

### **6.5.6 Key mapping**

#### **- 3 Keys**

- « Back » passes VK\_F9 to the application
- « Exit » passes VK\_ESC to the application
- « TV » goes to (initial state), hardwired

**- 2 Keys**

- « Back » passes VK\_F9 to the application
- « Exit » passes VK\_ESC to the application

## 6.6 Requirements for Text Entry Function

### 6.6.1 *The present situation for text input in I-TV*

Many remote controls only provide for the minimum set of codes envisioned in the MHP specification (cf. Annex G.5 to TS 101812) i.e. only provide numeric data entry. For alphanumeric entries, application developers have had to create « helper applications » to create a virtual keyboard, typically through an intermediate sequence of keys, thus potentially contravening to Annex J.5 of the MHP standard.

Furthermore key labelling is incomplete and/or different from manufacturer to manufacturer, making difficult communication about text entry with the end-user. The current terminals have different keyboard layout hence hindering easy use and service access. A standardised layout (same or “subset-compatible”) should be used for the same service when applicable, particularly for “special” characters, like “+”, “\*”, “#”, .....

### 6.6.2 *Rules for « Request Focus »*

To ensure consistent user experience, the following rules about requesting focus are defined in [21]:

- an application creating an HScene and placing components into it SHALL not by default get the input focus for these components
- the application may request to get the input focus by calling Component.requestFocus(). If this is granted and the focus moved to the requested component, this component SHALL receive input events as defined in J.1 (on page 367).
- the application may request to receive a subset of input events via the org.dvb.event API even when not having the AWT focus.
- On platforms where key events are generated from a sequence of other (intermediate) key events, the intermediate key events SHALL not be visible to MHP applications by any mechanism. Examples of these intermediate key events include:
  - For multi-key press entry (as used in some mobile phones), the keys pressed before the final value is resolved
  - For eventual predictive text entry functionality (T9 or similar systems), , the keys pressed before the final value is confirmed

### 6.6.3 *Text Entry General Requirements*

All receiver manufacturers SHALL implement text input following the DVB MHP Specification, Appendix A.7 HAVi [21].

In particular, the following classes SHALL be implemented:

- org.havi.ui.HSinglelineEntry
- org.havi.ui.HMultilineEntry

When passing numerical and alphanumeric strings to MHP applications, the receiver SHALL use, at least, the “SMS like” mode (multi-key press entry) and the remote control as a text input device. This is to be intended as the minimum requirement.

In case other text input devices and modes are used, they SHALL be in addition to the multi-key press entry and SHALL be implemented by the receiver manufacturer.

In any case, and notwithstanding which text input mode will be used (the minimum multi-key press entry or any other proprietary and additional mode), no proprietary receiver GUI will be shown on screen covering or overlapping MHP applications graphic layout, when inputting text. **As a consequence, no resident virtual keyboard SHALL be used for inputting text into a MHP application.**

Labelling of numeric pad for text input SHALL follow specifications mentioned later in this document

In assigning specific alphanumeric characters to single numeric pad keys, the manufacturers SHALL take ETSI ES 202 130 v. 1.1.1 (2003-10), page 103 table 48 "Keypad assignment for Italian" as a guideline.

**6.6.4 Key Pad Suggested assignment for text entry**

A subset of the mandatory characters is RECOMMENDED to be implemented within the overall ETSI character list.

**6.6.4.1 Standard Characters Subset**

Key	Requirement	Subset Character Sequence
abc ②	Mandatory	a b c 2 à A B C
def ③	Mandatory	d e f 3 è D E F
ghi ④	Mandatory	g h i 4 ì G H I
jkl ⑤	Mandatory	j k l 5 J K L
mno ⑥	Mandatory	m n o 6 ò M N O
pqrs ⑦	Mandatory	p q r s 7 P Q R S
tuv ⑧	Mandatory	t u v 8 ù T U V
wxyz ⑨	Mandatory	w x y z 9 W X Y Z
0	Mandatory	0 "space" "new line"

Table 16 : Standard Character subset

**6.6.4.2 Special Characters Subset**

As per ETSI ES 202 130 v. 1.1.1 (2003-10), (page 103 table 48 "Keypad assignment for Italian") all special characters have to be assigned to numeric key "1".

Key	Requirement	Subset Character Sequence
①	Mandatory	. , ; @ 1 ? ! : " % ( ) + - / * = < > € #

Table 17: Special Character Subset

The subset of special characters listed in the previous table has to be considered as the minimum mandatory requirement for manufacturers.

All receivers SHALL be compliant with the subject ETSI specification.

### 6.6.5 Text Entry Functions

The “multi-key press entry” mechanism has to provide a user experience very similar to that of Cell-phone SMS text input.

As a consequence, some simple functions have to be implemented in order to improve overall user experience when entering text:

Rule	Function	Subset Character Sequence
A	Moving cursor between characters and lines	Left arrow and Right arrow SHALL be used for moving the cursor among characters while inserting text. Up and Down arrows SHALL be used for moving the cursor among different lines while inserting text.
B	Inserting characters	In case a character has to be inserted between two characters already typed, the user SHALL move the cursor using left and right arrows. The new inserted character SHALL be placed right before the character where the cursor is located.
C	Erasing characters	A dedicated key of the remote control SHALL be used for erasing characters. Such key will be “Back” key. When TextField(HsinglineEntry) gets focus, the MHP application SHALL not consider “VK_F9” unless the text entry field is empty. If the text entry field is not empty the MHP application SHALL not perform any action on receiving “VK_F9”. Thus, "back" key SHALL be used only for erasing characters when focus is active and within one single widget. If the text input field is empty and the “back” key is pressed, MHP application SHALL remove focus from text entry field. For further specifications on interaction between text entry, resident application and MHP application please refer to the sample Xlet provided in the next section.
D	Focus gained/lost	When the user moves the focus to a text entry field it SHALL become immediately active <u>without any need</u> of pressing a particular key for activating the text field. If, while typing text within the text field, the user presses the “OK” key the characters already inserted SHALL be preserved and the focus will be lost.
E	Timeout	The cursor SHALL automatically progress to the next position 0.8 second after the last input from the remote control was received.
F	Fast sequence of different key keys.	The cursor SHALL immediately progress to the next position (and write the appropriate character) in case a numeric key, different from the previously used one, is pressed (same as for cell phones). E.g. If key “3” is pressed twice for typing letter “e” and, immediately after, key “2” is pressed twice for typing letter “b”, letter “b” has to be displayed immediately with no need for waiting any time-out period.

Table 18: Text Entry Rules

### 6.6.6 Text Entry Devices

All receivers have to use remote control as a text entry device. This is the minimum common requirement.

In case some receiver manufacturer will provide text input devices other than remote control (such as infrared keyboards): these devices will be added to the remote control. E.g. a receiver can have both the remote control and the infrared keyboard as a text entry device, but can not have only the infrared keyboard.

Remote control will be a text input device for all receivers. Resident virtual keyboards, when present, SHALL not be used for text entry in conjunction with non resident MHP applications.

In any case, any text input device will need to be compliant with the functionalities specified in the previous section.

### 6.6.7 Text Entry Layering

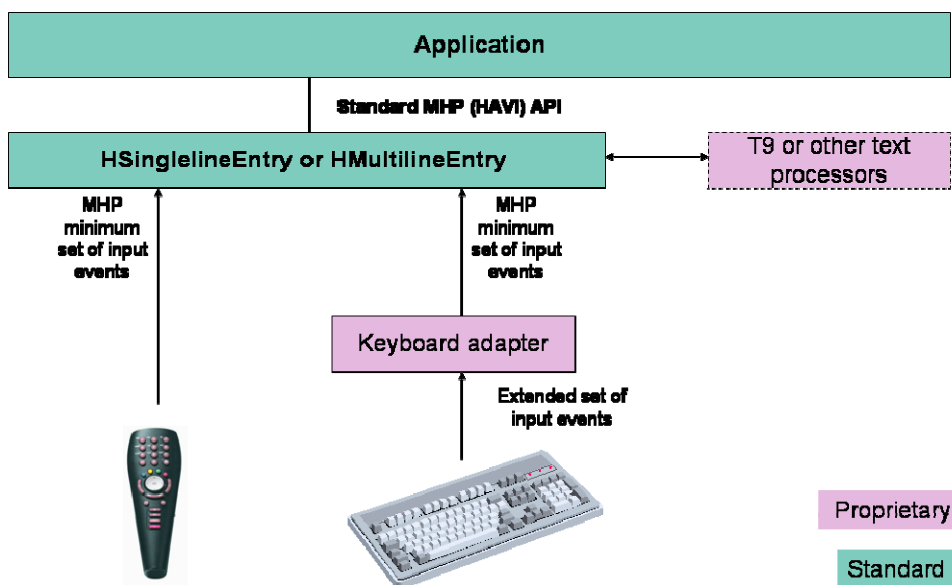


Figure 5: Text Entry Layering Schematic

### 6.6.8 Text Entry Layering - Underlying Considerations

- HSinglelineEntry and HMultilineEntry recognize only the MHP minimum set of events.
- HSinglelineEntry and HMultilineEntry SHALL handle multi-press key entries according to the specified key pad assignments and behaviour.
- Specialized (proprietary) adapters are in charge of mapping more complex events coming from richer input devices (e.g. VK\_A from an infrared keyboard) to the MHP minimum set (e.g. VK\_2 VK\_2 VK\_2 VK\_2 VK\_2 VK\_2).

Text processors, when available, SHALL act directly on HSinglelineEntry and HMultilineEntry visible output.

### **6.6.9 MHP applications and Text entry functionality**

- For objects referring to MHP classes HSinglelineEntry/HMultilineEntry, receiver SHALL activate editing mode on method *focusGained(FocusEvent e)* and de-activate editing mode on method *focusLost(FocusEvent e)*.
- Focus is lost:
  1. When object is empty (0 characters) and the keyEvent.VK\_F9 is pressed
  2. When keyEvent.VK\_Enter is pressed
- In order to have a standardized and harmonized behaviour when managing focus (*focusListener*) and events (*HkeyListener*), MHP application SHALL be compliant with the following Java class.

#### **6.6.9.1 MHP applications and Text entry sample class**

A comprehensive example is given in Annex E.

## 7 Service Information & Channel Selection

On installation, receivers must offer the viewer all services that may be received at the current location.

The services being broadcast by the satellite networks will change over time. To ensure that the viewer is always able to access every service being broadcast, the receiver must detect and reflect to the viewer any such changes with minimal viewer involvement.

Services may have an associated Logical Channel Number (LCN). Broadcasters may use this as a marketing tool for service promotion to the viewer. Consequently, when possible, receivers SHOULD present the channels so that a numeric entry will always select the service with the corresponding Channel Number.

However, viewers SHALL also be free to re-order and/or filter the channel list as they require.

Access to, and use of, accurate service information is essential if the viewer is to enjoy all of the content being broadcast. Receivers must offer a complete list of available services and information about the current and following programmes.

### 7.1 DVB Locator

The DVB locator is the unique identifier of a DVB service. It is composed of three elements:

- Original\_Network\_ID
- Transport\_Stream\_ID
- Service\_ID

Its format is `dvb://<onID>.<tsID>.<slID>[.<ctag>[&<ctag>]][;<evID>][<path>]`. (The optional parameter [`<evID>`] allows to identify a single event within a service.)

### 7.2 SI and PSI Information

Receiver specification should not put any constraints on the broadcast signal – the receiver must be robust against erroneous or incomplete signalling and present all services whenever they are present. Of course, receiver behaviour, in many cases will be dependent on the presence, in the signal, of supplementary signalling.

#### 7.2.1 Notation

The same symbols as in the E-book (# 9.1.4 [38]) are adopted for specifying the expected implementation for Broadcast or Receiver.

Meaning	Specification applies to:	
	Broadcast	Receiver
Mandatory to broadcast – this SHALL be present in all broadcasts	M	
Mandatory to understand – receivers are required to understand and act on this item		m
Conditional to broadcast – this SHALL be present if certain criteria are met (for example, certain signalling is required for CA controlled services)	C	
Recommended to broadcast – inclusion of this item improves the usefulness of broadcasts to receivers and allows them to provide better facilities to users. It is preferable for broadcasts to include this. However receivers SHALL be able to work correctly without this information	R	
Optional to broadcast – this item is allowed in broadcasts and has a defined	O	

Meaning	Specification applies to:	
	Broadcast	Receiver
meaning. However, receivers SHALL be able to work correctly without it		
Undefined to broadcast – this item is allowed in broadcasts but has no defined use within this specification. Receivers should ignore this information unless they are designed with information from other specifications that define its use	U	
Forbidden to broadcast – this item is not allowed in broadcasts as it may cause confusion to receivers that conform to this specification	F	

Table 19: Symbols notation as per E-Book

### 7.2.2 Program Map Table (PMT)

The descriptors possibly carried by this table at Program level are the following:

Descriptor	Tag	Status
Conditional access descriptor	0x09	C
Private data specifier descriptor	0x5F	C

Table 20: Program descriptors (PMT)

The descriptors possibly carried by this table at Elementary Stream level are listed hereafter.

Component	Descriptor	Tag	Status
Any	Stream identifier descriptor	0x52	C m
	Conditional access descriptor	0x09	C
	Private data specifier descriptor	0x5F	O
Audio	ISO 639 language descriptor	0x0A	C m
Private data (AC-3)	AC-3 descriptor	0x6A	C m
Private data (EAC-3)	Enhanced AC-3 descriptor	0x7A	C m
Private data (AAC)	AAC descriptor	0x7C	C m
DVB Subtitles	Subtitling descriptor	0x59	C m
Teletext	Teletext descriptor	0x56	C m
SSU stream	Databroadcast_id descriptor	0x66	O m

Table 21: Elementary stream descriptors (PMT)

#### 7.2.2.1 Multiple components of the same type

The PMT may contain multiple instances of components with identical signalling. For example, multiple audio components with the same stream type, language and audio\_type, or multiple video components in services providing multi-angle viewing (and single audio).

In this case the receiver SHALL select as default component the one with the lowest PID among those of the same type.

However, all the components SHALL be presented for manual selection when requested by the user. As another example, multiple interactive services listed inside an AIT table SHALL be presented in ascending order from the lowest application\_ID, and if multiple AIT are referenced in one PMT, their order SHALL also be preserved.



### 7.2.2.2 HD-specific elementary stream types

Further to the stream types

- 0x02 for MPEG-2 or MPEG-1 constrained parameter video streams
- 0x03 for MPEG-1 audio streams
- 0x05 for MPEG-2 TS private\_sections
- 0x06 for PES packets containing private data
- 0x0B for MPEG-2 DSM-CC type B streams

whose support is already required for SD receivers, the following stream\_type values SHALL also be supported in the scope of this HD-Book:

- 0x11 for MPEG-4 AAC and MPEG-4 HE AAC packetized elementary streams
- 0x1B for H.264/AVC video streams

The value of stream\_type for an Enhanced AC-3 elementary stream will be 0x06 (indicating PES packets containing private data), same as for AC-3.

### 7.2.2.3 Supplementary Audio

For TV-broadcasting applications, noticeably public service broadcasting, there is often a requirement for commentary or narration audio services to provide for different languages or Visually Impaired or Hearing Impaired audiences.

#### 7.2.2.3.1 DVB solution

DVB solution encompasses both receiver-mixed and broadcast-mixed Supplementary Audio. Relevant signalling specifications are contained in new Annex to latest [8] revisions.

#### 7.2.2.3.2 Enhanced AC-3 solution

Compliance with the behaviour specified in [8] §6.2.2.2 is required.

### 7.2.3 Network Information Table (NIT)

The descriptors possibly carried by this table are listed hereafter.

Descriptor	Tag	Status	
		Actual	Other
Network_name_descriptor	0x40	M m	O m
Multilingual_network_name_descriptor	0x5B	O m	O m
Linkage_descriptor	0x4A	C	C
Private_data_specifier_descriptor	0x5F	C	C

Table 22: Network descriptors (NIT first loop)

Descriptor	Tag	Status	
		Actual	Other
Satellite_delivery_system_descriptor	0x43	M m	O
Frequency_list_descriptor	0x62	R	R
Service_list_descriptor	0x41	R	R
Private_data_specifier_descriptor	0x5F	C	C
Logical_channel_descriptor	0x83	O m	O
HD simulcast_descriptor	0x88	O m	O m

Table 23: Transport stream descriptors (NIT second loop)

### 7.2.3.1 Satellite delivery system descriptor

Receivers can rely upon the modulation parameters in the satellite\_delivery\_system\_descriptors carried by the platform’s Home Channel(s) (see Annex A for Tivusat case) to build the platform’s service list, as an alternate to raw frequency scanning.

The receiver SHALL always be able to detect the modulation from the transmission itself.

If a change occurs in the “network\_id” in the NIT, during transmission, the receiver SHALL ignore it and continue to present the services already in the list and not delete them.

If a change occurs in the “network\_name\_descriptor” the receiver SHALL ignore it and continue to present the services already in the list and not delete them

### 7.2.4 Bouquet Association Table (BAT)

In some platforms BAT may be used for conveying Logical Channel Numbers (§7.3.1). Receivers addressing such platforms SHALL support BAT.

The descriptors possibly carried by this table are listed hereafter.

Descriptor	Tag	Status
		Actual
Bouquet_name_descriptor	0x47	C m
Multilingual_bouquet_name_descriptor	0x5C	O m
Linkage_descriptor	0x4A	C
Private_data_specifier_descriptor	0x5F	C
Eacem_stream_identifier_descriptor	0x86	O

Table 24: Network descriptors (BAT first loop)

Descriptor	Tag	Status
		Actual
Service_list_descriptor	0x41	R
Private_data_specifier_descriptor	0x5F	C
Logical_channel_descriptor	0x83	O m
<i>HD simulcast descriptor</i>	<i>0x88</i>	<i>O m</i>

Table 25: Transport stream descriptors (BAT second loop)

### 7.2.5 Service Description Tables (SDT)

The descriptors possibly carried by this table are listed hereafter.

Descriptor	Tag	Status	
		Actual	Other
Service_descriptor	0x48	M m	O m
CA_identifier_descriptor	0x53	C m	C m
Private_data_specifier_descriptor	0x5F	C	C
Preferred_name_list_descriptor	0x84	O	O

Table 26: Service descriptors

In presence of a CA\_Identifier\_Descriptor, the receiver SHALL always try to present the service to the end user. In case the service is effectively scrambled, and the relevant CA system is not present, the receiver SHALL present a proper message (see 7.5.1.2).

The preferred\_name\_list\_descriptor, as defined by EICTA, provides a list of alternative names, and name identifiers, for the service. This information is quasi-static.

### 7.2.5.1 Service Types

Receivers SHALL only list a service in their service selection interfaces where the service is of a type, as declared in the service\_type value in the Service Descriptor, which the receiver is able to present to the user or to a receiver interface.

NB: Users may be confused or frustrated if the receiver presents for selection services that are not decodable by the receiver (such HD services on an SD receiver) or are not intended for user selection (such as receiver firmware update broadcasts).

Receivers are required to support at least the following service types<sup>12</sup>:

service\_type = 0x01, digital television service  
 service\_type = 0x02, digital radio sound service (MPEG-1 Layer 1 or 2 audio)  
*service\_type = 0x0A, advanced codec digital radio sound service*  
 service\_type = 0x10, DVB MHP service  
*service\_type = 0x16, advanced codec SD digital television service*  
*service\_type = 0x19, advanced codec HD digital television service*

*According to DVB SI [9], service\_type=0x01 should be used for MPEG-2 SD digital television service. However, it may also be used for services using other encodings, including encodings that have a specific entry, e.g. advanced codec HD digital television service.*

*A service, as identified by its DVB triplet, will exclusively be either SD or HD.*

Support for other service types (for example service\_type = 0x06, mosaic service) is OPTIONAL.

### 7.2.5.2 Running status

Receivers are required to support at least the following values and behaviours for the running\_status in SDT:

running\_status = 1, not running      -> display banner  
 running\_status = 4, running          -> normal behaviour

## 7.2.6 Event Information Table (EIT)

### 7.2.6.1 Event Information Descriptors

The EIT can carry the following descriptors to meet the requirements of EN 300 468 [9] and TR 101 211 [15]:

<sup>12</sup> Service\_type = 0x00 is used to signal hidden services, i.e. services used by legacy MHP applications which should not be directly accessible by customers

Descriptor	Tag	Status			
		Present/Following		Schedule	
		Actual	Other	Actual	Other
Linkage descriptor	0x4A	O m	O m	C	C
Short event descriptor	0x4D	M m	M m	O m*	O m*
Extended event descriptor	0x4E	C m	C m	O	O
Component descriptor	0x50	M	M	O	O
CA identifier descriptor	0x53	C	C	C	C
Content descriptor	0x54	R	R	R	R
Multi lingual component descriptor	0x5E	O	O	O	O
Parental rating descriptor	0x55	Om	O	O	O
Time shifted event descriptor	0x4F	F	F	F	F
Private data specifier descriptor	0x5F	C	C	C	C
PDC descriptor	0x69	C	C	C	C
Preferred name identifier descriptor	0x85	O	O	O	O

\* Mandatory only if no other EPG than the one based on SI data is available on the receiver

Table 27: Event Information Descriptors

The preferred\_name\_identifier\_descriptor, as defined by EICTA, may be used in the EIT to identify the preferred service name at the time of an event and so allows a schedule of service names.

**7.2.6.2 Carriage of EIT**

It is expected that network operators carry data for current and next events concerning the services they are broadcasting, on a multiplex per multiplex basis. This will be done within the ability of the content providers to transfer the relevant data to the network operator.

**7.2.6.3 EIT schedule compression**

In order to allow efficient transmission of schedule data spanning more than just a couple of days, a private compressed version of EIT schedule tables is hereafter defined. For this purpose and for avoiding possible backwards compatibility issues, new EIT tables are introduced, using “user defined” table\_ids in [9]. Namely:

- Table\_ids from 0x80 to 0x8F are used for compressed event\_information\_section - actual\_transport\_stream, EIT schedule tables
- Table\_ids from 0x90 to 0x9F are used for compressed event\_information\_section - other\_transport\_stream, EIT schedule tables

Compression algorithms and further details are given in Annex F.

**7.2.7 Summary of mandatory tables**

Table	Actual	Other
Program association table	M m	N/A
Program map table	M m	N/A
Conditional access table	C	N/A

Table	Actual	Other
Network information table	M m	C m*
Bouquet association table	C m*	N/A
Service description table	M m	M m
Event information table present/following	M m	M m
Event information table schedule	O m**	O m**
Event information table schedule (compressed)	O m**	O m**
Time and date table	M m	N/A
Time offset table	R m	N/A
Running status table	U	N/A
* Mandatory only for receivers which intend to support platforms using this table		
** Mandatory only if no other EPG than the one based on SI data is available on the receiver		

Table 28: List of mandatory tables

### 7.3 Private Data

When private descriptors are present in a broadcast, a private data specifier descriptor should be used (cf. EN 300 468) to identify the definer of the private descriptor. For the Logical Channel Descriptor, the private data specifier value used in the E-Book, as registered in ETSI TR 101 162, should be used; it is the one registered for EACEM (EICTA today).

The following table lists this value and the other private SI items that are defined within its scope.

Organisation/ specification	PDSID	Private SI information	Value	Type
EACEM	0x00000028	Eacem stream identifier descriptor	0x86	Descriptor tag
EACEM	0x00000028	Logical channel descriptor	0x83	Descriptor tag
EACEM	0x00000028	Preferred name list descriptor	0x84	Descriptor tag
EACEM	0x00000028	Preferred name identifier descriptor	0x85	Descriptor tag
EACEM	0x00000028	HD simulcast descriptor	0x88	Descriptor tag

Table 29: Private SI recognised in the E-Book

#### 7.3.1 Logical Channel Descriptor

The logical channel descriptor provides a default channel number label for services. This information is quasi-static. The logical channel descriptor may be inserted once in the second descriptor loop of the NIT (actual or other) or of the BAT.

A platform will define its own channel list, which will be broadcasted through logical channel descriptors inserted into Home Channel(s)'s NIT(s) (actual and/or others) or BAT.

All receivers compliant with this specification SHALL recognize this information and enlist services accordingly. All other channels that are received by the STB, but are not included in the platform's channel list, must NOT be discarded, but given a position in the 1000+ range.

By periodically checking (at least once a day and anyway each time the receiver is put into standby mode) the Home Channel, the receiver SHALL recognize possible additions/deletions/changes into broadcasted platform's channel list and update its own accordingly.

An example of LCN implementation on satellite platform and the structure for logical channel descriptor are given in Annex A. Expected behaviour for DTT/SAT “combo” receivers under LCN handling respect is given in Annex J.

The logical channel number does not take into account the service type, i.e. all service types share the same number space.

Syntax	No. of bits	Type
logical_channel_descriptor{		
descriptor_tag	8	uimsbf
descriptor_length	8	uimsbf
for (i=0; i<N; i++){		
service_id	16	uimsbf
visible_service_flag	1	bslbf
reserved	5	bslbf
logical_channel_number	10	uimsbf
}		
}		

Table 30: Syntax of the Logical Channel Descriptor

#### 7.3.1.1 Descriptor\_tag

This has been assigned to be 0x83.

#### 7.3.1.2 Service\_id

This is a 16 -bit field which serves as a label to identify this service from any other service within the network. The service\_id is the same as the program\_number in the corresponding program\_map\_section.

Services SHALL be included irrespective of their running status.

#### 7.3.1.3 Visible\_service\_flag

When set to ‘1’, this 1-bit field indicates that the service is normally visible and selectable (subject to the service type being suitable, etc.) via the receiver service list. When set to ‘0’ this indicates that the receiver is not expected to offer the service to the user in normal navigation modes. However, the receiver SHOULD provide a mechanism to access these services (for example, by direct entry of the logical channel number).

See also Receiver rules.

Support by receivers of the visible\_service\_flag is MANDATORY.

#### 7.3.1.4 Reserved

All “reserved” bits are set to ‘1’.

#### 7.3.1.5 Logical\_channel\_number

This is a 10 -bit field which indicates the broadcaster preference for ordering services. Its use is defined in the following table:

logical_channel_number	Description
0	Service not suitable for selection by the user a)
1 - 999	logical_channel_number
1000 - 1023	rfu – not usable

a ) For example, the value zero may be used for data services only intended for selection from interactive applications or for firmware download services, etc.

Table 31: Logical Channel Number

Any service with LCN=0 SHALL be ignored.

See also Receiver rules.

### 7.3.2 The Logical Channel Numbers (LCN)

The role of the LCN is to enable user presentation of service numbers in a convenient and familiar form.

#### 7.3.3 Network operator rules

Network operators and content providers operating within an open satellite platform have supposedly elected to choose a service numbering scheme between them.

This specification defines the logical channel number concept for conveying such service numbering information to receivers. Network operators should obey the following specification rules in order for receivers to be able to properly operate.

Platform's LCNs may be carried in NIT<sub>actual</sub> and/or in any NIT<sub>other</sub> or in BAT possibly present on the Home Channel(s). Redundancy rules for Home Channel set out in Annex A apply.

The centralized mechanism for LCN broadcast defined by this specification will avoid, under normal operating conditions, any conflicting allocation of LCN on the given platform.

Logical channel numbers allocated SHOULD be usable directly as service numbers in a receiver.

##### 7.3.3.1 Multiples LCNs for a single service

Network operators and/or service providers may allocate up to four LCNs to a single service. This allows the service to be identified and associated with other services according to different criteria, such as local service, with pay elements, belonging to a specific bouquet and being of specific thematic content.

Only handling first LCN per service is mandatory.

##### 7.3.3.2 Invisible services

It is RECOMMENDED to allocate high service numbers to services marked as invisible to avoid accidental collision of service numbers with those of visible services when they are being automatically or manually reallocated.

### 7.3.4 Receiver rules

Receivers SHALL provide an automatic service numbering facility on the basis of logical channel numbers with the rules set out below.

It SHOULD be possible for the user to select, in the set up menu, the possibility to switch off and on this automatic ordering possibility. Default setting SHALL be ON.

#### **7.3.4.1 General rules**

The receiver SHALL be able to associate with one service (i.e. with a unique triplet) at least the first logical channel number set by the broadcaster in the LC descriptor associated with that service. Support of other possible LCNs (up to 4) associated to the same service is OPTIONAL.

When a viewer uses the channel up-down arrows, the receiver SHALL skip all service numbers which are not allocated or are allocated to “invisible” services.

In the following sections a comprehensive specification for LCN handling by receivers is provided. This specification is meant to

- Leave the user the ultimate freedom to override any broadcaster-defined LCN
- Cope with network evolution (e.g. new services on-air; LCNs introduced later for services already on-air)

#### **7.3.4.2 Logical channel number zero**

Services associated to logical channel number 0 SHALL be disregarded as part of the process below (irrespective of the value of the `visible_service_flag`). These services are not intended to be presented as part of the viewer’s service list. These services are not intended to be selectable by viewers.

#### **7.3.4.3 Invisible services**

- Receivers SHALL support a “default” mode in which they will not show services marked “invisible” in their user service list or selectable in normal P+/P - browsing.
- The receiver SHALL ignore the presence of “invisible” services when (re-) allocating services to service numbers requested by “invisible” services.
- Receivers SHALL support a mode (for example as a service mode or as an installation option) in which it will allow direct selection of all services (irrespective of being marked invisible) by the user. This mode may display all services also as part of the Service List in this mode.
- It is a manufacturer option to combine the two modes mentioned above, by allowing direct selection of “invisible” services while not showing them as part of the Master User List.

#### **7.3.4.4 Service List management**

##### **7.3.4.4.1 First initialisation**

When a receiver is first initialised or reinitialised (e.g. because the user applied for a factory reset), it is expected that a user will be present in front of the receiver. However, it SHOULD also be possible to have a fully automatic procedure. This means that, at any point where a user interaction is requested, there MAY be a time-out and an automatic selection procedure.

The receiver SHALL perform in accordance with the following rules:



- a) It SHOULD give the user the possibility to choose between automatic (LCN-driven) and manual (based on discovery) service numbering (see above).
- b) If automatic service numbering has been selected the receiver SHALL allocate in the Service List each service with associated LCN(s) to the service number(s) equal to the LCN(s) requested for that service.
- c) If a service does not have an associated logical\_channel\_number, it SHALL be allocated an available number in the 1000+ range.

**7.3.4.4.2 Service List update**

When the receiver, as a result of an update check (whether manual or automatically, in stand-by or in operate mode) on the Home Channel(s), recognizes that there has been a change in the platform’s Service List (service added, removed or reordered), it SHALL add, remove, and reorder the services as indicated by the LC descriptors.

If no LC descriptor is specified for a service (this means that the service is not part of platform’s offer) then it SHOULD be listed at the last position occupied by services not belonging to the platform.

**7.3.4.5 Network re-configuration**

For major network reconfigurations, it is RECOMMENDED that the user proceed with a re-installation, even at the risk of losing his/her custom numbering, if any.

**7.3.4.6 Change of LCN numbering scheme**

Any re-arrangement by the broadcasters of LCN numbering of services will be treated as above under network re-configuration. This implies that user changes and non-default allocation of services to service numbers by the receiver SHOULD be preserved as much as possible unless a re-installation is done.

**7.3.5 HD Simulcast Logical Channel Descriptor**

*The HD Simulcast Logical Channel Descriptor [38] provides a means to override the default channel number label of services for an HD receiver. This information is quasi-static.*

*The HD simulcast logical channel descriptor may be inserted in the second descriptor loop of the NIT<sub>actual</sub> and/or in any NIT<sub>other</sub> or in BAT possibly present on the Home Channel(s). The descriptor may appear more than once in this location. The constraints on uniqueness are the same as those for the logical channel descriptor.*

Syntax	No. of bits	Type
<i>HD_simulcast_descriptor{</i>		
<i>descriptor_tag</i>	8	<i>uimsbf</i>
<i>descriptor_length</i>	8	<i>uimsbf</i>
<i>for (i=0; i&lt;N; i++){</i>		
<i>service_id</i>	16	<i>uimsbf</i>
<i>visible_service_flag</i>	1	<i>bslbf</i>
<i>reserved</i>	5	<i>bslbf</i>
<i>logical_channel_number</i>	10	<i>uimsbf</i>
<i>}</i>		
<i>}</i>		

Table 32: Syntax of the HD Simulcast Logical Channel Descriptor

#### **7.3.5.1 Descriptor\_tag**

*This has been assigned to be 0x88.*

#### **7.3.5.2 Service\_id**

*This is a 16-bit field which serves as a label to identify this service from any other service within the network. The service\_id is the same as the program\_number in the corresponding program\_map\_section. Services SHALL be included irrespective of their running status.*

#### **7.3.5.3 Visible\_service\_flag**

*When set to '1', this 1-bit field indicates that the service is normally visible and selectable (subject to the service type being suitable, etc.) via the receiver service list. When set to '0' this indicates that the receiver is not expected to offer the service to the user in normal navigation modes. However, the receiver SHOULD provide a mechanism to access these services (for example, by direct entry of the logical channel number).*

*See also Receiver rules.*

*Support by receivers of the visible\_service\_flag is mandatory.*

#### **7.3.5.4 Reserved**

*All "reserved" bits shall be set to '1'.*

#### **7.3.5.5 Logical\_channel\_number**

*This is a 10-bit field which indicates the broadcaster preference for the ordering of services. This descriptor SHALL only be interpreted by receivers that are able to decode an advanced codec HD digital television service. The channel number label assignment defined by this descriptor overrides the channel number label assignment defined by the Logical Channel Descriptor. The rules for the set of channel number labels used by this descriptor is the same as the rules for the set of channel number labels used by the Logical Channel Descriptor.*

*In the case where this descriptor assigns to a service (service A) a channel number label which is already assigned to another service (service B) (perhaps by the Logical Channel Descriptor), the receiver SHALL treat the original service (service B) as having no assigned channel number label and assign one automatically in the normal manner.*

*This descriptor is intended to be used for HD services broadcast in simulcast with the same service in SD so that the HD service appears at the primary channel number label on HD capable receivers while the SD service appears at that label for SD-only capable receivers.*

#### **7.3.5.6 HD simulcast LCN operation**

*Expected receiver behaviour is outlined in the following flow chart.*

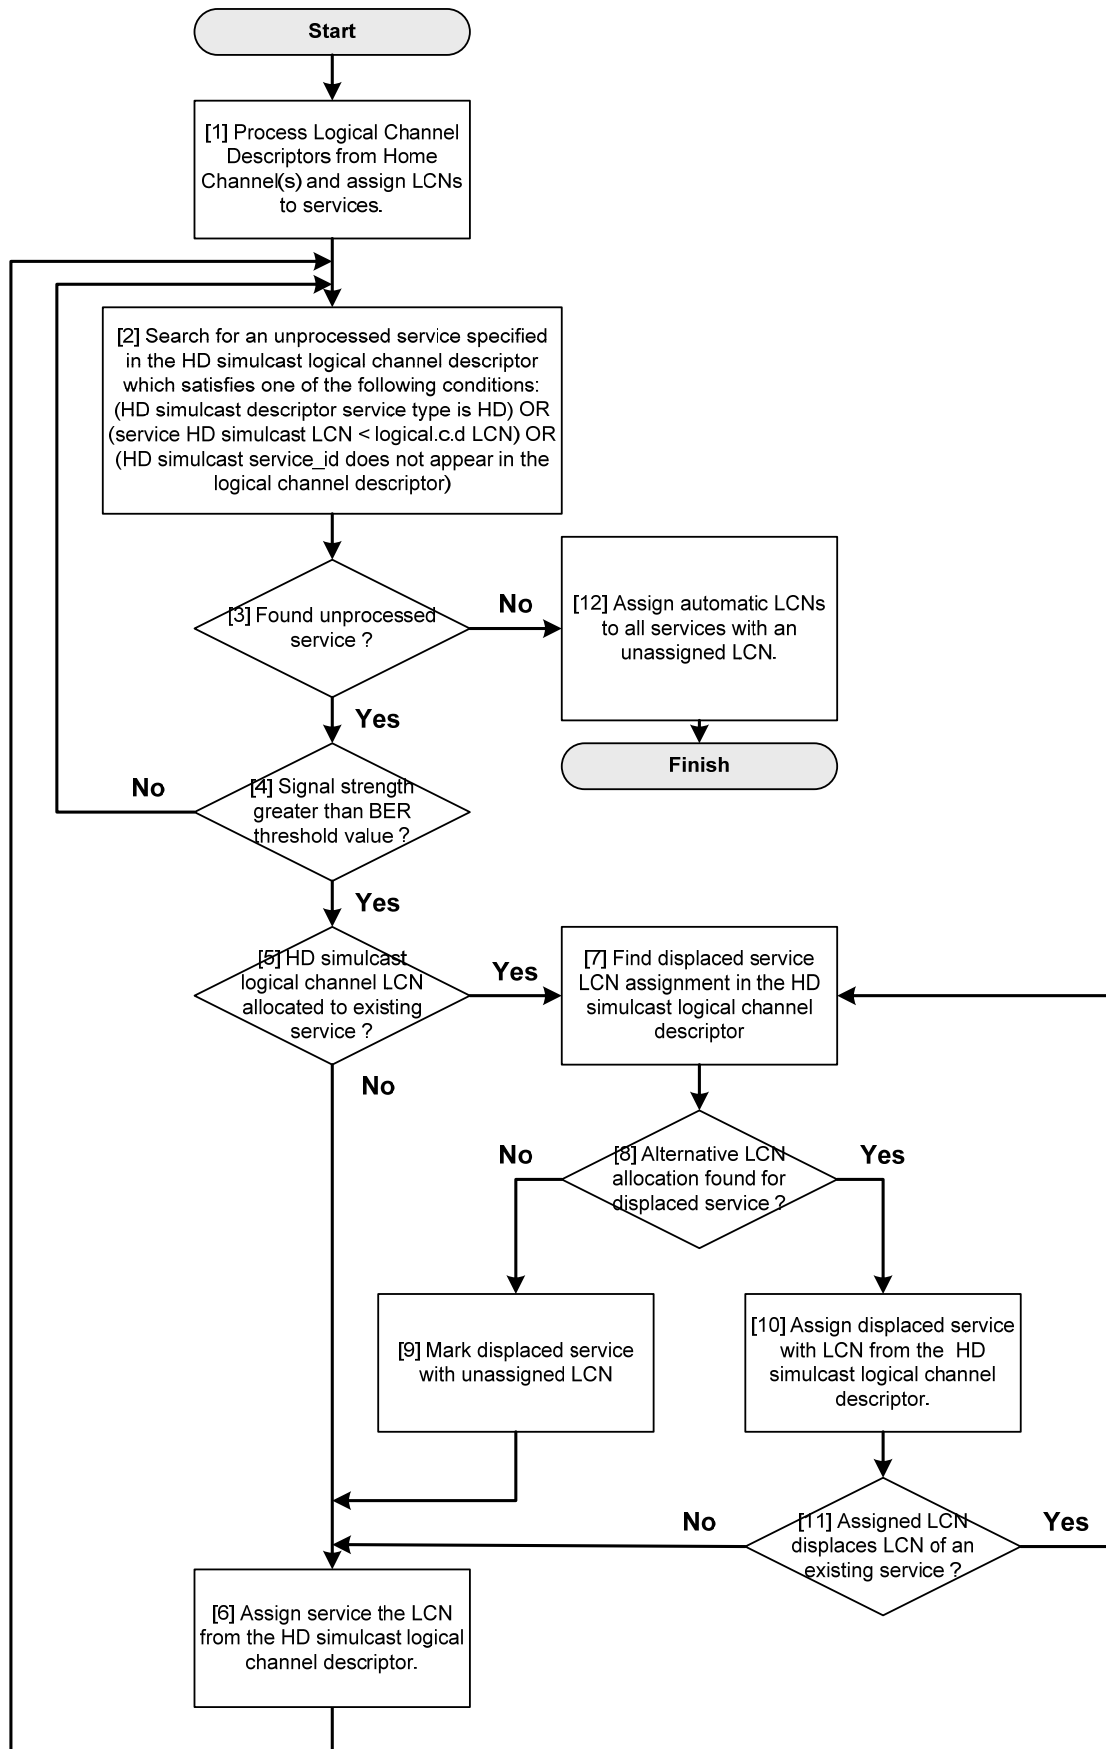


Figure 6: HD Simulcast LCN operation

## 7.4 Service-variation options

Service availability descriptor will not be used on platforms complying with this specification.

## 7.5 Receiver functions

### 7.5.1 Service Change

When changing service, parameters need to be set to deal with video formats, languages and unexpected failures in service selection. The minimum requirements for receiver behaviour during service change are outlined in the following paragraphs.

#### 7.5.1.1 Audio language

It is assumed that the user has entered one or more language preferences during the receiver installation process. If the selected service has audio tracks in more than one language, the language is selected according to the user preferences.

- If preferred languages do not match any of the available languages, then the receiver SHALL automatically select the "undefined" ("und" code of the ISO\_639\_Language\_descriptor) audio stream.
- If "undefined" stream is absent, the stream with the lowest PID (lowest numerical value - unsigned integer) in the specified program SHALL be selected.
- In case no language descriptor is specified the audio stream with the lowest PID SHALL be selected.

In addition to this automatic soundtrack selection, it SHALL always be possible for the user to manually select any of the available languages.

#### 7.5.1.2 CA controlled services

Where a component cannot be presented due to the presence of scrambling, a proper message SHALL be displayed. Otherwise the receiver SHALL present the component, even in the presence of a CA descriptor.

#### 7.5.1.3 MHP services

The receiver SHALL present all of the components of the service in accordance with the user preferences (limited only by its ability to actually present the components).

### 7.5.2 Service Not Available

If the video component within a video service, the audio component in a radio service or the data component in a data service can not be presented because it is no longer accessible on the registered parameters (PID, etc), an error message is shown to the user indicating that the service can not currently be accessed. In case secondary components are missing, the STB SHALL present the main component of the service: e.g. a video service with no audio component shall be presented anyway with no error message.

The receiver SHALL present all the components of a service it can present.

### 7.5.3 Active Format Descriptor

**Transmission of this description by the broadcaster is optional, but, when present, use of this description by the receiver is MANDATORY.**

As explained in Annex B of ETSI TS 101 154 [8] "The Active Format Description (AFD) describes the portion of the coded video frame that is "of interest". It is intended for use in networks that deliver mixed formats to a heterogeneous receiver population. The format

descriptions are informative in nature and are provided to assist receiver systems to optimize their presentation of video.

“ [...] The AFD is intended for use where there are compatibility problems between the source format of a programme, the format used for the transmission of that programme, and the format of the target receiver population. For example, a wide-screen production may be transmitted as a 14:9 letter-box within a 4:3 coded frame, thus optimized for the viewer of a 4:3 TV, but causing problems to the viewer of a wide screen TV.

The appropriate AFD may be transmitted with the video to indicate to the receiver the "area of interest" of the image, thereby enabling a receiver to present the image in an optimum fashion (which will depend on the format and functionality of the receiving equipment combined with the viewer's preferences). [...]

The AFD itself does not describe the aspect ratio of the coded frame (as this is described elsewhere in the MPEG-2 video syntax).”

The use, by the broadcaster, of this description allows it to optimize the presentation of its program for both 4:3 and 16:9 displays. Therefore, by default, the receiver SHALL make use of this descriptor. However, the manufacturer may implement a manual override and/or a manual disable.

#### **7.5.3.1 Syntax and Semantics**

For standard definition programs, the receiver SHALL recognize AFD transmitted according to [8] Annex B.2.2.

In case of HDTV compatible receiver, the receiver SHALL recognize AFD transmitted according to [8] Annex B.3.2.

#### **7.5.3.2 Valid Values for Descriptor**

All values referenced in [8] Annex B “table B.2 active\_format” are valid value in the broadcast signal.

#### **7.5.3.3 Behaviour of receiver in presence of AFD**

The receiver SHALL behave in accordance with “The DTG Receiver Implementation Guidelines” [28].

NB: AFDs supplement and qualify - but do not replace - the aspect ratio flag carried in the MPEG sequence header of digital broadcasts. Receivers must interpret both the aspect ratio flag and the AFD in order to present the image in the correct manner.

#### **7.5.3.4 Analogue output of the receiver**

The receiver SHOULD reinsert WSS data in analogue standard definition outputs according to what is specified in [28].

#### **7.5.3.5 AFD and HDMI**

*Receivers with HDMI output are RECOMMENDED to provide at least one of the following methods to process aspect ratio and AFD information for video output on HDMI:*

- *Provide a reformatting function for the video to match the aspect ratio of the display based on AFD, aspect ratio and user preference as per section 6.4.3.5 in [28] (for 16:9 displays). Support for scaling to 4:3 aspect ratio for HDMI is OPTIONAL (since consumer HD displays are 16:9). Aspect ratio signalling in the HDMI AVI Infocodebits R0..R3, M0, M1 (see CEA-861) SHALL be set in accordance with the properties of the video on the output.*
- *Pass the video to the HDMI output unprocessed with respect to AFD and aspect*

*ratio scaling, and pass AFD and aspect-ratio signalling in the video to the HDMI output as part of the AVI Infoframe bits R0..R3, M0, M1 (see CEA-861)*

## 7.6 Network Connection (Tuning)

A general principle is that any scanning procedure SHALL make accessible to the user all the services available at a given location.

The receivers SHOULD be able to automatically and regularly update the channel and service list without the need of direct intervention by the viewer. This will make much easier for the final user to install the receiver and to keep the receiver updated with all the new channels and services that can be received in his coverage area.

Obviously, the viewer has to be able to perform a complete scan at any moment, either manually or automatically. Furthermore, the viewer must have the possibility to disable the automatic channel and service list update procedure.

### 7.6.1 General Requirements

In order to make receivers capable of managing the situations previously described, the following functions SHALL be implemented:

- **manual full scan:** the procedure, initiated by the user, performs a full (automatic) scan of the spectrum and can be used to **update** the channel and service lists or to **re-install** everything from scratch;
- **manual scan (single channel):** a manual tuning procedure allowing the user to manually select and tune a single transponder (giving for example the transponder number)
- **automatic full scan:** the procedure is initiated automatically by the receiver and performs a full (automatic) scan of the spectrum with the only purpose being to update the lists;

The receiver SHALL be able to register at least 2000 services. Receivers SHOULD be able to register at least 4000 services.

### 7.6.2 First Installation Procedure

- At first installation the receiver SHALL perform an automatic scan over all the Ku Band, searching for all the digital services available.
- At the end of the scan, all the channels and services found (audio/video/data) are stored in the channel and service list
- If an automatic ordering of channels and services mechanism is available (based on a LC numbering scheme) the resulting list will be organised according to the criteria described above
- The receiver SHALL provide an interface allowing the user to access the list and move or discard services from the list.
- When either the manual or automatic scan procedure is started for updating the service list, those services that are included in the discarded services list SHALL not be re-introduced in the main channel list. In case the service list is reinstalled, both the main service list and the discarded service list SHALL be re-initialized.

### 7.6.3 Manual Full Scan Procedure

#### 7.6.3.1 Update

The receiver SHALL:

- update (where necessary) in the list those services which were already existing; for example the receiver SHALL detect a “service\_name” change of a given programme and update it.
- not update the service name in case it was manually edited by the end user.
- insert newly available channels or services (audio/video/data) in the relevant list(s) at the proper position (platforms’s LCN or 1000+ range).

### 7.6.3.2 Re-install

Same as §7.6.2.

### 7.6.4 Manual Scan Procedure (Single Channel)

The receiver SHALL:

- update (when necessary) in the list, those service names which were already present, except for those that were manually edited by the end user; for example the receiver SHALL detect a “service\_name” change of a given programme and update it;
- insert new available channels or services (audio/video/data) in the relevant list(s) at the proper position (platforms’s LCN or 1000+ range)

### 7.6.5 Automatic service list update

To maintain an up to date service list, the receivers SHALL implement an automatic service list update procedure, in accordance with the following requirements (specific implementation is left up to manufacturers):

1. The receiver SHALL perform an automatic check of the information carried in the platform’s Home Channel(s) at regular intervals (e.g. at a specified hour and with a specified frequency) or whenever possible.
2. The automatic check can be performed both in stand-by mode (MANDATORY) and in operate mode (OPTIONAL). In case of receivers with constraints on power consumption in stand-by mode, the automatic check will be performed before either entering or leaving stand-by mode. Refer to the following table for automatic check default settings.
3. The automatic scan in either mode can be disabled – separately - by the user, but, as a default setting, it is active only in stand-by mode.
4. When the receiver performs the check it compares any single service found in NIT<sub>actual</sub> and/or in any NIT<sub>other</sub> or BAT possibly present on the Home Channel(s) with the list of services already registered for the platform. This comparison will be based on Ts\_ID, On\_ID and service\_id of the services.
5. If any new service is found with TS\_id, On\_id or Service\_id different from those of the channels already registered, it will be added in the relevant list(s) at the proper position (platform’s LCN or 1000+ range) and a message will be shown on screen when the receiver is switched on (if it was in stand-by mode) and will be left on screen until the user presses the OK key.
6. The message will be something like: “New channels were found and added in the channel list”. Italian Translation: “Sono stati trovati nuovi canali in onda. I nuovi canali sono stati aggiunti alla lista canali”.
7. At the end of the update procedure any service with an LCN whose TS\_id, On\_id or Service\_id are different from those of any service currently advertised on the Home Channel(s) will be removed from the service list.
8. In case both the “search for new channels in stand-by mode” and the “search for new channels in operate mode” options are set on “YES”, than the receiver must start the automatic scan at the time indicated for performing the channel search in operate mode.
9. In case the “search for new channels in operate mode” is available and set on “YES”, at the time specified for starting the procedure, a 30 seconds countdown

will appear on screen with a message like the following: “The receiver will start looking for new channels in ... seconds”. Italian translation: “Il Box Interattivo comincerà la ricerca di nuovi canali entro ... secondi” (mutatis mutandis for iDTV sets). The user will be able to press “OK” for letting the procedure start immediately or “exit” for aborting the procedure. In case the user will choose “exit”, the procedure will be aborted and will not be performed again until the next scheduled time.

10. In case the “search for new channels in stand-by mode” option is set on “YES”, but the “search for new channels in operate mode” option is available and set on “NO” (or was aborted – refer to previous point), the receiver SHALL start the check procedure 1 hour after being put in stand-by mode (in case the receiver is put in stand-by mode more than once a day, this procedure has to be performed only once daily)

### 7.6.5.1 Default settings for automatic scan

N.	Settings / Italian Translation	Mandatory default settings
1	“Automatic search for new channels in stand-by mode” / “Ricerca automatica di nuovi canali in stand-by”	YES / SI'
2	“Automatic search for new channels in operate mode” / “Ricerca automatica di nuovi canali a decoder acceso”	NO / NO (if available)
3	“Time” / “Ora”	04:30 AM
4	“Repetition” / “Frequenza”	“Daily” / “Quotidiana” = default (“Weekly” / “Settimanale” – other options possibile)

Table 33: Default setting for automatic scan

### 7.6.6 Automatic Ordering of Channels and Services in absence of LC descriptor acquisition

If the off-the-air LC descriptor acquisition mechanism is not activated in the receiver, the services SHALL appear in the order they have been detected (taking into account the procedure described in 7.6.2) and grouped into three categories in the following order:

- TV channels
- Radio channels
- Channel independent Interactive Services (un-bound interactive services)

The receiver SHALL be able to store at least 2000 services. Receivers SHOULD be able to store at least 4000 services.

### 7.6.7 Network evolution

As specified in Table 33: Default setting for automatic scan, the receiver SHALL implement, by default, an automatic scanning procedure, to adapt the receiver to the evolution of the network.

As specified in 6.1.1.1, changes in modulation parameters of existing services SHALL be automatically detected.

### 7.6.8 Default channel numbering of services

No default service numbering SHALL be implemented by manufacturers.



## 7.7 User interface to the SI carried data

This clause describes the minimum set of views of the SI information that receivers shall (M), should (R) or may (O) be able to present to the user.

The minimum lengths for text fields (if present) that SHALL be displayed by receivers are defined in the following table. Note that the figures given are for the number of displayable characters (including spaces) required to represent the text field. The number of bytes required will depend on the use of control codes and whether one or two byte character representation is used.

Field name	Field length in displayable characters	M/R/O	Comments and examples
Network Name	24	O	"Operator X"
Service Provider Name	20	O	"Media Company Y"
Service Name or Preferred Name	32	M	"Italia International" Full name for display on set-up menus
Short Name of Service	8	O	"It.Int"  A short version for display on browse and listing display. Possibly shortened by broadcasters from full name by use of escape characters as defined in TR 101 211. Otherwise the full length Service Name SHOULD be displayed.
Event Name	40	M	"La Grande Zia"  Individual broadcasters are free to add an episode title to the title within the space, for example "Lo Zio: la Storia Segreta"
Short Event description	200	M	"Un giorno, Zio esce per cercare sigarette. Torna venti anni dopo." Broadcasters must ensure that the text does not overflow the maximum descriptor size.
Extended Event Text	3984	O	The extended event text complements the short event description.
Component description	32	O	"In alta definizione"

Table 34: Text Field Lengths

### 7.7.1 Timer

It must be locked only to the Time & Date Table (TDT) of platform's Home Channel(s) (see Annex A for Tivusat case) and adjusted by the associated Time Offset Table (TOT). In other words, the receiver's timer SHALL be updated only whenever the Home Channel is tuned, including during stand-by. Tuning any other multiplex, including those which will carry services belonging to platform's bouquet, SHALL have no effect on receiver's timer.

### 7.7.2 Access to the Service list

Access to the Service List SHALL be provided through a dedicated key (RECOMMENDED) or by a resident menu. This list SHALL present TV Channels, Radio Channels, and Independent Interactive services (i.e. when they are not bound to a TV or a Radio service, or another Interactive Service) following the indication of the associated LC descriptor.

If the LCN acquisition mechanism is not active, the Service List SHALL be grouped by:

- TV services,
- Radio services and
- Interactive Services.

Within Interactive Services, only those who appear in an SDT with "service\_type=0x10" (DVB MHP service) SHALL be listed.

### **7.7.3 Access to the list of service-bound MHP applications**

When tuned to a specific TV or Radio service or to an Independent Interactive Service, access to the list of MHP applications associated to that service (usable by the receiver) SHALL be provided through a dedicated key (RECOMMENDED) or by a resident menu.

---

## 8 Resident Software and API

Enhanced and interactive television services are an essential part of the Digital TV proposition. Receivers must fully support all specified functionality.

The receiver shall access all platform's television, radio and interactive services, based on MHP standard 1.1.3. Receivers shall implement the most current version of the specification, to take advantage of bug corrections.

This shall include the capability to: efficiently handle Digital Text and Enhanced Broadcast elements of all services; display subtitles (where broadcast) if requested by the viewer; handle both widescreen and 4:3 picture formats as required for the connected display.

### 8.1 Services

#### 8.1.1 Video Dripping

The receiver shall support Video Dripping as specified in the MHP Standard: ETSI TS 101 812, # 7.1.3 [21]. This is used to visualise dynamic graphical applications (e.g. slide shows).

#### 8.1.2 Teletext

Teletext [11] is an important medium in Italy. Not all analogue Teletext services will immediately be converted to MHP applications. Thus there is a need to maintain compatibility with DVB Teletext [10].

The DVB Teletext signal SHALL be decoded and presented within the receiver and displayed using graphical functions (so-called Teletext Mode 2). That's particularly true for STBs as (analogue) VBI Teletext signal cannot be carried across (digital) HDMI interface. At least level 1.5 Teletext, as defined in ETS 300 706 [11], SHALL be supported.

One single remote control is then sufficient to view audiovisual services and Teletext using the "Text" key.

In order to preserve customers' investments in TV sets with advanced Teletext features, Teletext signal SHALL be anyway reinserted on the TV SCART and RCA (if present) VBI lines. Insertion SHALL conform to ITU-R BT.653-2 [24]. Teletext data will be inserted from lines 6 to 22 and 320 to 335.

It is RECOMMENDED that VBI data, including Teletext, be reinserted on the VCR SCART (including the Y/C signals) when present (see 6.1.4.2), even if many VCRs will not be able to replay this data. Insertion SHALL conform to ITU-R BT.653-2 [24]. Teletext data will be inserted from lines 6 to 22 and 320 to 335.

#### 8.1.3 Subtitling

Concerning subtitling, and generally speaking, it is expected that broadcasters will follow the EBU recommendation on subtitling in digital services [7]. However, compatibility must also be maintained with subtitling through Teletext.

As a consequence, the receiver SHALL implement DVB Subtitling and Teletext subtitling.

##### 8.1.3.1 DVB Subtitling

DVB Subtitling [14] SHALL be implemented in conformance with the MHP Standard [21].

*HD Subtitling SHALL be implemented according to EICTA Advanced E-Book [38].*

*A Display Definition Segment shall only be included in the subtitle stream when the video is HD. The maximum display\_width shall be 1919 and the maximum display\_height shall be 1079. It is RECOMMENDED that receivers support Display Definition Segments.*

### **8.1.3.2 Teletext Subtitling**

Teletext subtitling is part of both Teletext modes described above. Information about the presence of Teletext subtitles SHALL be obtained from the teletext descriptor and this information SHALL be made available to the user, at his request (e.g. when pressing the “Sub” key, or through a banner).

It is acceptable to make the user select the relevant teletext page for viewing subtitles, as long as a clear message on the availability and modality of access to the subtitles is presented to the user (e.g. a channel banner).

Where possible, receivers SHOULD be able to display both subtitles and interactive graphics simultaneously. However, not all receivers may be able to do this: in that case, when an application is activated, it SHALL be able to suspend the rendering of teletext (See also section # 13.5.2 Relation to graphics in the MHP Specification [21]).

## **8.2 Resident Software**

### **8.2.1 Resident Manufacturer Specific Applications**

#### **8.2.1.1 Navigator**

It SHALL be present. It is defined by the manufacturer. Ref.: [1]

##### **8.2.1.1.1 Handling of input events by the Navigator**

When the receiver is in TV Viewing Mode (see definition in §4.1), it is expected that any running application SHALL release input keys VK\_0 to VK\_9. The Navigator SHALL always be able to handle those input events.

The Navigator must also handle all the other keys used for TV viewing (e.g. channel list, volume, and channel up/down). Those keys are different from the keys of the “Interactive Pad” (see §6.2).

### **8.2.2 Parental Control**

The receiver SHALL provide a PIN-controlled Parental Control menu to perform the following functions:

- 1) setting age thresholds (at least for 14 and 18 years) for viewing single events
- 2) changing the PIN value
- 3) activating/deactivating PIN checking on 1), 2), 3) above and on the menu itself

From the receiver Parental Control menu it SHALL be possible setting an age threshold to be matched against the value set by broadcasters, on a per event basis, in the Parental\_rating\_descriptor of the EIT. If this value is equal or greater than the age threshold set, the current event can be viewed only entering a PIN. Such PIN is the same as the receiver’s Parental Control PIN (if any). The PIN protection can be enabled/disabled by means of an appropriate receiver menu. At least the 14 and 18 years thresholds must be present.

The receiver SHALL exercise parental control at event level only if there is an EIT associated to it, with a meaningful Parental\_rating\_descriptor carrying the same country code as the one set in the receiver at installation time.

From the receiver Parental Control menu it SHALL be possible changing the associated PIN value. The default value of this PIN for an out-of-the-box receiver could be either set in the factory by the manufacturer or by the customer at installation time. Reset of the PIN to the default value can only be achieved through an overall receiver reset to the out-of-the-box status.

By default the receiver SHALL be set to block all event and/or channels flagged with an 18 years threshold. Locking/unlocking single services could be also optionally offered by manufacturers.

In this case from the Parental Control menu it will be possible to lock one or more specific services so that they can be viewed only entering a PIN. Such PIN is the same as the receiver's Parental Control PIN (if any). The PIN protection can be enabled/disabled by means of an appropriate receiver menu.

### **8.3 Multimedia Home Platform**

**Manufacturers SHALL implement the latest version of the specification (presently MHP 1.1.3 [21] with the relevant extensions defined hereafter and in the D-Book) and SHALL provide timely update patches/updated builds for the installed base.**

*Minimum requirement for both STBs and iDTVs is Interactive Broadcast Profile. DVB-HTML support is RECOMMENDED<sup>13</sup>.*

*Support of 1920x1080 graphics resolution is OPTIONAL.*

*Support of 960x540 graphics resolution is OPTIONAL.*

*Until a suitable MHP 1.1.3 test suite becomes available, manufacturers SHALL provide a self-declaration stating that all MHP 1.1.3 functionalities have been implemented.*

#### **8.3.1 Auto-start Applications**

In case an application is signalled as "auto-start", all the standard TV functions SHALL be accessible as normal, and their use SHALL not cause an interruption to the MHP application downloading.

When application autostart is ON, progress loading bars or other icons SHALL NOT be displayed while applications signalled as "autostart" are being loaded or started. Such icons SHALL instead be displayed in case applications are manually started (because autostart has been switched OFF by the customer or applications are signalled as "present").

In case a proprietary STB menu is presented on screen that kills any running MHP application, the auto start application SHALL be re-loaded after the GUI is closed/disappears. Otherwise the MHP application in auto start mode SHALL be downloaded and started in the background; it SHALL be shown immediately after the proprietary STB menu/GUI is closed/disappears (see §6.4).

---

<sup>13</sup> DVB-HTML is the only well specified HTML profile for TV currently defined by DVB.

### 8.3.2 Interaction between Resident and Downloaded Applications

When a resident application is called by the user or automatically (whether it is an MHP application or a low level manufacturer defined application such as volume level, a list, a set-up menu, etc.) this **SHALL NOT** kill the active loaded MHP application.

Similarly a running resident MHP application **SHALL NOT** be killed by the launch of another resident low level application (see §6.4).

### 8.3.3 SDRAM Memory Management

In case the maximum amount of available SDRAM memory (see # 6.1.3 for minimum memory requirements) is exceeded by the latest started application, the previously loaded and paused MHP applications (if any) **SHALL** be purged from memory and the latest loaded application **SHALL** be given priority.

In case an MHP application in auto start mode is already loaded in memory, this application **SHALL** never be automatically purged from SDRAM memory.

### 8.3.4 Receiver properties

In real-life operation, especially in horizontal markets like Italy (but not necessarily only there), the population of receivers reached by MHP applications is far than homogeneous. Different receiver models and different software versions (for whatsoever reason) of the same receiver model receive in a give area at a certain point in time the same MHP application.

There could be situations, like functional limitations or bugs in a particular model and/or software release, where an MHP application should behave differently when executing on a particular receiver model with a specific software version.

Even though java system properties supposedly exposed by receivers through MHP's System.getProperty() method would be useful for this purpose

- 1) they're not necessarily present in any receiver model
- 2) the number and type of properties is different for each receiver model
- 3) the name of the same property (e.g. software version) is different for each receiver model

For the above reasons it's **MANDATORY** exposing through MHP's System.getProperty(), both to signed and unsigned applications, at least the following receiver characteristics (in parenthesis the recommended property name)

- manufacturer name (system.hw.manufacturer)
- hardware release (system.hw.version)
- model name (system.hw.model)
- software release (system.sw.version)
- loader release (system.loader.version)
- receiver type (system.hw.type="TV" for iDTVs)

### 8.3.5 Behaviour with mixed SD/HD applications

*It can be envisaged that the following kind of applications will be on-air at the same time on different services:*

1. Native HD (16:9) applications associated to HD services
2. Legacy SD (4:3) applications associated to SD (16:9) services
3. Legacy SD (4:3) applications associated to HD simulcast of SD services

*By exposing/implementing the relevant properties/methods mandated by the standard (e.g. `dvb.display.aspect_ratio`), an HD receiver will allow "well-designed" applications to*

optimize their behaviour in any of the above cases. Scaling of legacy SD applications to high definition graphics resolution, if required by current TV settings, SHALL be performed by the receiver itself.

## 8.4 Application Environment(s) for broadband media delivery

### 8.4.1 Procedural Application Environment

The Procedural Application Environment (PAE) SHALL be implemented according to the specifications defined above in §8.3 with the clarifications, extensions and restrictions defined in the corresponding clauses below.

#### 8.4.1.1 APIs for Streamed CoD

In addition to what is specified in Section 11.11.12 of [21] the following classes SHALL support the HTTP protocol:

- The constructor for `javax.media.MediaLocator` - for referencing media files intended to be played while downloading
- Methods on `javax.media.Manager` accepting `javax.media.MediaLocator` as input parameters - for constructing JMF players for media files intended to be played while downloading.

Implementations SHALL support also custom player creation by applications through a custom `DataSource` (`javax.media.protocol.DataSource`) and a `SourceStream` (`javax.media.protocol.SourceStream`).

When creating a JMF player, Locators and URLs which reference files whose MIME-types have been defined in Table 5 will create a player which will play the content while downloading it. If the content cannot be found then such players will never enter the Prefetched state.

Implementations will rely upon MIME-types returned by the server in HTTP responses to determine the container of the content being streamed or downloaded, according to the values listed in Table 5. In case of missing MIME-type, implementations will do their best to tell the container format from the file itself. In the case of "Download CoD," MIME-types will be stored elsewhere to be used when consuming downloaded media contents. If the container format cannot be determined then such players will never enter the Prefetched state.

The following controls SHALL be supported for the above mentioned players:

- `javax.media.CachingControl` and its associated `javax.media.CachingControlEvent`
- `org.davic.media.LanguageControl`
- `org.davic.media.AudioLanguageControl`
- `org.davic.media.SubtitlingLanguageControl`
- `javax.media.setRate`
- `javax.tv.media.MediaSelectControl`
- `javax.tv.media.AWTVideoSizeControl`
- `org.dvb.media.VideoPresentationControl`
- `org.dvb.media.BackgroundVideoPresentationControl`
- `org.dvb.media.SubtitlingEventControl`
- `org.dvb.media.VideoFormatControl`
- `org.dvb.media.DVBMediaSelectControl`
- `org.davic.media.MediaTimePositionControl`

The clock rates (0.0) and (1.0) SHALL be supported for the `javax.media.setRate` control. Any other rate is OPTIONAL.

#### 8.4.1.1.1 Player operations

Typical operations associated with playing of progressive download contents will be performed using the following APIs:

- **PLAY - STOP:**
  - `javax.media.Player.start()` and `javax.media.Player.stop()`
- **PAUSE - RESUME:**
  - `javax.media.setRate(0.0)` and `javax.media.setRate(1.0)`
- **SEEK:**
  - `javax.media.Player.setMediaTime()` or `org.davic.media.MediaTimePositionControl.setMediaTimePosition()`
- **BUFFERING STATUS – DOWNLOAD RATE:**
  - `javax.media.CachingControl.getContentProgress()` and `javax.media.CachingControlEvents.getContentProgress()`
- **SKIP:**
  - `javax.media.Player.getMediaTime()` or `org.davic.media.MediaTimePositionControl.getMediaTimePosition()` then `javax.media.Player.setMediaTime()` or `org.davic.media.MediaTimePositionControl.setMediaTimePosition()`
- **CONTENT DURATION/LENGTH:**
  - `javax.media.Player.getDuration()` or `javax.media.CachingControl.getContentLength()`

#### 8.4.1.1.2 Time-setting operations

When the middleware implements the player created with the `MediaLocator` pointing to a HTTP URL, the methods involved in changing the current media time, i.e. `javax.media.Player.setMediaTime()` and `org.davic.media.MediaTimePositionControl.setMediaTimePosition()`, will use the HTTP Range header to achieve the result expected by applications, transparently to the applications themselves. After the player has successfully retrieved the part of the file containing the indicated media-time and the player has re-entered the Started state a `javax.media.MediaTimeSetEvent` will be generated. Implementations will handle the possible lack of HTTP Range header support on server side by not stopping the player and not generating the `javax.media.MediaTimeSetEvent`.

In case of MP4 files, implementations will best match time values passed to the above mentioned methods to the random access points defined in those files.

In case of MPEG-2 TS and audio-only files, implementations will do their best to set meaningful time values based on the stream itself (e.g. by treating all media just as if they were fixed rate).

#### 8.4.1.2 APIs for Download CoD

If content download is supported, the “Content download API” specified by OIPF (clause 11.3.4 and Annex E in [44]) SHALL be implemented.



The content access descriptor therein specified is required only if a DAE is present in the receiver.

#### **8.4.2 Declarative Application Environment**

Support of full-blown (advanced) web clients is *OPTIONAL*. When available, it will be achieved through MHP1.1.3@Internet Access Profile [21].

### **8.5 Resident applications related to broadband media delivery**

#### **8.5.1 History**

The resident navigator *SHOULD* provide a feature allowing users to browse the list of most recently used broadband applications, i.e. applications which are transported via interaction channel (Section 10.8.1.3 in [21]), and to possibly select one.

Only broadband applications signalled by broadcasters as visible to users (*visibility='11'* in AIT's Application descriptor) *SHALL* be stored for history purpose.

#### **8.5.2 Bookmarks**

A specific key on the remote control *SHOULD* be available for storing a bookmark to the current broadband application. In conjunction with such key, the resident navigator will provide a feature allowing users to browse the list of bookmarks and to possibly select one.

Only applications signalled by broadcasters as visible to users (*visibility='11'* in AIT's Application descriptor) *SHALL* be stored for bookmark purpose.

### **8.6 Maintenance and Upgrade**

It is very important for the receiver to be able of automatically and regularly look for available software upgrades and to automatically load and install such new software.

The procedure must be designed to guarantee both the manufacturers and the broadcasters that over-the-air software upgrades are received and automatically installed on the receiver in the households. This will also make the viewers sure that their receivers are always updated and fully compliant with the applications on air.

The process of upgrading *SHALL* cause minimal disruption to the viewer. However, to minimise the diversity of deployed software builds and to most efficiently use the available broadcast capacity, the receiver must detect and act upon the broadcast of the relevant software download.

After a System Software Update has been performed, user settings like services listings (preferred, etc.) *SHALL* be preserved, whenever feasible.

Obviously, the viewer has also to be able to perform a manual search for software upgrades in any moment. Further, the viewer has to be allowed to disable the automatic software upgrade procedure.

#### **8.6.1 Automatic software upgrade**

To allow for a simple user interaction, the receiver *SHALL* behave in the following manner:

1. The receiver has to automatically look for available software upgrades over the air.
2. The automatic software upgrade procedure can be disabled by the user,.
3. When the receiver looks for available software upgrades, it has to scan all the multiplexes.

4. The software upgrades put over the air need to be model specific so that there is no chance that a software intended for a particular receiver model can be downloaded and installed on a receiver with a model different from that to which the software upgrade was intended, as specified in DVB TS 102 006 [19].
5. If any new software version is found, it will be automatically downloaded, but SHOULD only be installed after explicit confirmation by the user (manufacturer option).
6. The automatic software upgrade can be performed both in stand-by mode (MANDATORY) and optionally in operate mode (at a specified hour and with a specified frequency). Refer to the following table for automatic channel scan default settings.
7. If the “automatic software update in operate mode” option is available and set to YES, then:
  - at a specified time and with a specified frequency, the receiver has to search for new software, notwithstanding if the receiver is on or in stand-by mode;
  - at the time the procedure is started, a 30 seconds countdown will appear on screen with the following message: “The receiver will start looking for new software in ... seconds”. Italian translation: “Il Box Interattivo comincerà la ricerca d’aggiornamenti software entro ... secondi”.
  - The user will be able to press “OK” for letting the procedure start immediately or “exit” for aborting the procedure. In case the user will choose “exit”, the procedure will be aborted and will not be performed again until the next scheduled time.
  - When new software has been installed, then (after the receiver has been automatically rebooted, if necessary) a message SHALL appear on screen: “Your receiver was successfully upgraded. New features are now available.” (Italian Translation: “Il Box interattivo è stato aggiornato. Nuove funzionalità sono state aggiunte”). A further message could be displayed, briefly describing what functionalities were added to the receiver. This message is up to the manufacturer and is intended for informing the user on what features were added on the receiver. This additional message is not mandatory, but it is strongly RECOMMENDED. This message will even contain the manufacturer’s call centre telephone number (if any) or, at least, a web site where finding the description of such new functionalities.
  - If new software is found and installed the message described above SHOULD be displayed and the automatic channel list updating procedure SHOULD be skipped. It is absolutely MANDATORY that the message described above is seen by the viewer.
  - The message will stay on the screen until the viewer presses the OK key.
  - It is strongly RECOMMENDED that, within the receiver menu, a section is provided for describing the new features of the last downloaded software.
8. If the "automatic software update in operate mode" option is available and set to "NO" (or the operation was aborted), then the procedure as described in the previous point SHALL be performed 45 minutes after the receiver has been switched to stand-by mode (obviously only if the “automatic software upgrade in stand-by mode” option is set to “YES”). If new software is found and installed, the same message as described in the previous point SHALL be displayed when the receiver is switched on. In case the receiver is put in stand-by mode more than once a day, the procedure has to be performed only once.

N.	Settings / Italian Translation	Mandatory default settings
1	“Automatic software upgrade in stand-by” / “Aggiornamento automatico del software con Televisore in stand-by”.	YES / SI

N.	Settings / Italian Translation	Mandatory default settings
2	“Automatic software upgrade in operate mode” / “Aggiornamento automatico del software con Televisore acceso”.	YES / SI (if available)
3	“Time” / “Ora”	<b>04:00 AM</b>
4	“Frequency” / “Frequenza”	“Daily” / “Quotidiana” = default (“Weekly” / “Settimanale” – other option possibile)

Table 35: Default settings for auto software upgrade

### 8.6.2 Over The Air Software Update

The manufacturers SHALL implement the DVB System Software Update (DVB-SSU) as defined in [20], using the Simple Profile of DVB Data Downloading as defined in [19]. The receiver SHALL be able to find out its own DVB-SSU files without relying on the relevant linkage\_descriptor in NIT or BAT.

In order to find out its own DVB-SSU files, if any, the receiver SHALL follow the relevant linkage\_descriptor (linkage\_type 0x09) found in Home Channel(s)’s NIT<sub>actual</sub>. As only the “generic” OUI (Organizationally Unique Identifier) value reserved to DVB (0x00015A) will be used in linkage\_descriptor’s private data bytes, receivers SHALL be able to recognize their own DVB-SSU files, if any, by the standard data carousel itself.

In order to optimize overall system resources against a multitude of different receivers, support of DVB-SSU Enhanced Profile, based on UNT (Update Notification Table), is RECOMMENDED.

Manufacturers SHALL provide appropriate recovery measures to cope with possible receiver failure or hang-up during the OTA update.

#### 8.6.2.1 Recommendations for SSU operation

The receiver SHALL be able to acquire a software update with a minimum speed of 64 kbit/s, in marginal reception conditions. Software update speed will not exceed 512kbit/s.

*For this reason it’s highly RECOMMENDED to keep OTA update size as little as possible. That’s particularly true for those receivers based on HD chipsets which rely upon programmable digital signal processing architectures for audio and/or video decoding. The nice feature of possibly fixing/upgrading audio/video codecs even in the field they allow SHOULD be rarely used. It’s then strongly RECOMMENDED to organize receiver’s software in such a manner that an OTA update can include or not audio/video decoding firmware.*

*Page intentionally left blank*

---

## 9 Smart cards and Security

### 9.1 Smart Cards

Smart cards may be used both for CA and non-CA applications (T-government, T-banking, loyalty cards, ...).

#### 9.1.1 Conditional Access

Based on both CA providers and manufactures willingness, Conditional Access System selected by a platform for restricting access, completely or partially, to platform's contents could be either embedded in the receiver or implemented in a Conditional Access Module (CAM) plugged in a Common Interface (CI) slot.

In this latter case, if a CAM is provided with the digital receiver (e.g. in case of iDTV), the CAM provider and the digital receiver provider guarantee the coexistence of more CA systems in the same manner as embedded CA system(s). The CAM provider and the iDTV vendor guarantee the same security level as for CAS embedded.

In any case, the receiver SHALL ensure the coexistence of more CA systems while maintaining and even improving the security of the receiver as a whole.

Stand-alone receivers (STB) SHALL have at least two (embedded) smart card readers. One or more Common Interface (CI) slots may be optionally present.

##### 9.1.1.1 Embedded CA(s)

In this case at least one smart card interface conforming to the ISO 7816 standard, levels 1 to 3 (with T=0 and T=1), SHALL be available.

To improve interoperability and interactions of applications with embedded CA(s), DGTVi has specified a set of CA API Extensions for MHP which are already widely implemented on receivers deployed in Italy. These extensions have been submitted to DVB which on their basis have developed the "Content Purchasing API" MHP extension [33]. Such extension is a backward compatible superset of the original DGTVi specification. DGTVi provides the specification for free to any interested party.

##### 9.1.1.2 Common Interface

If the receiver implements the Common Interface Version 1 (Clv1) then it SHALL respect in full EN 50221, the extensions defined in TS 101 699 and the implementation guidelines.

*For HDTV services support of the Clv1 extensions [30] specified by the CI+ Forum is MANDATORY.*

Even though in this document CI is introduced in the context of Conditional Access services, it is duly recognized that CI has been conceived to host also other kinds of expansion modules (e.g. modules providing visual aids to deaf people).

##### 9.1.1.2.1 Physical presentation of the smart card to the reader

The Common Interface Connector and the Module SHOULD be implemented in such a way that the smart card SHOULD be inserted with the contact area facing upwards when horizontal. For other implementations manufacturers are invited to check with the platform's operator(s) to ascertain how they intend to implement their modules.

### 9.1.1.2.2 Clv1 host requirements

The following requirements on the CI Host (receiver) features define the platform's Clv1 profile, i.e. the minimum common host functionality set required by the platform:

- The host supports the High Level MMI Interface as specified in [12]
- The host, in the main menu, includes a CAM defined Menu tree.
- The host supports MMI Pop-ups.
- The following requirements apply to MMI pop-ups and CAM menus:
  - at least 5 lines SHALL be displayed simultaneously
  - in case of pop-ups/menus composed by more than 5 lines the display SHALL support scrolling.
  - at least 50 characters SHALL be displayed for each line
- MMI pop-ups SHALL have control of the Remote Control keys selected by the user until he/she exits the MMI itself.
- RC key supported by the MMI SHALL be:
  - Numeric keys
  - UP, DOWN, LEFT, RIGHT arrow keys
  - OK key
  - Back/Exit key(s)
- In case a System RC Key (P+, P-, Menu, List, ...) is selected by the customer while a pop-up message is displayed, the host SHALL close the popup and perform the related system action.
- Should the host find out that more than one device supports the CA(s) (e.g. embedded CA, CI port 1, CI port 2) associated to the tuned service, it SHALL select the active (descrambling) device according to the following priorities:
  - Embedded CA connected with a compatible SC
  - CAM on CI 1 connected with a compatible SC
  - CAM on CI 2 connected with a compatible SC
  - ....
  - Compatible Embedded CA without a valid SC
  - Compatible CAM on CI 1 not connected with a compatible SC
  - Compatible CAM on CI 2 not connected with a compatible SC
  - ....
  - Non-compatible CAM empty CI slot 1
  - Non-compatible CAM empty CI slot 2
  - ....
- During the Channel scanning procedure all the channels found SHALL be stored by the device independently from the channel scrambling status.
- The host remains on the last tuned frequency after entering in the main menu

- MMI pop-up SHALL have higher video priority than the downloaded MHP
- MMI pop-up owns the control of the remote control keys

It should be noted that some broadcasters might want to make use of the optional Authentication feature of this standard (see Annex B.1 of the standard). Manufacturers are invited to consult with the broadcasters prior to claiming compatibility with services conditionally accessed through a Common Interface compatible module.

Some recurrent Clv1 interoperability issues are reported in Annex G.

#### **9.1.1.2.3 CI+ host requirements**

For HDTV services support of the Clv1 security extensions [30] specified by the CI+ Forum is MANDATORY.

Aforementioned CA API extensions SHALL also be supported in the context of CI+. Mapping of such API on CI+ is specified in [30] Annex M.

When a scrambled service is tuned the following scenarios can be envisaged:

1) no CICAM inserted: embedded GUI takes control, MHP application is (likely) never started

2) CICAM inserted but no CI SAS resource available (i.e. no CA API support at all): MMI takes control. MHP application is started only if/after the service is descrambled (because proper rights are already on the inserted card or because the event has been bought through MMI)

3) CICAM inserted and CI SAS resource available (i.e. CA API support could be available):  
3a) if the service is descrambled (because proper rights are already on the inserted card) then everything will go on like above in case 2). If CA API are implemented on the host side and they are also supported by the CICAM, MHP application(s) associated to service can use them (e.g. to check some information on smart card).

3b) if the service is not descrambled for whatever reason (card not/wrongly inserted, lack of proper rights, ...) and if the application embedded in the CICAM for the CA system used on the tuned service has been written to use MMI, then everything will go on like above in case 2).

3c) if the service is not descrambled for whatever reason (card not/wrongly inserted, lack of proper rights, ...) and if the application embedded in the CICAM for the CA system used on the tuned service has been written to use CA API, then MHP application is started. If a CA API session is not successfully opened within x seconds (e.g. 10s), MMI will take control, MHP application will be paused and things will go on again as in case 2).

#### **9.1.2 Non-CA Services**

For smart card based non-CA services (T-government, T-banking, loyalty cards, ...), the SATSA standard API [27]) introduced in MHP 1.1.2 [21] is required. In particular

- STB receivers are required implementing SATSA
- IDTV receivers are RECOMMENDED implementing SATSA.

As an early adopter of this specification, DGTVi spotted 2 issues within it:

- 1) SATSA doesn't provide any means to handle smart card events (card in/out, card upside-down)
- 2) Even though SATSA would have no fundamental problem playing with non-Java cards and Java cards without an Application ID, like a lot of cards used in Italy are

(e.g. national/regional government service cards), it would actually raise an exception and stop working in presence of them

DGTVi fixed these 2 issues with 2 addenda which can be respectively found in Annexes H and I.

These fixes were submitted to DVB and they were incorporated in MHP release 1.1.2.

Since MHP 1.1.3 [21] a cleaner fix for issue 1) has been provided by DVB through the new `org.dvb.smartcard` package.

Implementation of either such package or the above addenda in a receiver deeming compliance with smart card based non-CA services is required.

Obviously, smart card based non-CA services require a smart card reader which can come in in any of the following receiver configurations:

A/ One (or more) smart card interface(s) conforming to the ISO 7816 standard, levels 1 to 3 (with T=0 and T=1).

B/ A Common Interface slot populated with a smart card reader module (on iDTVs only).

In case A/, switching between service card and conditional access card SHALL not require re-booting of the receiver or a multi-menu navigation (auto detection and activation of the required protocol is the recommended procedure).

In case B/, the smart card reader SHALL be provided as a default.

## 9.2 MHP Security

- a. The receiver shall implement the MHP security framework as described in # 12 of the MHP specification [21].
- b. The default setting of the receiver shall be MHP Security "ON" (see below).
- c. Performance degradation for signed applications when security is ON shall be minimal.

The recommended procedure for the attribution of (application) signing keys for Italy is to be set out in a specific document.

### 9.2.1 MHP Security Framework Issues

Many receivers of the first (2004) generation took too long to authenticate signed application in the secure mode. Therefore at that time, manufacturers and broadcasters have been constrained to incorrectly implement and use the MHP Security Framework (MSF).

In many cases, access to restricted resources such as the return path is granted to unsigned applications. In a way, the MHP Security Framework has been put in an "OFF" mode. This creates a risk for the end user (e.g. abuse, not necessarily voluntary, by "rogue" applications).

*That applies in particular to applications downloaded over the return channel, as it could be the case with MHP 1.1.3. For this reason, a receiver SHALL accept applications from the return channel only over secure (HTTPS) connections with server authentication. The root certificate(s) used by the receiver to authenticate the server will be provided over the air.*

Implementation of the MHP Security Framework is required, as it is mandatory per the MHP specification. The Security Framework shall be maintained for the extended APIs used in the Italian profile (e.g. non-CA Smart Card API, see [21] Annex A1).



## 10 Accessories and Setup

Receivers must be both easy to install and use. An existing viewer of analogue services needs to be able to complete a basic digital installation, i.e. just for viewing, using only what has been supplied with the receiver. In addition, on-screen information must be provided in a clear and consistent manner both to aid installation and (if required) to enable an easy dialogue with any support staff, e.g. call-centre

### 10.1 Receiver Accessories

The manual SHOULD contain at least the following information:

1. Advice on the verification and eventual adaptation of reception equipment
2. The modes of connection of other peripheral appliances (TV, VCR, DVD, other STB)
3. Mode of connection to the telephone system (If applicable)
4. Set up and tuning of the receiver
5. Description of the functions of the remote control keys
6. Options and accessories (e.g. Infra-red Keyboard, etc...)
7. Troubleshooting
8. Information on a call centre number to resolve connection problems.

Accessory	Presence
1 Power Cable	Mandatory
Handbook in Italian language	Mandatory

Table 36: Accessories

### 10.2 Power Supply / Voltage

220V a/c + 15%; 50 + 2 Hz

Low Voltage recommendation 73/23/CEE e 93/68/CEE. Law n° 971/1977

*Page intentionally left blank*

## 11 Default settings

The following is a list of the overall default settings of the receiver. These requirements are intended to provide to all receivers on the market a very similar behaviour when they are installed or restored to factory defaults.

Those strictly related to broadcasters' services and applications (Application Autostart, Parental Control, Automatic OTA Update, Automatic Channel Update) SHALL be compliant with the table below. The rest should be considered by manufacturers just as a suggestion.

Feature	Specification	Status	Note
<b>Auto-start Application</b>	Default option (if any) SHALL be "YES"	Mandatory	When application autostart is ON, progress loading bars or other icons SHALL NOT be displayed while applications signalled as "autostart" are being loaded or started. Such icons SHALL instead be displayed in case applications are manually started (because autostart has been switched OFF by the customer or applications are signalled as "present").
<b>Present and Next banner</b>			
• Duration	Less or equal to 4 sec.	Mandatory	
• Current Time	Active	Optional	
• Channel number	Active	Mandatory	
• Service name	Active	Mandatory	Long "channel name" label
• Volume indicator	Active	Optional	If the receiver allows to locally control volume, the volume bar SHALL be present
<b>Country</b>			
	As per after the first installation	Mandatory	After first installation the default country SHALL be Italy
<b>Language options</b>			
• Language	As per after the first installation	Mandatory	After first installation the default language SHALL be Italian
• Primary Audio	As per after the first installation	Mandatory	
• Subtitles	Not Active	Mandatory	
• Primary Subtitles language	As per after the first installation	Mandatory	
<b>Automatic Channel Numbering</b>			
	Active	Mandatory	This is a toggle active/inactive

Feature	Specification	Status	Note
<b>TV settings</b>			
• Screen Format	16:9	Mandatory	
• HDMI output format	As per after the first installation	Mandatory	
• TV SCART output	RGB	Mandatory	
• VCR SCART output	CVBS	Mandatory	when available
<b>Parental Control settings</b>			
PIN protected events	PIN SHALL be asked for any event with rating value equal or greater than 18 years in EIT's Parental_rating_descriptor	Mandatory	
<b>Automatic software upgrade</b>			
In Stand-by mode	Active*	Mandatory	
In Operate mode	Active*	Optional	
Time	4:00 am	Mandatory	
Repetition	Daily	Mandatory	
<b>Automatic channel list update</b>			
..in Stand-by mode	Active	Recommended	
..in Operate mode	Not Active	Optional	
Time	4:30 am	Mandatory	
Repetition	Daily	Mandatory	
<b>Dolby Digital</b>	De-activated	Optional	
<b>Return Channel Access Control</b>	ON, level b.) (see D-Book,# 8.2.2.2)	Mandatory in case of presence of return channel	End-user confirmation of authorization to access return channel, for each new session

Table 37: Default settings summary table

\* The automatic software upgrade SHALL be ON to avoid users missing the necessary upgrades. However, if an automatic upgrade feature is present, this must be clearly indicated to the user so that, at set up, he/she may choose to deactivate it. In that case, the information on availability of new software for the receiver SHALL be presented to the user.

## **Annexes**

*Page intentionally left blank*

## A. Home Channel concept and Tivusat implementation

### A.1 Introduction

For the purpose of accessing and presenting an open platform bouquet in an effective and consistent manner, the “Home Channel” concept has been introduced.

The (Master) Home Channel is a multiplex found at well defined satellite coordinates (frequency, orbital position, ...) which carries key information for tuning and ordering services hosted by the platform. Timing and maintenance information is carried as well by the (Master) Home Channel.

For redundancy reasons, the same information will also be carried by another (Backup) Home Channel.

The receiver will first look for the Master Home Channel. If not found it will revert to the Backup Home Channel.

As a last resort, if neither the Master nor the Backup Home Channel is available, the receiver SHALL provide a means, for experienced users, to manually enter the Home Channel coordinates.

### A.2 Home Channel(s) coordinates

The precise parameters needed for tuning the Tivusat Home Channel (Master or Backup) are given in the following table:

Parameter	Home Channel (Master)	Home Channel (Backup)
Frequency	10992MHz	
Orbital position	13°	
West/East	East	
Polarization	Vertical	
Symbol rate	27.5Mbaud	
Inner FEC	2/3	

Table 38: Home Channel(s) parameters

These parameters SHALL be stored in receiver’s non volatile memory. It SHALL be possible to change these parameters via OTA update.

### A.3 Tuning info

Tivusat relies upon NIT<sub>other</sub> table(s) to convey tuning and channel ordering infos to receivers. Thanks to the satellite\_delivery\_system descriptor(s) carried in all the NIT<sub>other</sub> table(s) found in the Home Channel(s), the receiver will be able to tune all the multiplexes containing one or more services belonging to the Tivusat platform.

## A.4 Service info

Having tuned a multiplex containing one or more services belonging to the Tivusat platform, in order to build its default service list, the receiver will look at LC descriptors carried in any NIT<sub>other</sub> possibly present in the Home Channel(s). Any LCN possibly present in Home Channel(s)'s NIT<sub>actual</sub> SHALL be ignored<sup>14</sup>. No BAT support is required by Tivusat.

Each Tivusat service will then be univocally identified by the following parameters:

- satellite\_delivery\_system descriptor of the hosting multiplex
- original\_network\_id of the associated NIT<sub>other</sub> table
- transport\_stream\_id of the associated NIT<sub>other</sub> table
- service\_id of the associated LCN

## A.5 Timing info

As specified in §7.7.1, Home Channel(s)'s TDT and TOT SHALL be the sole timing reference used by the receiver to align its own timer clock.

Any time the lastly valid Home Channel (Master or Backup), is tuned, either because a service carried therein has been selected by the user or because an automatic check is being performed, the receiver's timer will be forced to get aligned with Home Channel's TDT and TOT information.

## A.6 Maintenance info

Linkage\_descriptor (linkage\_type 0x09) found in Home Channel(s)'s NIT<sub>actual</sub> will link, according to DVB-SSU standard, the receiver to the service which a software update data carousel is possibly associated to.

For Tivusat only the "generic" OUI (Organizationally Unique Identifier) value reserved to DVB (0x00015A) will be used in linkage\_descriptor's private data bytes, so receivers SHALL be able to recognize their own DVB-SSU files, if any, by the standard data carousel itself.

---

<sup>14</sup> LCNs possibly present in Home Channel(s)'s NIT<sub>actual</sub> might in fact refer to the DTT platform (Home Channel used also to feed DTT transmitters).



## B. Remote control

### B.1 The need for specifications

Source : ETSI TR 102 308 V1.1.1 (2004-02) *Technical Report*

**User Group;**

**User interoperability criteria**

- **Specific recommendations for interoperability improvement**

Specific claims for interoperability improvement have been identified in the following areas. Any progress on these issues is expected to improve the user confidence in standardization to ensure interoperability. Such examples can be taken as first implementation areas of the generic recommendations given in clause 6. These specific recommendations provided by particular users are generally supported by the vast majority of them but some of them have slightly different views on some particular ones (e.g. T2, T3, A3, HI).

- **Terminals**

**Rec#T1 Keyboard layout:** The current terminals have different keyboard layout hence hindering easy use and service access. A standardized layout (same or "subset-compatible") should be used for the same service when applicable, particularly for "special" characters, like '+', '\*', '#', etc.

Tactile screens making feasible a customized keyboard layout could help to fulfil this requirement (VHE principle).

When applicable, the pips for blind people should always be on the right places (e.g. number 5).

UNICODE and ES 202 130 [26] should be used as far as possible to cope with the character sets of the various languages.

### B.2 Keys and Key Events

#### B.2.1 The MHP minimum specification

Input event
VK_0 to VK_9
VK_UP
VK_DOWN
VK_LEFT
VK_RIGHT
VK_ENTER
VK_TELETEXT
VK_COLORED_KEY_0
VK_COLORED_KEY_1
VK_COLORED_KEY_2
VK_COLORED_KEY_3

Table 39: Minimum set of input events (G3)

NOTE 1: They are not guaranteed to be available to any one MHP application because another application running at the same time may have one of these events exclusively reserved. The application with focus (if any) always receives all of these events unless another application within the same Service has requested and been granted exclusive access to one or more events. The process for event distribution for DVB-J applications is described in more detail in annex J, “(normative): DVB-J event API” on page 367.

NOTE 2: The user input device for an MHP terminal may support more events than this however this is implementation dependent. If more events than this are supported, it is equally implementation dependent whether the additional events are sent to MHP applications or sent to the MHP navigator. Events which are always sent to the MHP navigator may not be visible at all to MHP applications. For example, an MHP receiver using a conventional remote control will probably have program up/program down keys which are only ever sent to the navigator and cause service selection when received there.

NOTES included in ETSI 101 802

**B.2.2 E-Book ver. 1**

IEC 62216-1: “Digital terrestrial television receivers for the DVB-T system – Part 1: Baseline receiver specification” (E-Book, v.1)

**Remote controllable functions**


Description of the minimal functions of the remote control

Function	Comment
power on/stand-by	
digital keys : 0,1, ..., 9	
Menu	
up, down, right, left arrows	display the television function menu
Validation	validation of the choice
Back	one level back in menu
quit, escape	exit from the menu
Guide	access to the EPG
Information	display the current program information

Table 40: E-Book v.1.9

NB: This specification is no longer present in the E-Book v.1.9 or in the German specification D-Book minimum requirements.

### B.2.3 DTG UK

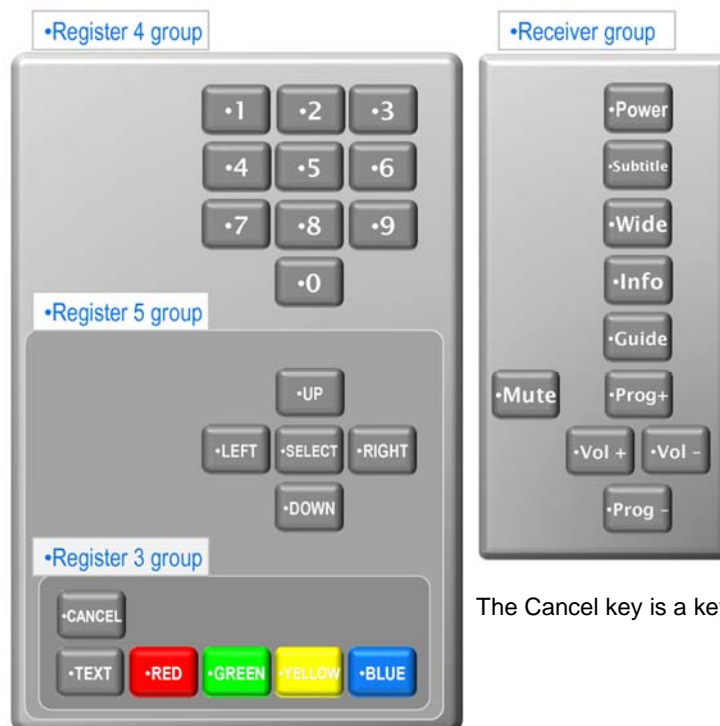

The Cancel key is a key available to applications (programmable)

Figure 7: Remote Control Function Group

### B.2.4 The CEI Specification

Caratteristiche	Specifica tecnica (minima)	
Spaziatura e dislocazione tasti	Tasti critici distanziati	
Tasti colore e sequenza	4 colori, conforme alle specifiche DVB, con l'ordine: rosso, verde, giallo e blu.	
Scrittura di testi alfanumerici tipo GSM	Utilizzo dei tasti alfanumerici da 0 a 9 (tipo cellulare)	
Tasti previsti anche dalla TV analogica	Tasti 'Programma +', 'Programma -'	
	Tasti 'Volume +', 'Volume -', 'Mute'	
	Tasto 'AV' (per input da SCART)	
	Tasto 'Set-Up'	
Tasti aggiuntivi	Tasto 'Info'	Attiva il navigatore
	Tasto 'iTv' o 'Interactive'	Attiva la lista dei servizi disponibili
	Tasti freccia	Pagina precedente/successiva e navigazione all'interno di programmi/servizi
	Tasto 'OK'	Lancio/conferma selezioni e impostazioni
	Tasto 'Exit'	Interruzione/uscita da selezione attiva
	Tasti colore	Scelta delle funzionalità disponibili all'interno dei programmi/servizi del broadcaster
	Tasto 'text'	Visualizzazione teletext qualora la decodifica dello stesso avvenga nel receiver

Table 41: CEI Specification; CT 100, Progetto di Guida

## B.2.5 The NorDig Unified Specification

### B.2.5.1 The Remote Control and Remote Keyboard

#### Basic TV Function

The NorDig IRD's remote control should include the following keys for basic TV functionality. If present, they shall have the following functionality:

- Power on/off – turns the IRD on and off
- Programme up/down – function to switch between programmes
- Volume up/down – function to adjust the volume output level
- TV – function that puts the IRD directly into conventional television state, i.e. only audio, video and subtitling

#### 16.2.3 Digital TV Functions

The NorDig IRD's remote control shall include the following keys for digital TV functions:

- A navigation or pointing system for navigation on the OSD
- OK – a function that selects or confirms current choice or statement
- Multifunctional keys – four colour-coded keys for non-dedicated functions. The colours shall (1) be red, green, yellow and blue
- Back – This function exits from the current menu or “page” and returns to the previous state. (1)
- Text – This function displays the teletext as defined in section 14.1 or a Digital Super Teletext if present. (1)

Note 1: Optional for NorDig I

In addition the NorDig IRD remote control should include the following keys for digital TV functions:

- Navigator – this function starts the “Navigator”, as specified in chapter 13.
- Application – this function signals to the application that the user wants to interact with the default application that is connected to the current event.
- EPG/Guide – this function displays an Electronic Programme Guide.

Table 42: The NorDig Unified Specification; B.2.5.

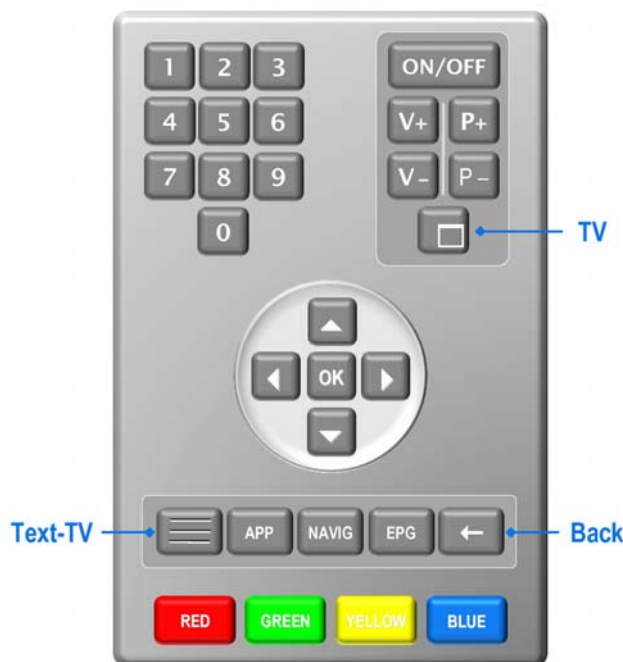


Figure 8: Conceptual illustration of the NorDig IRD remote control (16,1)

Key	KeyEvent
0-9	VK_0 to VK_9
UP	VK_UP
DOWN	VK_DOWN
LEFT	VK_LEFT
RIGHT	VK_RIGHT
OK	VK_ENTER
TEXT	VK_TELETEXT
BACK	VK_F9
EPG	VK_GUIDE
APPLICATION	VK_F1
RED	VK_COLORED_KEY_0
GREEN	VK_COLORED_KEY_1
YELLOW	VK_COLORED_KEY_2
BLUE	VK_COLORED_KEY_3

Table 43: The NorDig IRD Key Events table (par 16,2,5: Mapping of Key Events)

### B.3 Summary of proposals for Undo/Exit keys

Source	Proposal
e-Book v.1	<ul style="list-style-type: none"> <li>• « back » key, with hard wired function [one level back in the menu]</li> <li>• « quit » or « escape » key with hard wired function [exit from the menu]</li> </ul>
e-Book v. 2 (draft)	<ul style="list-style-type: none"> <li>• Nothing specified</li> </ul>
German DVB-T « Wünschliste »	<ul style="list-style-type: none"> <li>• Nothing specified</li> </ul>
D-Book (UK)	<ul style="list-style-type: none"> <li>• « Cancel » key available to application developer</li> </ul>
CEI CT100	<ul style="list-style-type: none"> <li>• « exit » with hardwired function: [interruption of active selection] or [exit from active selection]</li> </ul>
NorDig Unified	<ul style="list-style-type: none"> <li>• « TV » key hardwired [conventional TV state, i.e. video audio and sub-titles]</li> <li>• « back » available to applications [return to the previous state]</li> </ul>

## B.4 Easy TV

### B.4.1 Easy-TV: a research by the ITC, Methodology

**Extensive quantitative research** over 1333 people aged between 13 and 94 years (mean age = 53 years; S.D. = 19.07; 30 cases with exact age data missing). A **questionnaire of 118 items** was submitted to these people in order to identify and quantify clusters of users and attitude toward technology.

**Practical trial** over 40 people recruited according to the clusters emerged from first phase analysis. The method chosen was **paired comparison**.

**In depth interviews** completed the research and collected verbalizations of trial participants. The method chosen was **focus group**.

#### ***B.4.2 Easy-TV: Most common issues with the remote control***

**First**, the remote control can be difficult to handle if the keys are:

- too small,
- wrongly shaped,
- narrowly spaced,
- poorly located,
- hard to see against the background, especially in terms of colour and contrast.

**Second**, it can be difficult to find the right key to press due to:

- excessive number of keys,
- the labelling rubbing off,
- inconsistent use of terminology,
- confusing symbols,
- the need for complex sequences of key presses for simple functions.

## C. Additional optional feature for mobile interaction channel

Feature	Specification	Comment
Multi Application Access	Contemporaneous access to the network of multiple applications	
Advanced Messaging	SMS MMS of Video Rich Class with file size > 30 kB Wireless Village Instant Messaging Client POP3 and IMAP4 Compatible Mail Client	
OTA addressability	WAP Push	Can also be used for fully automatic configuration. See Annex
SIM Application Toolkit	Full support, including Bearer Independent Protocol (optional "class e" in the specification)	
J2ME	Support of MIDP 2.0 applications Support of Socket http, https and autostart of Midlets	
SIM-J2ME Dialogue	Through APDU	Cf. JSR 177 [25]
Micro Browser	WAP 2.0, or http	
Multimedia Object Download		For applications, games, images, video
DRM Agent	Following OMA specification, with handling of the following protected objects Forward Lock Combined Delivery Separate Delivery	
Video Player	3 GPP encoded content MPEG4-10 encoded content	
Memory Card Slot	Secure Digital Multimedia Memory Card (SD/MMC)	To exchange data with radio mobile terminals

Table 44: Optional features for mobile interaction channel

*Page intentionally left blank*



---

## D. GPRS Interaction Channel: Local Configuration procedures

### D.1 Basic conditions to fulfil

- The solution must open, i.e.
- shall not be proprietary to a specific phone operator or a specific broadcaster
- shall not prevent a user from changing phone operator or broadcast platform
- must be independent of the broadcast platform (satellite or terrestrial)
- Manufacturers will look at compatibility with the operational rules based on GSM/GPRS ETSI/3GPP specs, of all (European)
- Mobile phone operators
- Broadcast network operators/platforms
- The same approach should be applied to STB with EDGE or UMTS return channel, when available.
- Closed platform operators (e.g. pay TV) will want to be able to choose/install only their specific phone operator.

### D.2 The configuration data

- Messaging service center
- To send SMS, as a mobile number, e.g. « +39 335 960 9600 »
- Short number
- To send messages to service center, e.g. « 44123 »
- Configuration string
- Alphanumerical, e.g. « AT+cgdcont=1,"IP","APN","0.0.0.0",0,0; »
- Dial up
- GPRS number, e.g. « \*99# or \*99\*\*\*CID# »
- APN
- Alpha, e.g. « dvb.tim.it»
- Phone N° of SIM card
- Normally same as below
- Log on
- Usually phone n° of SIM card <sup>(15)</sup>
- Password
- 6 to 8 n°, user specific <sup>(16)</sup>

### D.3 Configuration Procedures

- 3 possible procedures have been identified:
- Manual Configuration by Menu
- User enters all necessary data
- Mobile over the air (OTA) assisted configuration
- User only enters the (short) numbers for the messaging center and the service center
- Broadcast assisted configuration through an MHP application
- User selects the mobile link provider from a menu.

---

<sup>15</sup> this field could be also set to " void "

<sup>16</sup> this field could be also set to " void "

- In the following diagrams, fields in  have to be filled in by User, fields in  are auto-filled.
- User will also need a feed-back on signal strength to identify connection issues.

### D.4 Configuration by menu

- Minimum necessary for an open system
- Need some form of virtual keyboard, or advanced remote control, for alpha numericals
- Data insertion is error prone
- Access to this menu must be lockable for e.g. pay-tv platform operators
- Extra data needed for EDGE and UMTS

GPRS configuration menu	
STB phone n°:.....	
Messaging center:.....	
Service center:.....	
Configuration:.....	
Dial up:.....	
APN:.....	
Logon:.....	
Password:.....	
Signal strength	

Figure 9: Typical manual configuration menu

### D.5 OTA Assisted configuration

OTA refers to OTA capability via the GSM/GPRS link

- Requires OTA capability by the STB, which is not available on all GSM/GPRS implementations
- Might limit the number of chip makers able to provide one chip STB with integrated GPRS functionality
- All (European) phone operators use the same standard (3GPP/OMA) for OTA procedures



GPRS configuration menu	
STB phone n°:.....	
Messaging center:.....	
Service center:.....	
Configuration:.....	
Dial up:.....	
APN:.....	
Logon:.....	
Password:.....	
Signal strength	

Figure 10: Typical OTA Configuration Menu

### D.6 OTA Configuration Flow

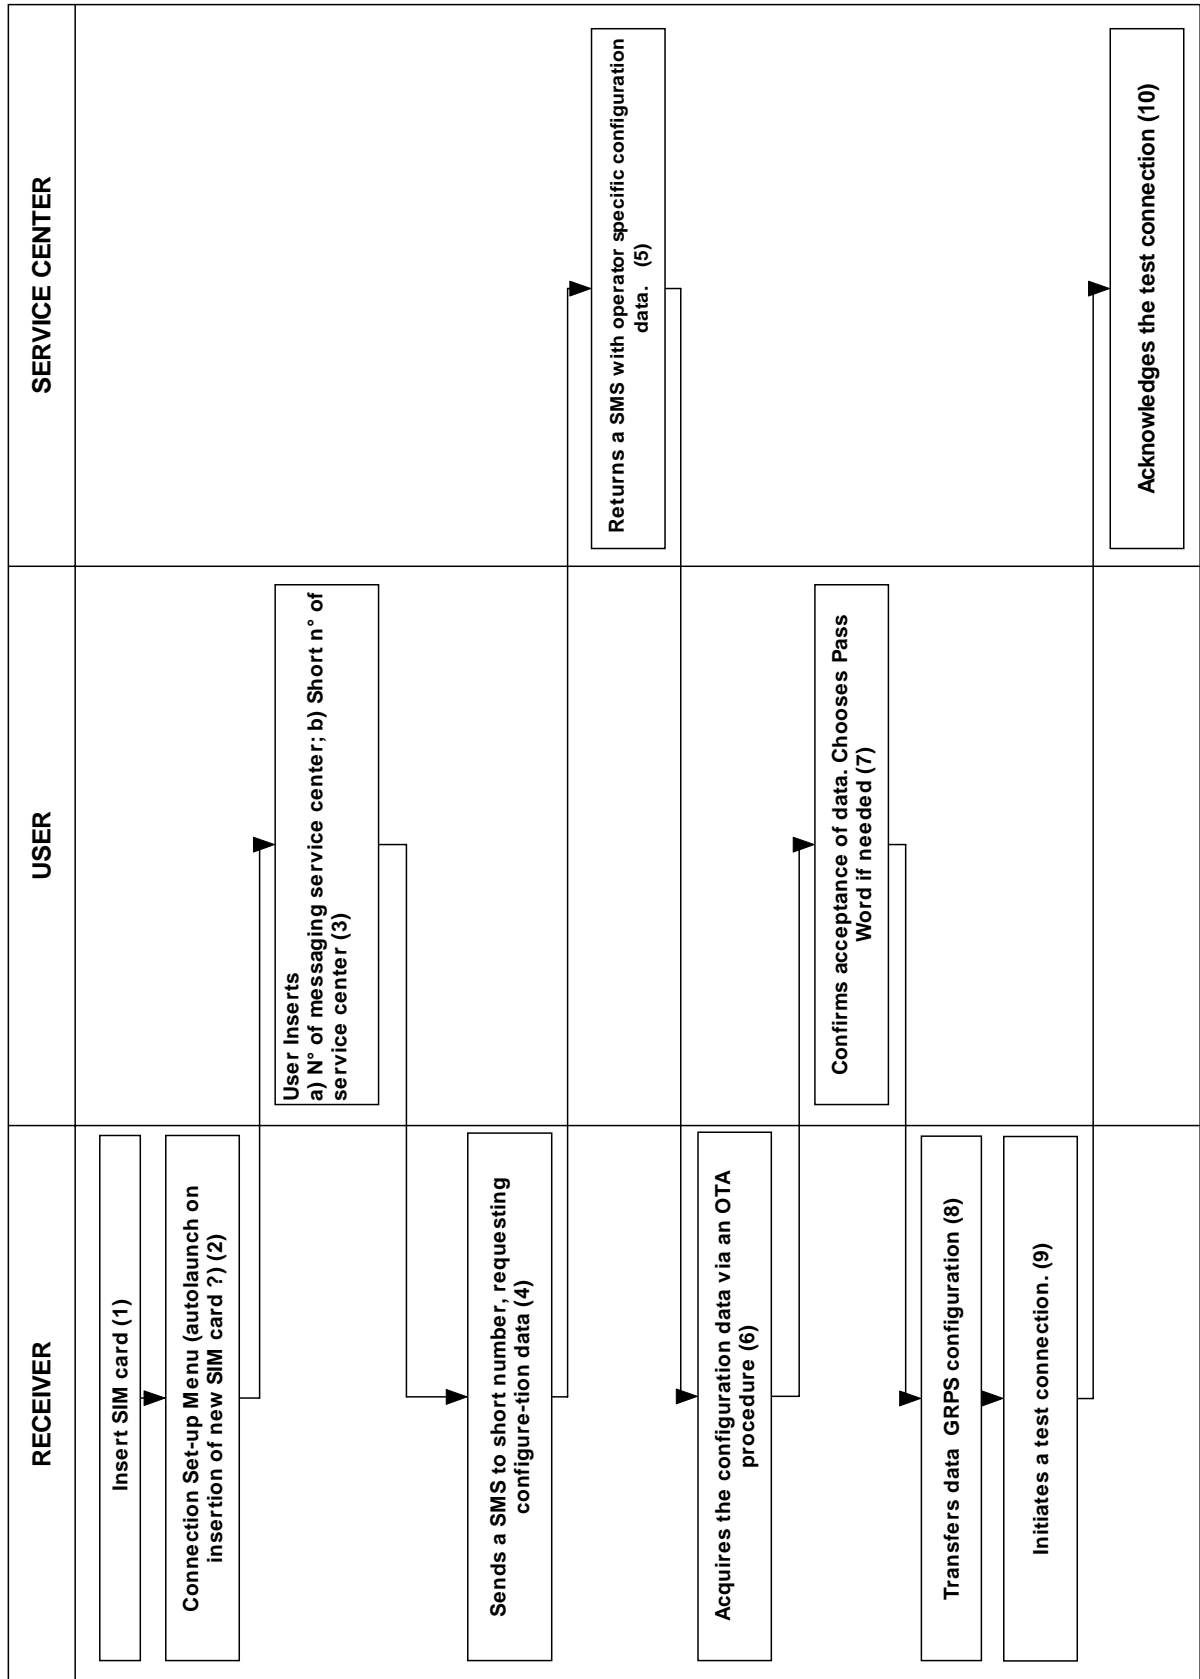

### D.7 MHP Automatic Configuration

- Configuration is MHP application driven
- MHP engine and the SIM must be able to communicate
- Data for mobile operators offering STB service must be on air
- Application and data must be accessible for all STB receiving at least one digital mux
- Application and data must be very low bit rate (cost issue)


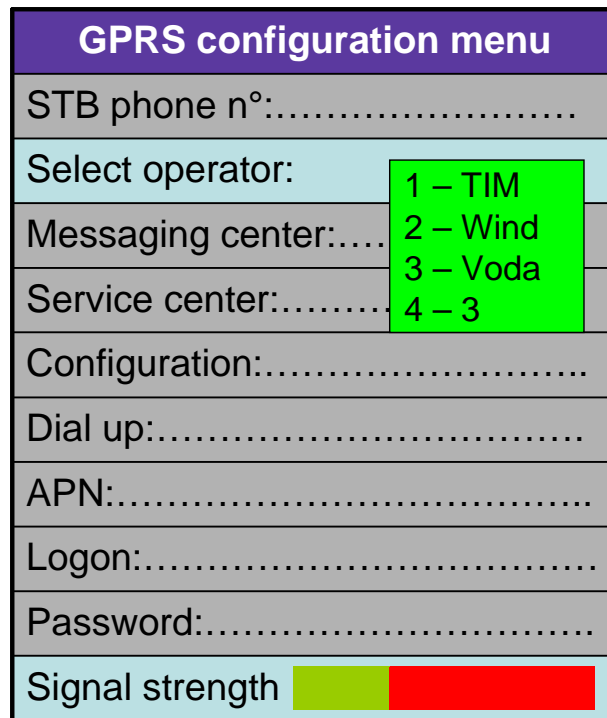


Figure 11: Typical Automatic Configuration Menu

### D.8 MHP Configuration Flow

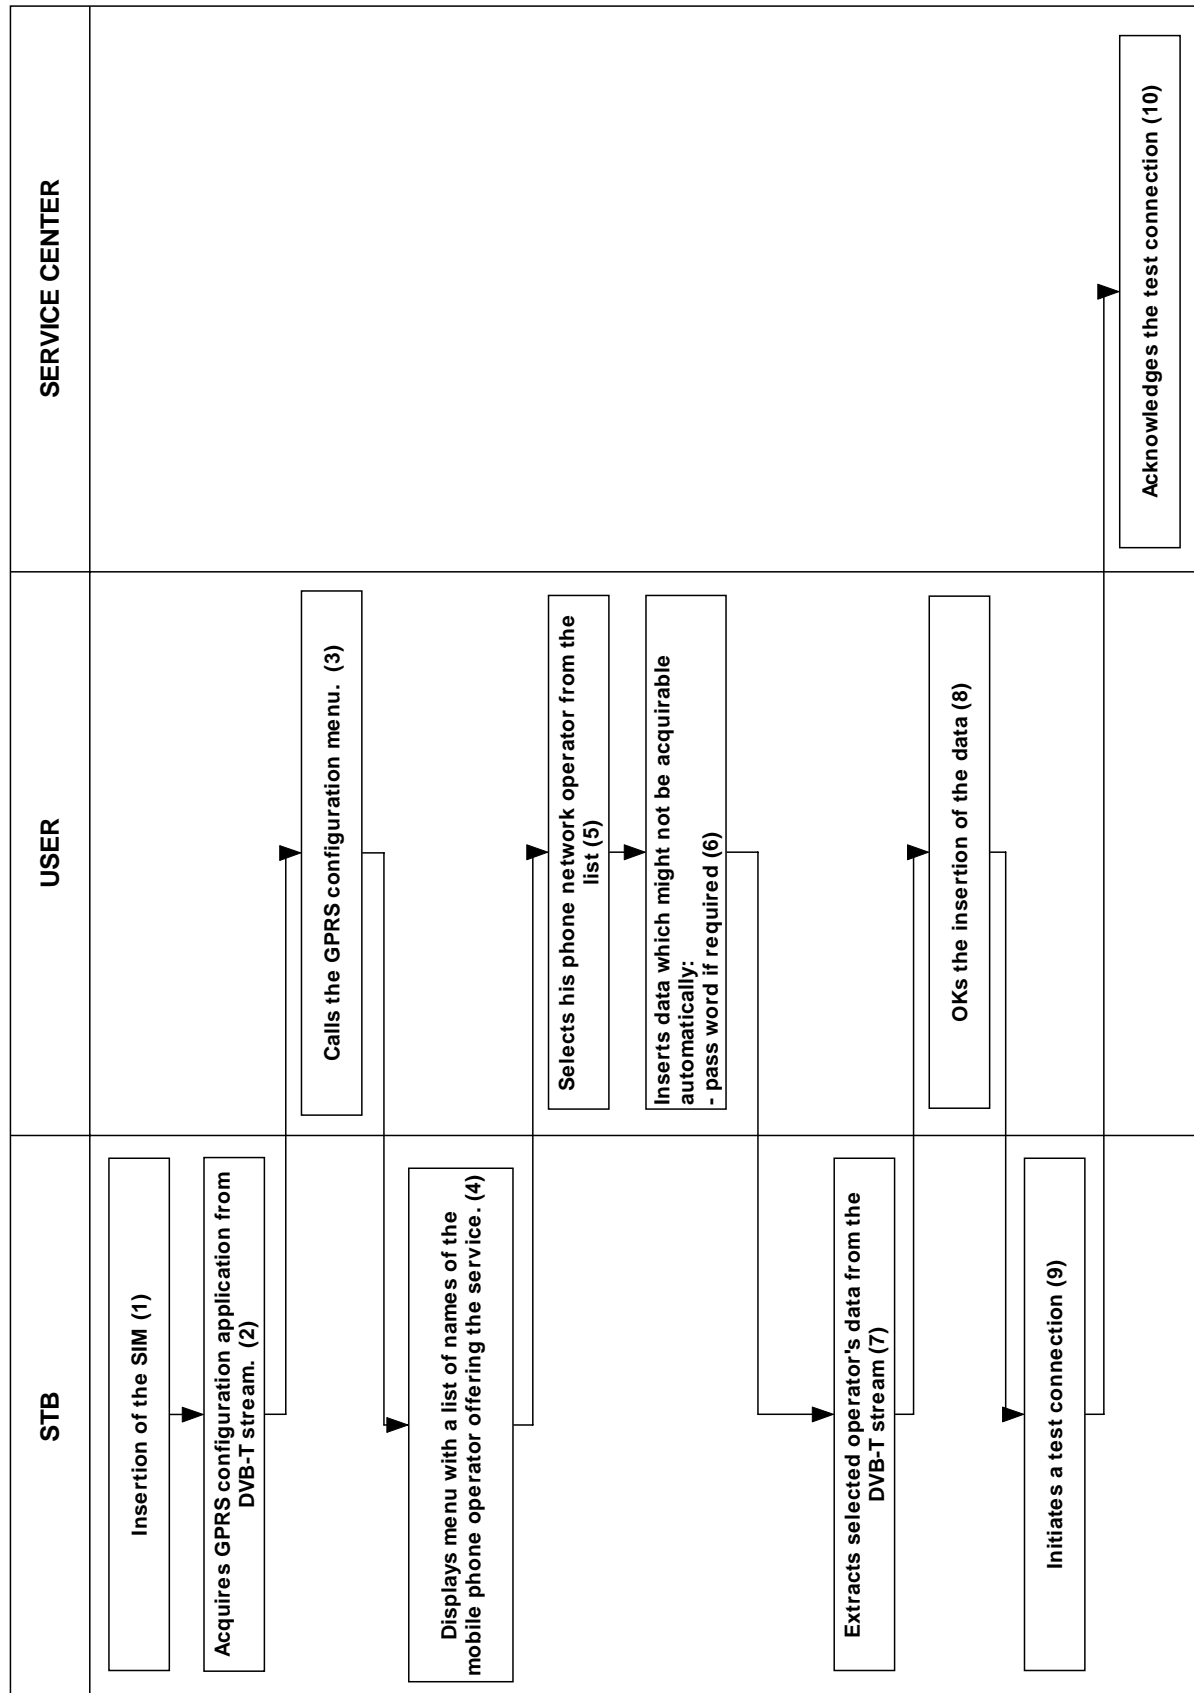

---

## E. Text entry sample class

(the most important items are in bold)

```
import java.awt.event.*;
import org.dvb.ui.*;
import org.dvb.event.*;
import org.havi.ui.*;
import org.havi.ui.event.*;
import org.davic.resources.*;
import javax.tv.xlet.*;
public class HSinglelineEntryExample implements Xlet, ActionListener, HKeyListener,
UserEventListener, FocusListener, ResourceClient {
public synchronized void initXlet(XletContext context) {
}
public synchronized void pauseXlet() {
}
public synchronized void destroyXlet(boolean flag) {
}
public synchronized void startXlet() {
// .....
textField = new HSinglelineEntry();
textField.addFocusListener(this);
textField.addKeyListener(this);
//.....
repository = new UserEventRepository("Keys");
repository.addKey(KeyEvent.VK_F9);
// .....
addUserEvent();
}
synchronized void addUserEvent() {
if (!eventRegistered) {
System.out.println("Add user event\n");
EventManager.getInstance().addUserEventListener(
this, this, repository);
eventRegistered = true;
}
}
synchronized void removeUserEvent() {
if (eventRegistered) {
System.out.println("Remove user event\n");
EventManager.getInstance().removeUserEventListener(this);
eventRegistered = false;
}
}
public void actionPerformed(ActionEvent e) {
System.out.println("Action performed\n");
// .....
}
public void userEventReceived(UserEvent e) {
if (e.getType() == HRcEvent.KEY_PRESSED) {
if (e.getCode() == KeyEvent.VK_F9) {
```

```
// .....
}
}
}
public void focusGained(FocusEvent e) {
if (e.getSource() == textField) {
System.out.println("Focus gained\n");
removeUserEvent();
}
}
public void focusLost(FocusEvent e) {
if (e.getSource() == textField) {
// The text field lost focus (e.g. UP/DOWN key is pressed
// in the text field)
// Register VK_F9 again.
System.out.println("Focus lost\n");
addUserEvent();
}
}
public void keyPressed(KeyEvent e) {
System.out.println(" --> " + e.getKeyChar());
if (e.getSource() == textField) {
if (e.getKeyCode() == KeyEvent.VK_F9 &&
textField.getTextContent(0).length() == 0) {
// VK_F9 is pressed when the text field is empty.
// Do the required behavior(pass the focus to parent Component) and add user event again.
textField.getParent().requestFocus();
addUserEvent();
}
}
}
public void keyReleased(KeyEvent e) {
}
public void keyTyped(KeyEvent e) {
}
public void notifyRelease(ResourceProxy proxy) {
}
public void release(ResourceProxy proxy) {
}
public boolean requestRelease(ResourceProxy proxy, Object requestData) {
return false;
}
}
HSinglelineEntry textField;
UserEventRepository repository;
boolean eventRegistered = false;
}
```

Table 45: Text Entry Sample Class



---

## F. EIT schedule compression

### F.1 Introduction

In order to allow efficient transmission of schedule data spanning more than just a couple of days, a private compressed version of EIT schedule tables has been introduced in §7.2.6.3.

### F.2 Compression algorithm

For compressing EIT schedule tables the ZLIB algorithm, as specified in RFC 1950 [45], is applied to the event loop in `event_information_sections`. `Section_length` and `CRC_32` are updated accordingly.

The receiver SHALL support the Deflate compression algorithm as specified in RFC 1951 [47]. The receiver is not required to support other compression algorithms.

*Page intentionally left blank*

## G. Clv1 common interoperability issues

### G.1 Purpose

The purpose of this Annex is to list some recurrent interoperability issues stemming from wrong implementations of DVB-CI and/or PCMCIA standards in receivers and to explain manufacturers how to avoid them.

### G.2 Initialisation

#### G.2.1 Problem description

The host resets the CAM at start-up. The host doesn't wait enough longer and resets the CAM before its initialization has finished.

#### G.2.2 Specification

PCMCIA standard defines in volume 2, section 4.4.6 that the host has to wait 5s that ready signal is set. As a reminder, a specification extract is attached below in italic.

*A card that requires more than 20 ms for internal initialization before access SHALL negate **READY** until it is ready for initial access, a period of time which is not to exceed five seconds following the time at which the **RESET** signal is negated (or if no **RESET** is implemented, **VCC** is stable).*

#### G.2.3 Resolution

Host has to wait 5s before it resets the CAM at start-up.

### G.3 Mandatory resources

#### G.3.1 Problem description

Some hosts don't provide all the expected resources.

#### G.3.2 Specification

It has been defined in R206-001:1998 (§9.1):

*The minimum resources that any DVB-compliant host SHALL provide are all of those described in clause 8 of EN 50221.*

As a reminder, table 57 in EN50221 that list all resources here follows.

Table 57: Resource Identifier values

Resource	class	type	version	resource identifier
Resource Manager	1	1	1	00010041
Application Information	2	1	1	00020041
Conditional Access Support	3	1	1	00030041
Host Control	32	1	1	00200041
Date-Time	36	1	1	00240041
MMI	64	1	1	00400041
Low-Speed Communications	96	see §8.8.1.1	1	0060xxx1
reserved	other values	other values	other values	other values

### **G.3.3 Resolution**

Support all resources listed in table 57.

## **G.4 CA\_PMT in clear**

### **G.4.1 Problem description**

The CA PMT is not sent on a clear service where it could be used by Italian Pay TV operators for parental control purpose.

### **G.4.2 Specification**

DVB-CI specifications defines in Guidelines for Implementation and Use of the Common Interface for DVB Decoder Applications (R206-001:1998) that the host has to send the CA\_PMT object even when the selected program is in the clear. As a reminder, a specification extract is attached below in italic.

*CA\_PMT is sent by the host even when a programme in clear is selected by the user (typically a programme for which there are no CA\_descriptor in the PMT). In this case, the host SHALL issue a CA\_PMT without any CA\_descriptors (i.e : CA\_PMT with program\_info\_length == 0 and ES\_info\_length == 0).*

### **G.4.3 Resolution**

Hosts have to send CA\_PMT even when selected program is in the clear.

## **G.5 CA\_PMT program number casting**

### **G.5.1 Problem description**

The receiver seems to cast the program number over 12 bits instead of 16 bits (refer to the DVB-CI specifications), in the CA PMT. Without the parental control functionality running, the CAM would have descrambled the service anyway. But with this functionality supported, it can not allow the descrambling without making sure that there is no parental control parameter configured for this service in the PAT/PMT and SDT/EIT tables.

### **G.5.2 Specification**

DVB-CI specifications define in EN50221 (§8.4.3.4 ; table 25) that program number SHALL be over 16 bits.

### **G.5.3 Resolution**

Program number has to be sent to CAM over 16 bits.

## **G.6 CA\_PMT clear to scrambled / scrambled to clear**

### **G.6.1 Problem description**

When a program switches from clear to scrambled and vice versa, the CA\_PMT is not sent by the host.

### **G.6.2 Specification**

It has been defined in Guidelines for Implementation and Use of the Common Interface for DVB Decoder Applications (R206-001:1998; §9.5.6.2) :

- *When one programme switches from scrambled to clear, there are several possibilities:*

1. *This change is not signalled in the PMT, but only in the TSC field of the packet header or in the PES\_SC field of the PES header. In this case, there is no reason for the host to send a new CA\_PMT to remove the programme from the list. The programme remains selected and the host keeps on sending CA\_PMT when the version\_number of the PMT evolves.*
2. *This change results in a modification of the PMT. In this case, a CA\_PMT is issued by the host.*

- *When one programme switches from clear to scrambled, there are several possibilities:*

1. *This change is not signalled in the PMT, but only in the TSC field of the packet header or in the PES\_SC field of the PES header. In this case, the host does not send a new CA\_PMT. The CA application must detect that switch.*
2. *This change results in a modification of the PMT (e.g : CA\_descriptors are removed). In this case, a CA\_PMT is issued by the host.*

*In both cases it is RECOMMENDED that the CA application attempt to create a user dialogue to inform the user.*

### **G.6.3 Resolution**

When the host detects a PMT change, it has to send a new CA\_PMT to the module.

## **G.7 PMT update and new CA\_PMT**

### **G.7.1 Problem description**

When the host detects that the PMT version has changed, it has to inform the CAM about this by sending a new CA\_PMT. Some hosts provide the information to the CAM by using the CA\_PMT\_Only object. This action is seen by the CAM as a zapping. This means that it will stop and restart descrambling filter and a black screen will be displayed.

### **G.7.2 Specification**

It has been described in R206-001:1998 (§9.5.5.1) that:

*If the host wants to update a CA\_PMT of one of the programmes of the list it sends a CA\_PMT with `ca_pmt_list_management == update`. This happens when the host detects that the `version_number` or the `current_next_indicator` of the PMT has changed. The CA application in the module then checks whether this change has consequences in the CA operations or not. It also happens when the list of elementary streams of a selected programme changes (e.g. : the user has selected another language). In this case, the host has to resend the whole list of elementary streams of that updated programme.*

### **G.7.3 Resolution**

When PMT version is changed, the CA\_PMT\_Update object has to be used in order to avoid black screen.

## **G.8 Spontaneous MMI**

### **G.8.1 Problem description**

The host does not allow the display of spontaneous MMIs (like error or download notification). Some hosts allow only MMI when the program is scrambled which is not correct.

Spontaneous MMIs are the only way for the CAM to notify messages to the user e.g. that the smart card is in error, that a new download is available or that the user has no authorisation to access the program (parental control or subscription issue).

### **G.8.2 Specification**

It has been defined in Guidelines for Implementation and Use of the Common Interface for DVB Decoder Applications (R206-001:1998; §9.5.6.1) :

*CA applications currently not active for any current programmes selected by the user may create MMI sessions for user dialogue, for example to warn of an impending PPV event on another programme previously purchased by the user.*

### **G.8.3 Resolution**

Display all MMI messages sent by CAM. Do not allow automatic MMI closing, let the user close by him/herself the MMI.

## **G.9 Transport Stream to CAM**

### **G.9.1 Problem description**

The host does not provide the transport stream to the CAM on a clear service. This has two major impacts:

This means that the availability of a download will be checked not at the first zapping on a new transponder, but at the first zapping on a scrambled service of a new transponder.

The EMM (subscription authorization) cannot be received by the smart card on a clear service. End user has to be tuned to a scrambled service with a black screen.

### **G.9.2 Specification**

DVB-CI specifications define in EN50221 (§5.4.3) that a transport stream connection has to be established if the module is found as DVB conformant. As a reminder, a specification extract is attached below in italic.

*When a module is not connected the Transport Stream Interface SHALL bypass the module, and the Command Interface to that module SHALL be inactive. On connection of a module, the host SHALL initiate a low-level initialisation sequence with the module. This will carry out whatever low-level connection establishment procedures are used by the particular Physical Layer, and then establish that the module is a conformant DVB module. If successfully completed, the host SHALL establish the Transport Stream connection by inserting the module into the host's Transport Stream path. It is acceptable that some Transport Stream data is lost during this process.*

### **G.9.3 Resolution**

Send always the transport stream to the CAM when it has been initialized.

## **G.10 Profile reply**

### **G.10.1 Problem description**

The host does not provide the Profile Reply to the CAM that waits for ever this information.

### **G.10.2 Specification**

DVB-CI specifications define in EN50221 (§8.4.1.1) that when a profile enquiry is sent by host or module, a profile reply has to be sent by module or host. As a reminder, a specification extract is attached below in italic.

*When a module is plugged in or the host is powered up one or perhaps two transport connections are created to the module, serving an application and/or a resource provider.*

The first thing an application or resource provider does is to request a session to the Resource Manager resource, which is invariably created since the Resource Manager has no session limit. The Resource Manager then sends a Profile Enquiry to the application or resource provider which responds with a Profile Reply listing the resources it provides (if any). The application or resource provider must now wait for a Profile Change object. Whilst waiting for Profile Change it can neither create sessions to other resources nor can it accept sessions from other applications, returning a reply of 'resource non-existent' or 'resource exists but unavailable' as appropriate.

### G.10.3 Resolution

Reply to profile enquiry object.

## G.11 Remote control / MMI\_Enq()

### G.11.1 Problem description

Some receivers don't send the right parameters after a remote control action by user. Most common errors are: bad implementation of numeric keypad, blind answer and length of answer. In some cases errors are related to Enq() object answer text.

### G.11.2 Specification

These features are described in DVB-CI specifications EN50221 in chapter 8.6.5.2. Table 47 (as shown below).

Table 47: Enq object coding

Syntax	No. of bits	Mnemonic
enq () {		
enq_tag	24	uimsbf
length_field()		
reserved	7	bslbf
blind_answer	1	bslbf
answer_text_length	8	uimsbf
for (i=0;i<enq_length-2;i++)		
text_char	8	uimsbf
}		

**blind\_answer** : set to 1 means that the user input has not to be displayed when entered. The host has the choice of the replacement character used (star, ...).

**answer\_text\_length** : expected length of the answer. Set to hex 'FF' if unknown by the Application.

#### text\_char

Text information is coded using the character sets and methods described in [4].

Correct behaviour has been defined in Guidelines for Implementation and Use of the Common Interface for DVB Decoder Applications (R206-001:1998; §9.8.5.4) :

The answ object returns a string of characters in response to an enq object. Each object can specify the character code tables used per DVB SI.

The code table used by the answ object shall be the same as that used by the enq object.

This dialogue is primarily provided to allow PIN entry. So, hosts are only required to allow input of the numbers 0-9. The minimum input character coding required is ISO 6937:1994 (DVB SI's default character table). Thus, all hosts shall, as a minimum, support input of the characters 0-9 coded on the character codes 0x30-0x39 per ISO 6937.

### **G.11.3 Resolution**

Receivers shall handle well blind answer and answer\_text length in order to avoid user to enter more number than expected (host has to close the MMI when the expected char number is reached). Character code in text\_char shall respect ISO 6937:1994.

## **G.12 Remote control / MMI\_answ()**

### **G.12.1 Problem description**

Some receivers don't send the right parameters after a remote control action by user. Most common error is CANCEL instead of OK.

### **G.12.2 Specification**

These features are described in DVB-CI specifications EN50221 in chapter 8.6.5.3. As a reminder, values of Answ\_id are attached in table below.

### **G.12.3 Resolution**

Receivers SHALL handle well Answ() object.

## **G.13 Remote control / MMI\_Menu answ()**

### **G.13.1 Problem description**

Some receivers don't send the right parameters after a remote control action by user. Most common errors are bad 1 instead of 2 etc...

### **G.13.2 Specification**

These features are described in DVB-CI specifications EN50221 in chapter 8.6.5.5. As a reminder, choice\_ref explanation is attached below in italic.

*choice\_ref : the number of the choice selected by the user. If the object was preceded by a menu object, then choice\_ref = 01 corresponds to the first choice that had been presented by the application in that object (first choice text after the bottom text in the menu object) and choice\_ref = 02 corresponds to the second choice text presented by the application. choice\_ref = 00 indicates that the user has cancelled the preceding menu or list object without making a choice.*

### **G.13.3 Resolution**

Receivers SHALL handle well Menu\_answ().

## **G.14 MMI Module Name**

### **G.14.1 Problem description**

Some receivers don't display the module name given in application\_info() object. They display a generic name like module or DVB-CI CAM. This may confuse the end user.

### **G.14.2 Specification**

This feature is described in DVB-CI specifications EN50221 in chapter 8 4.2.2. Please find below an extract in italic.

*menu\_string\_length*

*All applications have a user menu tree, of which this is the top-level entry point, and it is made available as a subtree somewhere in the host's own menu tree. It is followed by a*



sequence of characters which is the title of the menu entry. The host is free to decide the structure of its own menu tree but it may use the *application\_type* field to group menu entries of similar applications. The 'menu' may in fact be a simple display with no user interaction, or it may be a complex set of menu screens to allow sophisticated user interaction.

### **G.14.3 Resolution**

Display the right name of module in MMI menu.

## **G.15 MMI – Text length**

### **G.15.1 Problem description**

Some receivers truncate the text sent by the module, then, the information is not comprehensible by the user.

### **G.15.2 Specification**

The Guidelines for Implementation and Use of the Common Interface for DVB Decoder Applications (R206-001:1998; §9.8.4.1) specify that:

#### *High level mode*

*When responding to enq, menu or list objects all hosts SHALL be able to communicate to the user at least the first 40 characters of any string and SHALL be able to tolerate (possibly by truncation) strings of any length. All hosts SHALL be able to communicate to the user menu and list objects where the number of menu/list items is in the range 0 to 20.*

*The choice\_nb = 0xFF and item\_nb= 0xFF permit the application to not know the length of the list at the time that it outputs the first MENU\_more or LIST\_more object. The host, therefore, is required to count the menu/list items until a "last" object is received indicating the end of the list.*

*All hosts SHALL support entry of strings of up to 40 characters in response to a enq object.*

*If, when responding to an enq object, the user attempts to enter more characters than the host is able to accept (or more characters than the parameter answer\_text\_length) then the host SHOULD give a clear indication to the user.*

### **G.15.3 Resolution**

Display a minimum of 40 characters for any string. Extra requirement is that a minimum of 50 characters have to be displayed for any string.

## **G.16 MMI – Menu or list object**

### **G.16.1 Problem description**

Some receivers don't display sub title or bottom text. They may include important information to the end user and have to be displayed.

### **G.16.2 Specification**

This feature is described in DVB-CI specifications EN50221 in chapter 8 6.5.4 and 8.6.5.6. An extract of the standard is shown below in italic.

*A menu is made of one Title, one sub-title, several choices and one bottom line. Text objects with text\_length = 0 can be used (e.g. if no sub-title or no bottom text are used).*

*Item\_nb = 'FF' means that this field does not carry the number of items information.*

*The way the host has to display the title, sub-title, bottom text and items is manufacturer dependant. For example, the host is free to display the items on several pages and to manage itself the page-down and page-up functions.*

### **G.16.3 Resolution**

Displays all title, subtitle, choice and bottom text.

## H. MHP CA API Implementation Guidelines for non CA smart cards

### H.1 Purpose

Scope of this Annex is to provide implementation guidelines for MHP CA API to be used with a Non-Ca Smart Card.

The reference CA API is version 1.2.

The complete JavaDoc is delivered within a separated file which DGTVi will provide on request to any interested party.

Only classes and methods here defined must be implemented; it's up to the programmer not to use the others.

In the case other classes are instantiated or other methods are called, they should not work, which means *null* should be returned if necessary or no effects should be caused for methods without a return value.

The aim of this specific implementation is to provide a way for MHP applications to know the general status of a smart card reader compliant with ISO 7816 specifications.

This implementation will not interfere with Conditional Access smart cards, which means no critical classes or methods will be required.

In the next sections, used classes, interfaces and methods are defined. In last section, an example is given.

All the exceptions that could be thrown using the required methods should obviously be implemented. Any other class, method, static value or interface not defined in this document should not be implemented.

### H.2 Package `it.dtt.ca`

#### H.2.1 *CaManager*

In this implementation this class will be used only to monitor smart card reader status.

##### H.2.1.1 Constructor

Requested for implementation.

##### H.2.1.2 `getCAProvider`

Should return the string "SATSA", in capital letters as typed here.

##### H.2.1.3 `getClient`

Returns the resource client associated to this object.

##### H.2.1.4 `getSlots`

This will return an array of Slot objects, each one associated to one physical smart card reader. If only one reader is present, as often happens currently, it must be associated to first position in the array.

#### H.2.2 *CaManagerFactory*

This class is the entry point to interact with the smart card reader. Only one actor at the same time can have a session opened.

### **H.2.2.1 closeSession**

Only once the session is closed, another one can be opened.

If this method is called when no session is opened, the exception *NoSessionOpenedException* will be called.

If the ResourceClient passed in as a parameter is not the same that was passed opening the session, the exception *OwnerUnknownException* will be called.

### **H.2.2.2 getInstance**

This method will enable the process of interacting with the smart card status. In any case communication cannot work before *openSession* is called.

To initialize the MHP CA API to work with a generic ISO 7816 smart card reader, these two parameters as inputs to the method should be used:

provider = "SATSA"

broadcaster = "ANY"

This method will return an instance of *CAManagerFactory* that will allow opening a session.

If the API is not implemented to support a Non-Ca Smart Card, it should throw the exception *NoSuchProviderException*.

The exception *AccessDeniedException* will never be thrown in case of Non-Ca Smart Cards.

### **H.2.2.3 openSession**

Once the *CAManagerFactory* has been instantiated, this method call will enable a session.

Only one actor at a time can call this method.

Once the session is opened and till it's not closed, any other call to this method will end up with the API throwing *SessionAlreadyOpenedException*.

## **H.2.3 CaObject**

Requested class.

### **H.2.3.1 Constructors**

Requested for implementation.

### **H.2.3.2 Methods**

Requested for implementation.

## **H.2.4 CaSession**

Requested class.

### **H.2.4.1 Constructors**

Requested for implementation.

### **H.2.4.2 Methods**

Requested for implementation.

## **H.2.5 Slot**

This class represent the physical smart card reader on the Set-Top box.

### **H.2.5.1 Constructors**

Requested for implementation. If only one reader is present, id 0 should be used.

**H.2.5.2 addSlotListener**

Requested.

**H.2.5.3 getSlotID**

If only one reader is present, this method call will return 0.

**H.2.5.4 getSmartCard**

This method is not required.

**H.2.5.5 getStatus**

This method will get current status of the smart card reader. The possible return values are the ones defined for *SlotEvent*.

**H.2.5.6 removeSlotListener**

Requested.

**H.3 Package it.dtt.ca.event**

**H.3.1 CaEvent**

The implementation of this object is required to support the use of its derived class *SlotEvent* only. Other types of events are not requested.

**H.3.2 SlotEvent**

Any time a change is notified in the smart card reader status, one *SlotEvent* is thrown. In the table below, all the possible events are shown with the specific parameters with whom the events should be generated (type, data, description) and the return value for *toString()* method call. The *CARD\_ACCESS\_DENIED* is not used because once a valid smart card is inserted into the reader, the API has not any other way to communicate with a specific smart card provider software (I.e. with a CA Kernel from any Conditional Access provider)

Type	Data	Description	toString()
<b>CARD_ERROR:</b>			
<i>this is thrown when the reader is able to communicate with the smart card but the smart card does not reply to a reset command</i>			
352	Null	"Card Error"	"SlotEvent.CARD_ERROR"
<b>CARD_IN:</b>			
<i>the smart card is inserted into the reader</i>			
350	Null	"Smart Card inserted"	"SlotEvent.CARD_IN"
<b>CARD_MUTED:</b>			
<i>the reader finds a smart card is inserted but there is no electrical communication</i>			
353	Null	"Offers on-air update"	"SlotEvent.CARD_MUTED"
<b>CARD_OUT:</b>			
<i>the smart card is removed from the reader</i>			
351	Null	"Smart Card removed"	"SlotEvent.CARD_OUT"
<b>CARD_VERIFYING:</b>			
<i>the reader is verifying the status</i>			
355	Null	"Smart Card reader verifying"	"SlotEvent.CARD_VERIFYING"
<b>ERROR_UNKNOWN:</b>			
<i>thrown when there is any other error trying to communicate with the smart card reader</i>			

356	Null	"Generic Smart Card reader error"	"SlotEvent.CARD_UNKNOWN"
-----	------	-----------------------------------	--------------------------

### H.3.3 SlotListener

This interface must be implemented by any application wanting to monitor the status of the smart card reader.

### H.3.4 SlotEventReceived

Requested.

## H.4 Example

This simple example shows how this implementation of the CA API, could be used.

```

public class Example implements SlotListener,
    ResourceClient;

. . .

CAManagerFactory factory;
CAManager manager;
Slot reader;
Slot[] slots;

. . .
/* Initialization of the API */
try {
    factory =
        CAManagerFactory.getInstance(
            "SATSA", "ANY");
} catch (NoSuchProviderException) {
    System.out.println("This API does not
        support ISO 7816 generic
        smart card reader monitoring");
}

/* Creation of the manager */
try {
    manager =
        factory.openSession(this);
} catch (SessionAlreadyOpenedException) {
    System.out.println("There is already
        an application using the CA API");
}

try {

/* Getting smart card reader (single reader on the STB) */
slots = manager.getSlots();
reader = slots[0];

/* Checking current status */
if (slot.getStatus != SlotEvent.CARD_IN)
    System.out.println("There is a problem with the

```

```
        card");

    /* Attaching the listener */
    reader.addSlotListener(this);

    catch (SessionClosedException) {
        System.out.println("The session has been closed");
    }

    . . .

    public void slotEventReceived(SlotEvent event) {
        System.out.println("Error number "+event.getType()+"-"
            +event.getDescription());
        if (event.getType == SlotEvent.CARD_OUT)
            System.out.println("Card was removed");
        ... }
}
```

*Page intentionally left blank*



## I. The new SATSA target

### I.1 Introduction

SATSA's Generic Connection Framework calls for opening a Connection to a Java application, identified by an ID (the AID). The vast majority of the cards issued in Italy, are standard based but unfortunately are not Java cards. Although an Application ID(s) could be, in theory, also set on these cards, this is not mandatory and most cards have issued without. It has been proved under test that any `Connector.open("apdu...;target=a0.00...")` issued against such cards returns a **ConnectionNotFoundException**. This is because the card has neither an AID set nor is a Java card with such application "listening". It has also been noticed that a `Connector.open("apdu...;target=SAT")` may also return **NotImplemented** as this is normally used on (U)SIM as defined per SIM Application Toolkit mode and the SATSA layer implementer may have made no provision for it. The above behaviors result in not being able to extract the data from the card. This is a technical downgrade as far as the OCF previous implementation is concerned, especially for a long awaited and final solution for the DTT smart card realm as the SATSA choice promised to be.

### I.2 Proposed solution

The proposed solution is based upon the following thoughts:

- The first step consists in defining a new target, namely CXS, for the `Connector.open` as in `Connector.open("apdu:0,target="CXS")` as an example
- Only when `target=CXS` is selected (and only in this case), if the SATSA layer enters into a "no card application" branch, instead of raising a `ConnectionNotFoundException`, the implemented SATSA layer will return the `APDUConnection` object successfully (i.e. no exception is raised).
- Once the `APDUConnection` object is returned, the requesting MHP application may initiate and continue to exchange APDUs as usual (`exchangeAPDU()`) and eventually close the connection.

### I.3 Solution advantages

The proposed solution has the following advantages:

- It would not impact any `target=SAT` implementation, if already in place in the implemented SATSA layer. On the other end it would not call for `target=SAT` implementation if is not in already in place (this is/could be nice on the SATSA layer implementer side).
- It will relief the MHP applications from coding envelope APDUs and the SATSA layer from unpacking envelopes when this is not explicitly needed (this is the case for Italian CNS, CRS and CIE)
- It will also work for chip cards which being ISO 7816 compliant have, nevertheless, evolved differently from the e-government cards (namely CNS, CRS or CIE) standards
- This approach is also compatible with smart cards which are not Java cards but have or manage Application IDs. In this case both `target=CXS` and `target=a0.00....` (whatever) strings could be used interchangeably.

### I.4 An example

Applications running in a SATSA implementation that supports opening a connection with `target = CXS`, can communicate with the smart card OS by using `APDUConnection`.

There are various constraints on this type of usage, which are definitively detailed by the DVB and DGTVi relevant documents related to *Security and Trust Services API*

*Specification.* Further limitations may apply within the smart card issuer (i.e. the issuing institution or enterprise) or the smart card manufacturer. Opening a connection using CXS is straightforward. The following example attempts a CXS connection on slot 0.

```
APDUConnection cxs;  
cxs = (APDUConnection)Connector.open("apdu:0;target=CXS");
```

Once the connection is established, the application can send APDU commands to the smart card using the `exchangeAPDU()` method. Use the `exchangeAPDU()` method to send a command to a card application and receive a response. Pass a byte array containing a command APDU to `exchangeAPDU()`. The command is sent to the card. When the card sends its response APDU, this method returns the response as another byte array. A variety of exceptions might be thrown if communications failures or other disasters occur.

```
byte[] apdu = {  
(byte)0x00, (byte)0x20, (byte)0x00, (byte)0x82, (byte)0x04,  
(byte)0x01, (byte)0x02, (byte)0x03, (byte)0x04, (byte)0x00  
};  
byte[] response = cxs.exchangeAPDU(apdu);
```

The `exchangeAPDU()` method blocks until a response is received from the card application. To close an `APDUConnection`, simply call its `close()` method as shown in the following example.

```
cxs.close();
```

If you close a connection that is being used by other threads to exchange APDUs, the connection is closed immediately and the `exchangeAPDU()` methods in other threads throw `InterruptedException`.

---

## J. Requirements and recommendations for combo satellite/terrestrial receivers

### J.1 Service lists

#### J.1.1 Separate service lists

The receiver is required to keep at least 2 distinct favourite lists, each one using the same 1-999 numbering range, for satellite platform's (e.g. Tivusat) bouquet and for DTT (DGTVi) services.

Automatic ordering of services within those 2 lists is based on each respective LCN schema. For the terrestrial part all the rules and procedures specified in HD-Book DTT [39], in particular those dealing with conflicts, duly apply.

Switching from one list to the other should be as fast and easy as possible, ideally through a dedicated key on the remote control.

#### J.1.2 Seamless service lists

A "seamless service list", i.e. a single list including both satellite and terrestrial services, would be very valuable for end users, especially if services were automatically sorted out according to broadcasters' LCNs. The problem is how to handle (potentially numerous) DTT-SAT LCN conflicts. They will in fact be of 4 kinds:

- (1) exactly the same service received with the same LCN both on SAT and DTT
- (2) almost the same service received with the same LCN on SAT and DTT (this is the case of services which on DTT at certain hours of the day may differ at regional level)
- (3) different services with the same LCN on SAT and DTT
- (4) different services with the same LCN on DTT, i.e. the normal D-Book conflict case

How to deal with all these kinds of conflicts is in general left to manufacturers offering a seamless service list on their receivers. A not exhaustive list of not exclusive solutions possibly adopted by a manufacturer here follows.

#### 1. Manual resolution

As conflicts of type (1) and (2) are even difficult to recognize at pure technical level while type (3) and (4) should be left to users' choice, the manual resolution option, although potentially cumbersome for users, should always be available.

#### 2. Automatic resolution

Whenever a SAT-DTT LCN conflict is detected either SAT or DTT service is preferred based on a dedicated menu option. Factory default preference is left to manufacturer. User preference could be requested at (re)installation time.

#### 3. Allotted list

Based on a dedicated menu preference, the seamless service list is allotted as follows:

- if the preference is set to SAT, satellite platform's (e.g Tivusat) services are listed from position 1 to position 999 according to LCN values defined by this specification. DTT services are instead listed from position 1001 to position 1999 by adding a 1000 offset to the LCN value defined by HD-Book DTT specification [39]. All remaining satellite channels outside satellite platform's (e.g Tivusat) bouquet are listed from position 2001 on.

- if the preference is set to DTT, DTT services are listed from position 1 to position 999 according to LCN values defined by HD-Book DTT specification [39]. Satellite platform's (e.g Tivusat) services are instead listed from position 1001 to position 1999 by adding a 1000 offset to the LCN value defined by this specification. All remaining satellite channels outside satellite platform's (e.g Tivusat) bouquet are listed from position 2001 on.

Factory default preference is left to manufacturer. User preference could be requested at (re)installation time.



***Printed in February 2010***  
***by Meti S.a.s. Rota Greca (CS) - Italy***  
***on behalf of Associazione HD Forum Italia***  
*Via Baldassarre Castiglione, 59*  
*00142 Roma*  
*[www.hdforumitalia.org](http://www.hdforumitalia.org)*